RECEIVED

JAN - 4 2012

BOULDER COUNTY
BUILDING DIVISION

Land Use Department Building Division

2045 13th Street • PO Box 471 • Boulder, Colorado 80302
Phone: 303-441-3925 • Fax: 303-441-4856
Email: building_official@bouldercounty.org
http://www.BoulderCounty.org/lu/
Office Hours: Monday — Friday 8:00 AM to 4:30 PM.
Permits can be applied for until 4:00 PM

Intake Stamp

Permit # Sticker BP-12-0016

Building Permit Application

Project Street Address	City	State	Zip Code
5134 UTE HWY	LONGMONT	CO	80503

Owner's Name ☐ Cont--			Primary Phone Number
Cemex + RD Smith			3 823 2128
Address			**Secondary Phone Number**
City	**State**	**Zip Code**	
Email Address			**Fax**

Business/Contractor Name ☐ Contact			Contractor License #
(STEPHANIE S. BODIE/CSA)			T.B.D
Address			**Primary Phone Number**
5935 S. ZANG ST. #200			303.932.9974
City	**State**	**Zip Code**	**Secondary Phone Number**
LITTLETON	CO	80127	303.210.8172
Email Address			**Fax**
sbodie@csainet.com			303.932.6561

Project Description
REMOVE & REPLACE ANTENNAS, ADD ANTENNAS & COAX
ROUTE FIBER CONDUIT TO (E) EQ. SHELTER

Project Valuation
$ 15,000

Project Includes: ☐ Plumbing ☑ Electrical ☐ Mechanical

Type of Project (Check Only One)	Type of Structure (Check Only One)	
☐ (01) New Structure	☐ (01) One Family Dwelling	☐ (12) Office, Bank, and Professional Building
☐ (02) Addition to: _____	☐ (02) Two Family or Attached Dwelling (including townhouse)	☐ (13) School
☑ (03) Remodel	☐ (03) Three and Four Family Dwelling	☐ (14) Store, Customer Service
☐ (04) Electrical	☐ (04) Hotel or Motel	☐ (15) Barn, Storage Shed, Outbuilding
☐ (07) Demolition of Structure	☐ (06) Amusement and Recreation Building	☐ (16) Mobile/Manufactured Home
☐ (08) Change of Use	☐ (07) Church and Other Religious Building	☐ (22) Public Works, Utility Building
☐ (09) Moved-in Structure	☐ (08) Industrial Building, Manufacturing Plant, and Factory	☐ (23) Pool, Hot Tub, Fence, Retaining Wall, Pump (Non-structure)
	☐ (09) Service Station and Repair Garage	☑ Other: (E) TELECOM FACILITY
	☐ (10) Detached Garage	

	Existing Building	New Construction	Existing & New Total
Height of Structure From Existing Grade:	149' 6 Ft.	(E) Ft.	N/A Ft.
Number of Bedrooms:	N/A	N/A	N/A
Number of Bathrooms:	N/A	N/A	N/A
Property Size:	Sq. Ft.	Sq. Ft.	Sq. Ft.

Proposed New Building or Addition N/A

Structure	Size Finished	Size Unfinished
Basement:	Sq. Ft.	Sq. Ft.
First Floor:	Sq. Ft.	Sq. Ft.
Second Floor:	Sq. Ft.	Sq. Ft.
Third Floor:	Sq. Ft.	Sq. Ft.
All Other Floors:	Sq. Ft.	Sq. Ft.
Garage:	Sq. Ft.	Sq. Ft.
Deck:	Sq. Ft.	Sq. Ft.
Covered Porch:	Sq. Ft.	Sq. Ft.

Setbacks (Distance of Project to Property Lines)

	Front	Side	Side	Rear
Existing:	(E) Ft.	(E) Ft.	(E) Ft.	(E) Ft.
Proposed:	Front Ft.	Side Ft.	Side Ft.	Rear Ft.

Water Service (Check One)	Sewer Service (Check One)	Electrical Service (Check One)	Gas Service (Check One)	Access (Check One)
☐ Individual Well	☐ Septic Tank	☐ Xcel Energy	☐ Xcel Energy	☑ Existing Driveway
☐ Community Well	☐ Vault	☐ United Power	☐ Propane	☐ New Driveway
☑ N/A	☑ N/A	☐ Estes Park	☑ N/A	☐ N/A
☐ Public: _____	☐ Public: _____	☐ Poudre Valley Rea	☐ Other: _____	☐ Other: _____
		☐ Longmont		
		☑ N/A		

Certification: I certify that the above information is correct and agree to construct this building in accordance with the plot, building plans and specifications submitted herewith, and in strict compliance with all the provisions of the Zoning Ordinance, Building Code, and Health and Plumbing Regulations of Boulder County.

Applicant (Please Print)	Signature	☐ Owner ☐ Contractor ☒ Agent	Date
CHARLES STECKLY			1/04/2012

BP-12-0016

Parcel Report

Land Use Department
Courthouse Annex
2045 13th St. - 13th & Spruce Streets
P.O. Box 471 Boulder Colorado 80306-0471
www.bouldercounty.org
Planning 303-441-3930 Building 303-441-3925

PROPERTY INFORMATION

Parcel Number	Section	Township	Range
120328000001	28	3N	70

Subdivision: TR, NBR 990 - COMMERCIAL

Site Address(es) on this Parcel: 5134 UTE HY

Owner(s) of this Parcel: CEMEX INC

LOCATION INFORMATION

Zoning (On or Adjacent)	Open Space Ownership (On or Adjacent)	County Plats (On or Adjacent)	Estimated Sq Ft	Estimated Acres
Agricultural	CE BRALY SE SUB		37738557	866.36
Agricultural	COS WESTERN			
Agricultural, Floodplain Overlay	MOBILE			
General Industrial	COS			
General Industrial, Floodplain Overlay	MONTGOMERY (DONALD)			
	COS WESTERN			
	MOBILE			
	COS WESTERN			
	MOBILE			
	COS WESTERN			
	MOBILE			

Note: The estimate acres will likely not match the recorded acreage of the property, please see the legal description, plat, or deed for the actual acreage. Because of small inconsistencies in the locations of lines in the map layers, this location information searches may show information from adjacent parcels even though no overlap is visible on the screen. View the map at an approprate scale to resolve any uncertainty.

LAND USE HISTORY

On Parcel Number: 120328000001 or Address: 5134 UTE

Note: Parcel numbers and addresses may change over time. Only permits/dockets with the exact same parcel number or address at the time of application are shown.

Permit/Docket Parcel Number(s)	Type Permit/Docket Address(es)	Application Name Application Date	Application Status	Status Date
BP-12-0016	Commercial Remodel	5134 Ute Hwy		
120328000001	5134 UTE	1/4/2012	Zoning Queue	1/4/2012
Fiber Optic Conduit to Existing Equipment Structure / Replace 12 Antennas & Add 6 Antennas				
PAC-11-0113	PreApplication Conference	Closser, Dave		
120328000001	5134 UTE	10/12/2011	PAC Held	10/24/2011
Discussed Telecom Facility at Cemex, a formal pre-application meeting was not held.				
NWE-10-0068	Noxious Weed Enforcement	Mediteranean Sage		
120329400011	5134 UTE	6/11/2010	Closed Abated	6/21/2010
Med sage and toadflax on the property.				
NWE-09-0074	Noxious Weed Enforcement	CEMEX INC		
120328000001	5134 Ute	5/12/2009	Closed Abated	9/15/2009
Kurt Roy reports Diffuse knapweed on south side of operations. After walking property with Pat Fischer and Maribel Aguilos. we also identlfed Musk thistle, Yellow and Dalmatian toadflax. Ron West reports Mediterraean sage also. MANAGEMENT PLAN RECEIVED. WILL MONITOR PROPERTY EVERY OTHER DAY & SPOT SPRAY OR PULL WEEDS AS NEEDED. FOLLOWING PLAN. RESOLVED.				
BP-08-1907	Electrical Service Change			
120328000001	5134 UTE	12/9/2008	Expired	12/21/2011
INSTALL 3 PANEL ANTENNA ON EXISTING BUILDING				
BP-08-0871	Commercial Addition			
120328000001	5134 UTE	6/2/2008	Final Inspection Complete	8/19/2008
INSTALL DUST COLLECTOR ON UNLOADING SYSTEM				

BP-07-0762	Electrical Service Change			
120328000001	5134 UTE	5/30/2007	Final Inspection Complete	6/13/2007
RUNNING POWER TO PARTICULATE METER				
BP-07-0598	Electrical Service Change			
120328000001	5134 UTE	5/3/2007	Expired	3/8/2011
INSTALL 3 GROUPS OF PANEL ANTENNAS				
ZON-07-028	General Zoning Enforcement	CEMEX INC		
120328000001	5134 Ute	3/13/2007	No Violation Found	4/13/2009
(NO VIOLATION FOUND) Materials being dumped to fill in "C Pit"				
SU-06-016	Special Review	CINGULAR WIRELESS (Cemex Inc.) Tele		
120328000001	5134 Ute	9/13/2006	BOCC Approved	11/24/2009
Special Use Review / Site Specific Development Plan for a telecommunications facility to allow three (3) groups of panel antennas and attendant equipment at the top of the CEMEX cement plant silo. The antennas will be mounted flush with the side of the silo, and the equipment will be placed on the roof deck of the silo. ****7 Year Review Required in 2013****				
PAC-06-131	PreApplication Conference	KELLY (program director)/ CINGULAR		
	5134 Ute	7/27/2006		
Special Use Review for CEMEX plant to add Cingular Wireless Users				
BP-06-0692	Commercial Remodel			
120328000001	5134 UTE	1/25/2006	Expired	3/8/2011
INSTALL TWO 100GAL WATER HEATERS IN THE OFFICE BLDG				
NWE-05-012	Noxious Weed Enforcement	CEMEX INC.		
120328000001	5134 Ute	6/3/2005	Closed Abated	10/23/2009
Med Sage reported by Tim. Cleaned-up. CLOSED.				
BP-05-0129	Commercial Remodel			
120328000001	5134 UTE	1/25/2005	Expired	3/8/2011
REPLACE EXISTING CONDITIONING TOWER				
BP-04-1670	Commercial Remodel			
120328000001	5134 UTE	9/28/2004	Expired	11/21/2007
STOREROOM MODIFICATIONS(APPLICATION EXPIRED-11/21/07)				
BP-04-1389	New Residence			
120328000001	5134 UTE	8/17/2004	Expired	11/21/2007
TEMPORARY OFFICE TRAILER(APPLICATION EXPIRED-11/21/07)				
AP-03-003	Appeal of Interpretation	CEMEX Appeal #1		
120328000001	5134 Ute	7/11/2003		
Appeal of the Land Use Director's decision that there has been no five-year period of inactivity for the tire burning use originally permitted by special use permit/certificate of designation #SU-88-21 (aka Resolution #90-59) and that the special use is still in effect.				
AP-03-004	Appeal of Interpretation	CEMEX Appeal #2		
120328000001	5134 Ute	7/11/2003		
Appeal of Land Use Director's decision regarding Docket AP-02-03: SIERRA CLUB Appeal Remand: a remand by the Board of Adjustment to determine wheter there has been a five-year period of inactivity under the Permit (SU-88--21) since the enactment of BCLUC 4-604(C).				
SU-03-05	Special Review	CEMEX (Lyons Cement Plant) SU/SSDP		
120328000001	5134 Ute	5/8/2003	Expired	12/15/2009
SU never processed due to long litigation process. Copy of conceptual file was filed under SU-03-05 for research purposes.				

PAC-03-032	Special Review	CEMEX INC.		
120328000001	5134 Ute	4/3/2003		
TIRE BURNING				
AP-02-003	Appeal of Interpretation	SIERRA CLUB Appeal		
120328000001		10/1/2002		
Appeal of the Land Use Director's determination of September 5, 2002, that special use permit/certificate of designation Docket SU-88-21 is still In effect.				
BP-01-2179	Commercial Remodel			
120328000001	5134 UTE	12/12/2001	Final Inspection Complete	2/11/2002
INSTALL PCS EQUIP & ANTENNAS ON CEMENT PLANT - FINAL INSPECTION COMPLETED ON 2/11/02 BY J.H.				
SU-01-08	Special Review	QWEST WIRELESS (Cemex Cement Plant)		
120328000001	5134 Ute	6/6/2001	BOCC Approved	12/23/2009
Special Use Review / Site Specific Development Plan for a telecommunications facility exceeding the height limitation of the district in which the facility is located.				
BP-01-0494	Grading			
120328000001	*5131 UTE*	4/9/2001		
SIGN REPLACEMENT				
BP-00-1207	Electrical Service Change			
120328000001	5134 UTE	7/5/2000	Final Inspection Complete	12/5/2000
CELLULAR ANTENNA SITES				
BP-00-0872	Electrical Service Change			
120328000001	5134 UTE	5/24/2000	Final Inspection Complete	5/31/2000
ELEC FOR WATER PUMP MAIN PLANT				
V-98-001	Vacation of a Public Road or Easement	COUNTY RD 49 Vacation Amendment		
120321000046	5134 Ute	1/7/1998		
Amendment to Docket V-93-8 in order to not vacate portions of County Road 49.				
BP-97-1785	Residential Accessory Building			
120328000001	5134 UTE	11/17/1997	Final Inspection Complete	4/20/1998
TELECOM SITE/WALL MOUNTED				
SPR-97-160	Site Plan Review	SOUTHDOWN INC / US WEST NEWVECTOR G		
120328000001	*5134 Ute Hwy*	7/30/1997		
Site Plan Review for the placement of a telecommunications antenna on existlngs silos and structures, and the placement of a 120 prefabricated equipment shelter. Minor Modification approved 10/24/2011 - see documents.				
SU-96-30	Special Review	SOUTHDOWN INC Rooftop Antenna		
120324000013	5134 Ute	11/6/1996	BOCC Approved	12/29/2009
Special Use Review / Site Specific Development Plan for a Telecommunications Facility to place antennas on an existing cement silo exceeding the height limitation of the zoning district.				
LS-96-0243	Land Survey Plat			
120328000001		10/9/1996		
CORRECTIONS IN TITLE & LEGAL DESC. TO LAND SURVEY PLAT LS-94-0097, SW PORTLAND CEMENT CO.,SEC.20,21,28,29,T3N,R70W				
SU-96-18	Special Review	WESTERN MOBILE BOULDER, INC.		
120328000001	*4901 Ute*	6/6/1996	BOCC Approved	12/29/2009
An Amendment to an existing Special Use for mining operations on a total of 881 acres. Subdivision exemption for the creation of two lots. Repealing dockets SU-69-476 (also known as Docket # 476), as amended (including SU-84-18). and SU-80-26, as amended (including SU-92-02).				

SE-96-18	Subdivision Exemption	WESTERN MOBILE BOULDER, INC.
120328000001		6/6/1996
See Docket SU-96-18 for more information		
BP-94-2566	New Commercial Building	
120328000001	*13301 53RD*	12/12/1994
OFFICE TRAILER		
LS-94-0097	Land Survey Plat	
120328000001		4/13/1994
SW PORTLAND CEMENT CO., 70 ACRES. ALSO IN 21,28,29,3N,70.		
BP-90-0230	Commercial Addition	
120328000001	*12897 51ST*	3/21/1990
REPAIR GAS LEAK/NEW WATERLINE		
SU-88-21	Special Review	LYONS RUBBER RECYCLING CENTER
120328000001	5134 UTE	11/10/1988
Special Use and Certificate of Designation for Solid Waste Disposal Site. use of tires as fuel for cement manufacture		
BP-84-0182	New Commercial Building	
120328000001	5134 UTE	3/14/1984
FOUNDATION FOR CLINKER COOLER		
BP-81-0071	Electrical Service Change	
120328000001	*4831 HYGIENE*	1/28/1981
elec for traffic light		
BP-78-23408	Electrical Service Change	
120328000001	5134 UTE	7/12/1978
ELEC FOR NEW PUMP		
BP-78-22476	Commercial Remodel	
120328000001	5134 UTE	10/3/1977
REPAIR OVERHEAD DOOR		
BP-75-19820	New Commercial Building	
120328000001	5134 UTE	9/11/1975
SHOP		
BP-73-18153	New Commercial Building	
120328000001	5134 UTE	12/19/1973
COAL STORAGE SILO		
BP-70-13156	Unlighted Free-standing Sign	
120328000001	5134 UTE	10/9/1970
SIGN FOR CEMENT PLANT		
BP-67-10137	Commercial Addition	
120328000001	5134 UTE	9/22/1967
SUPERSTRUCTURE FOR CEMENT PLANT		
BP-66-9358	New Residence	
120328000001	*12350 FOOTHILLS*	9/22/1966
NEW RES		

BP-65-8040	New Commercial Building	
120328000001	5134 UTE	4/27/1965
EARTHWORK & FOUNDATIONS FOR CEMENT PLANT		
BP-79-0463	Commercial Remodel	
120328000001	5134 UTE	3/3/1953
COMBUSTION CHANGE/KILN		
BP-80-0619	Electrical Service Change	
120328000001	5134 UTE	3/3/1953
ELEC FOR MOBILE HOME		
BP-79-0324	Commercial Addition	
120328000001	5134 UTE	3/3/1953
ENLARGE STORAGE BLDG		
BP-79-0513	Manufactured Home	
120328000001	12897 51ST	3/3/1953
5 CONSTRUCTION MOHOS		

RECENT DEEDS

Date	Type	Rcptn No	Amount	Grantor	Grantee
12/19/1997	SW	1756839	$0		
11/7/1994	SW	1477357	$0		
6/1/1994	SW	1432787	$818,000		
4/21/1993	QD	1284471	$0		
4/5/1984	SW	613148	$42,000,000		

ASSESSOR'S ACCOUNT INFORMATION

Account Number / Site Address / Legal Description	Assessed Acres	Owner / Owner Address
R0127174	0.00	CEMEX INC
5134 UTE HY , LONGMONT		PO BOX 529
PORTIONS OF SECS 20,21,27,28 29,32,33 3N-70 OF TOTAL 813.79 ACS. LIMESTONE PRODUCTION ON 316.79 ACS (LYONS QUARRY)		LYONS, CO 80540

ASSESSOR'S STRUCTURE INFORMATION

Building	Class	Design	Year Built	Remodeled
1	MANUFACTURING/PROCESSING IMP	MANUFACTURING	1960	0

Floor Area	Sq Ft	Structure Information	
MANUFACTURING	181928	CONST	TEES/TILT
		LAND_PERCENT	40% LAND RATIO

Building	Class	Design	Year Built	Remodeled
2	SINGLE FAM RES IMPROVEMENTS	1 STORY - RANCH	1960	0

Floor Area	Sq Ft	Structure Information	
FIRST FLOOR (ABOVE GROUND) FINI	1508	CONST	FRAME
PORCH AREA	260	EXT_WALL_PRIMARY	FRAME WOOD/SHAKE
SUBTERRANEAN BASEMENT UNFINIS	1508	FOUNDATION	CONCRETE
		LAND_PERCENT	40% LAND RATIO
		ROOF_DSN	GABLE

Building	Class	Design	Year Built	Remodeled
3	SINGLE FAM RES IMPROVEMENTS	GENERAL PURPOSE BARN	1960	0

Floor Area	Sq Ft	Structure Information
GENERAL PURPOSE BARN	840	

Building	Class	Design	Year Built	Remodeled

Floor Area	Sq Ft	Structure Information

ESTIMATED RESIDENTIAL FLOOR AREA

Build#	Sq Ft	Code
2	1508	FIRST FLOOR (ABOVE GROUND) FINISHED AREA
2	1508	SUBTERRANEAN BASEMENT UNFINISHED AREA
	3016	

ROOMS

Building	Rooms	Bedrooms	Full Bath	3/4 Bath	Half Bath
2	6	3	1		

TAXING DISTRICTS

UNINCORP CTY PLACE HOLDER DISTRICT

UNINCORP CTY PLACE HOLDER DISTRICT

COUNTY

BOULDER COUNTY GENERAL OPERATING
BOULDER COUNTY GENERAL OPERATING
BOULDER COUNTY ROAD & BRIDGE
BOULDER COUNTY ROAD & BRIDGE
BOULDER COUNTY PUBLIC WELFARE FUND
BOULDER COUNTY PUBLIC WELFARE FUND
BOULDER COUNTY PUBLIC WORKS
BOULDER COUNTY PUBLIC WORKS
BOULDER COUNTY RETIREMENT FUND
BOULDER COUNTY RETIREMENT FUND
BOULDER COUNTY SOLID WASTE FUND
BOULDER COUNTY SOLID WASTE FUND
BOULDER COUNTY DEVEL DISABILITY FUND
BOULDER COUNTY DEVEL DISABILITY FUND
BOULDER COUNTY SELF INSURANCE FUND
BOULDER COUNTY SELF INSURANCE FUND
BOULDER COUNTY CAPITAL EXPEND FUND
BOULDER COUNTY CAPITAL EXPEND FUND
BOULDER COUNTY JUDGMENT LEVY FUND
BOULDER COUNTY JUDGMENT LEVY FUND
BOULOER COUNTY REFUND ABATEMENT
BOULDER COUNTY REFUND ABATEMENT
BOULDER COUNTY CONTINGENCY FUND
BOULDER COUNTY CONTINGENCY FUND
BOULDER COUNTY HEALTH & HUMAN SERVICES
BOULDER COUNTY HEALTH & HUMAN SERVICES
BOULDER CO TEMP HS SAFETY NET FUND

SCHOOL DISTRICT

ST VRAIN RE IJ GENERAL OPERATING
ST VRAIN RE IJ GENERAL OPERATING
ST VRAIN RE IJ BOND REDEMPTION
ST VRAIN RE IJ BOND REDEMPTION
ST VRAIN RE IJ CONTRACT OBLIGATION
ST VRAIN RE IJ CONTRACT OBLIGATION
ST VRAIN RE IJ OVERRIDES
ST VRAIN RE IJ OVERRIDES
ST VRAIN RE- IJ TRANSPORTATION
ST VRAIN RE- IJ TRANSPORTATION
ST VRAIN RE IJ ABATEMENT REFUNDS
ST VRAIN RE IJ ABATEMENT REFUNDS

WATER DISTRICT

NORTHERN COLO WATER CONTRACT OBLIG
NORTHERN COLO WATER CONTRACT OBLIG
ST VRAIN LEFT HAND WATER GENERAL OPER
ST VRAIN LEFT HAND WATER GENERAL OPER
ST VRAIN LEFT HAND WATER ABATE REFUND
ST VRAIN LEFT HAND WATER ABATE REFUND

FIRE PROTECTION DISTRICT

HYGIENE FIRE DIST GENERAL OPERATING
HYGIENE FIRE DIST GENERAL OPERATING
HYGIENE FIRE DIST BOND
HYGIENE FIRE DIST BOND
HYGIENE FIRE DIST PENSION
HYGIENE FIRE DIST PENSION
HYGIENE FIRE DIST ABATEMENT REFUND
HYGIENE FIRE DIST ABATEMENT REFUND

SOIL CONSERVATION DISTRICT

LONGMONT CONSERVATION DIST GEN OPER
LONGMONT CONSERVATION DIST GEN OPER

OTHER

RTD GENERAL OPERATING
RTD GENERAL OPERATING

Report Date: 1/5/2012 8:05:13 AM

LU_Plan9Report_LU_v2-4

Boulder County Building Division Permit Routing Form

Intake Stamp	Permit # Sticker:
RECEIVED JAN – 4 2012 BOULDER COUNTY BUILDING DIVISION	BP-12-0016
	Permit Tech: KA
	Plan's Exam: JR
	CSFS: ☐ Yes ☐ No

Owner's Name:	Project Description:
Cemex	Fiber Optic conduit to existing equipment structure. Replace 12 Antennas ~~Add 6 Antennas~~

Paid Fees:

Application Deposit:	$ 25.00 PK	Subtotal:	$ 505.49
Building Division Fees:	$	Less Deposit:	$ 25
Investigation Fee:	$	**Balance Due:**	$ 480.49
Access Fee:	$		
Escrow:	$		
Floodplain Fee:	$		

transfer OK

contractor Fabian 720-690-3179

Permit Tech Comments:

Comments: utilitys in RR right of way?

Zoning Approval:

☐ SPR Required ☐ Zoning Affidavit ☐ Height Survey Required ☐ Setback Survey Required
☐ TDC's Required ☐ Exterior Lighting Plan ☐ Exterior Light Cut Sheets ☐ Landscape Plan
☐ ARC Approval Letter

Comments:	Approved by:	Date:
SPR-97-160 10/24/11 - Minor modification	HJH	1/6/12

Historic Approval:

Comments:	Approved by:	Date:

Site Plan Review: CP

Site Plan Review #:	Notified Owner/Date:	Notified Contractor/Date:	
Comments:		Approved by: hannah	Date: 1/6/12

Wildfire:

Comments:	Approved by:	Date:

Transportation Approval:

Access Permit #:	☐ Road Maintenance Waiver Required	☐ Inspection Required Prior to CO	
Comments:		Approved by:	Date:

Floodplain:

Floodplain Permit #:	Approved by:	Date:
Comments:		

Plan Check:

Soils Report Info: ☐ Caissons ☐ Spread Footings ☐ Perimeter Drain ☐ Fire Dept. ☐ Public Health - Comm. Kitchen

Comments:	Voids:	Floating Slabs:
	Reviewed by: MBP	Date: 1.18.12

Chief Building Official:

OK

☐ Zoning ☐ TDC Certificate ☐ SPR ☐ WFM
☐ Transportation ☐ Floodplain ☒ Contractor License ☐ Recycle Checklist
☐ Well/Water ☐ Septic/Sanitation ☐ Access Permit ☐ Road Maintenance Waiver

Comments:	Approved by:	Date:
		1/19/12

Notification:

Notified Owner:	Date:	Notified Contractor:	Date:		
		Rooke	1/19/12	☐ Left Voicemail	☐ Mailed Permit

BP-12-0016

Land Use

Courthouse Annex • 2045 13th Street • Boulder, Colorado 80302 • Tel: 303.441.3930 • Fax: 303.441.4856
Mailing Address: P.O. Box 471 • Boulder, Colorado 80306 • www.bouldercounty.org

October 24, 2011

BP-12-0016 includes also replacing 12 existing 6' whip antennas with 6' whip antennas

Dave Closser
Closser Consulting LLC
4628 Gordon Dr.
Boulder, CO 80305

Re: SPR-97-160 Modification Request

Dear Dave,

Land Usc staff has reviewed your request to modify the approval of SPR-97-160. Staff understands that the proposed upgrade involves bringing fiber phone service to the equipment shelter at the base of the silos. This fiber will replace the existing copper phone service to the site and will be located underground. Additionally an antenna upgrade is proposed. Currently, there are 3 identical sets of Verizon Wireless antennas at the site. Two sets are up high on the silos, one facing west the other facing north. The third set is on a lower attached building facing east. At this time, Verizon Wireless would like to add 2 new antennas to each existing set of 4. The two new antennas will provide coverage for LTE/4G. Some coaxial cable will also be run between the equipment shelter on the ground and the new antennas.

The Verizon facilities were approved through SPR-97-160 and constructed per BP-97-1785. SPR-97-160 approved the location of three arrays of four antennas (two arrays on the silos and one array on the roof of the upper pack house). In addition, a 6' diameter dish antenna was approved to be located on the roof of the upper pack house and an (12'x 20') equipment shelter to be located on the ground immediately adjacent to the north wall of the pack house. Staff has determined that due to the highly industrial nature of this site and its relative isolation the land use impacts of the additional antenna are insubstantial and with the conditions listed below the proposed modification can be considered minor.

It is unclear to staff why these facilities were permitted though the site plan review process rather than the special use process as is required by the Land Use Code for Telecommunications Facility exceeding the height of the zone district limits. Further changes to this facility may not be considered minor and at such time a special use approval shall be required.

The following conditions shall apply to this minor modification approval:

1. Any vegetated areas disturbed during the upgrade construction shall be revegetated.
2. All antenna support strucmres and wiring shall be mounted as flush to the silo wall as possible and shall be painted to match the existing structure.
3. A building permit for the project shall be obtained and completed.
4. Documentation of the property owner's approval of this modification shall be provided prior to the issuance of a building permit.

If I may be of further assistance, please call me at 720-494-2641.

Regards,

Hannab L. Hippely, Senior Plaimer

Cindy Domenico *County Commissioner* Ben Pearlman *County Commissioner* Will Toor *County Commissioner*

In a message dated 12/14/2011 7:48:59 A.M. Mountain Standard Time, rd.smith@cemex.com writes:

I have It in hand, it will go in the mall today. He signed along the left margin of the first page along with his title and the date. This OK?

RECEIVED
JAN 05 2011
BOULDER COUNTY
BUILDING DIV.

From: DCLOSSER@aol.com
To: Royce D Smith/US/Cemex@CEMEX
Date: 12/14/2011 07:42 AM
Subject: Re: Verizon Wireless Locates

RD, that's great news! I'll check In tomorrow if I don't hear from you.

Dave

Dave Closser
Closser Consulting LLC
4628 Gordon Dr.
Boulder, CO 80305
303-554-5627 office
303-859-1080 mobile

In a message dated 12/14/2011 7:39:34 A.M. Mountain Standard Time, rd.smlth@cemex.com writes:
Dave:

I sent it to Houston with the electronic version of the drawings all of our emails, and received an email yesterday giving us the OK. It is now sitting on the Plant Manager's desk for signature. I will follow this up later today.

RD

Mountain wireless BP-12-0016

927 SALIDA WAY AURORA Colo 80011

303-343-6544

BP-12-0016

5134 Ute HWY LYONS Co

RECEIVED
JUN 20 2013
BOULDER COUNTY
BUILDING DIVISION


Structural Calculations

by

Otegui Structural Services, LLC

DEN Lyons
5134 Ute Highway
Longmont, CO 80503

211078
11/3/11

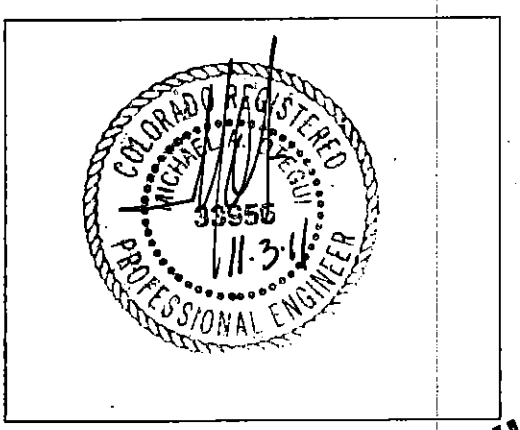

REVIEWED
JAN 18 2012
BOULDER COUNTY
BUILDING DIVISION


Wind Speed = 130mph

<u>New Antennas on Ballast Frame</u>

Existing are (4) 1'x4' antennas

New = (6) 1'x4' antennas

Elevation of antennas = 77'

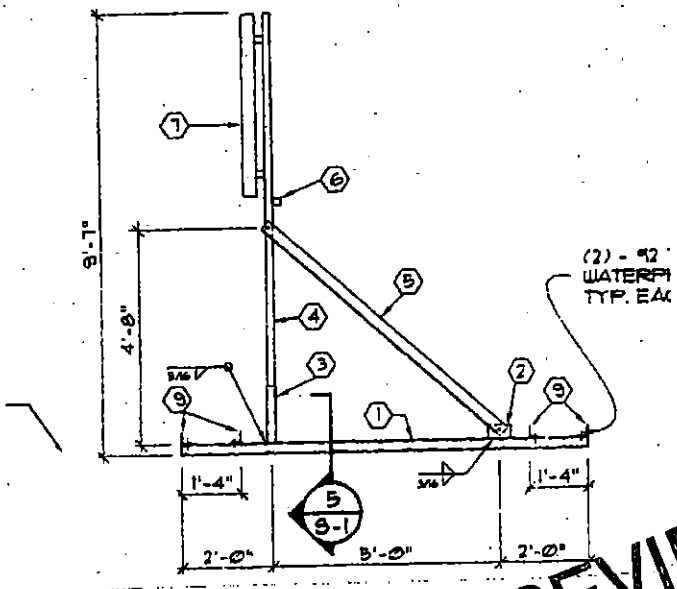

REVIEWED
JAN 18 2012
BOULDER COUNTY
BUILDING DIVISION

Components and cladding wind load = 49psf

Wind load = (49psf)(6)(1')(4') = 1176#

OTM = (1176)(6.67')= 7,843#-ft

Weight for hold down = 7,843#-ft/(7ft) = 1120# each end

or 87#/ft .....Note this is 2,240#

HANSEN BROS. PRINTING • LITTLETON, COLO. • 303-794-0544

6.5.15, Design Wind Load on Others Structures

$F = q_z G C_f A_f$ (6-27)

$q_z = .00256 K_z K_{zt} K_d V^2 I$ (6-15)

Ht z at the centroid of area Af =	77	ft	Exp = C
Exposure coefficient K_z =	1.20		6.5.6.6, T-6-3 for MWFR
Topography factor K_{zt} =	1.00		6.5.7.2
Directionality factor K_d =	0.85		Table 6-4
Wind Speed V =	130	mph	
Importance factor I_w =	1.00		Table 6-1
q_z =	44.13	psf	
Gust Effect factor G =	0.85		6.5.8
Force coeff C_f =	1.3		Figure 6-21 through 6-23
Design wind pressure, F/A_f =	46.76	psf	

WIND LOAD FOR ANTENNA USED.

REVIEWED
JAN 18 2012
BOULDER COUNTY
BUILDING DIVISION

Existing Roof

Existing roof is 28' span with (minimum) 24" double T.

Capacity of 24" 2T at 32' is 186psf

New Load = 2240#/(9')(12') = 20 psf ok

Existing roof OK by observation

REVIEWED
JAN 18 2012
BOULDER COUNTY
BUILDING DIVISION

HANSEN BROS. PRINTING • LITTLETON, COLO. • 303-794-0544

OTEGUI STRUCTURAL SERVICES, LLC

PROJECT DEN LYONS PROJECT NO. 211078
SUBJECT PIPE ANCHOR (EXIST) DATE 11.3.11 BY MO
CLIENT CSA; SHEET 4 OF 5

Wind Load for Existing Pipe Anchors

Antenna weight = (6)(20#) = 120#

Pipe Wt = (12')(7.8#/ft)(2) = 187#

Total = 307# say 350#

Wind load at 145' = 56 psf

Total load = (56psf)(1')(4')(6) = 1344#

There are (3) anchors so 1344#/3 = 448# tension

350#/3 = 116# Shear (at each connection point)

For ½" diameter x 2-1/4" embed HILTY KWIK BOLT III SS anchor allowable capacity:

1015# Tension

1875# Shear

For 4" spacing, reduction factors are:

Tension = 0.67(1015) = 680#

Shear = 0.92(1875) = 1725#

Use (4) anchor connection, Combined loading check =

(448#/4)/680# + (116#/4)/1725# = 0.18 < 1.0 OK

Therefore existing anchorage to Silo Face is OK for new loads

REVIEWED
JAN 18 2012
BOULDER COUNTY
BUILDING DIVISION

6.5.15, Design Wind Load on Others Structures

$F = q_z G C_f A_f$			(6-27)
$q_z = .00256 K_z K_{zt} K_d V^2 I$			(6-15)
Ht z at the centroid of area Af =	145	ft	Exp = C
Exposure coefficient K_z =	1.37		6.5.6.6, T-6-3 for MWFR
Topography factor K_{zt} =	1.00		6.5.7.2
Directionality factor K_d =	0.85		Table 6-4
Wind Speed V =	130	mph	
Importance factor I_w =	1.00		Table 6-1
q_z =	50.38	psf	
Gust Effect factor G =	0.85		6.5.8
Force coeff C_f =	1.3		Figure 6-21 through 6-23
Design wind pressure, F/A_f =	55.67	psf	

WIND @ ANCHORED ANTENNAS

REVIEWED
JAN 18 2012
BOULDER COUNTY
BUILDING DIVISION

BP72-0016

verizon wireless

PROJECT: DS3 - LTE
SITE NAME: DEN LYONS
SITE I.D. #: 215
ADDRESS: 5134 UTE HIGHWAY
LONGMONT, CO 80503

DRAWING SYMBOL LEGEND

- SECTION CUT
- INTERIOR ELEVATION FLAG
- EXTERIOR ELEVATION FLAG
- DETAIL OR PLAN ENLARGEMENT
- REVISION
- SPOT ELEVATION
- GRID REFERENCE
- ELECTRICAL
- TELCO
- ELEC & TELCO
- COAXIAL CABLE
- GAS LINE
- WATER LINE
- SEWER LINE
- SANITARY SEWER
- FIBER OPTIC CABLE
- UNDERGROUND UTILITIES
- CHAIN LINK FENCE
- WOODEN FENCE
- LEASE AREA/ PROPERTY BOUNDARY
- RAILROAD TRACKS
- STEEL WALL
- BATT INSULATION
- EXISTING TOPOGRAPHY
- PROPOSED TOPOGRAPHY
- WATER DRAINAGE FLOW

GENERAL NOTES

1. DRAWINGS ARE NOT TO BE SCALED. WRITTEN DIMENSIONS TAKE PRECEDENCE, AND THIS SET OF PLANS IS INTENDED TO BE USED FOR DIAGRAMATIC PURPOSES ONLY, UNLESS NOTED OTHERWISE. THE GENERAL CONTRACTOR'S SCOPE OF WORK SHALL INCLUDE FURNISHING ALL MATERIALS, EQUIPMENT, LABOR, AND ANYTHING ELSE DEEMED NECESSARY TO COMPLETE INSTALLATIONS AS DESCRIBED HEREIN.

2. PRIOR TO THE SUBMISSION OF BIDS, ALL CONTRACTORS INVOLVED SHALL VISIT THE JOB SITE AND THOROUGHLY FAMILIARIZE WITH ALL CONDITIONS AFFECTING THE PROPOSED PROJECT, WITH THE CONSTRUCTION AND CONTRACT DOCUMENTS, FIELD CONDITIONS AND CONFIRM THAT THE PROJECT MAY BE ACCOMPLISHED AS SHOWN. PRIOR TO PROCEEDING WITH CONSTRUCTION, ANY FINDINGS, OMISSIONS, OR DISCREPANCIES ARE TO BE BROUGHT TO THE ATTENTION OF THE ARCHITECT/ENGINEER IN WRITING.

3. THE GENERAL CONTRACTOR SHALL RECEIVE WRITTEN AUTHORIZATION TO PROCEED WITH CONSTRUCTION PRIOR TO STARTING WORK ON ANY ITEM NOT CLEARLY DEFINED BY THE CONSTRUCTION DRAWINGS/CONTRACT DOCUMENTS.

4. THE CONTRACTOR SHALL SUPERVISE AND DIRECT THE PROJECT DESCRIBED HEREIN. THE CONTRACTOR SHALL BE SOLELY RESPONSIBLE FOR ALL CONSTRUCTION MEANS, METHODS, TECHNIQUES, SEQUENCES AND PROCEDURES AND FOR COORDINATING ALL PORTIONS OF THE WORK UNDER THE CONTRACT.

5. THE CONTRACTOR SHALL INSTALL ALL EQUIPMENT AND MATERIALS ACCORDING TO MANUFACTURER'S/ VENDOR'S SPECIFICATIONS UNLESS NOTED OTHERWISE OR WHERE LOCAL CODES OR ORDINANCES TAKE PRECEDENCE.

6. ALL WORK PERFORMED ON PROJECT AND MATERIALS INSTALLED SHALL BE IN STRICT ACCORDANCE WITH ALL APPLICABLE CODES, REGULATIONS, AND ORDINANCES. CONTRACTOR SHALL GIVE ALL NOTICES AND COMPLY WITH ALL LAWS, ORDINANCES, RULES, REGULATIONS AND LAWFUL ORDERS OF ANY PUBLIC AUTHORITY, MUNICIPAL AND UTILITY COMPANY SPECIFICATIONS, AND LOCAL AND STATE JURISDICTIONAL CODES BEARING ON THE PERFORMANCE OF THE WORK.

7. THE STRUCTURAL COMPONENTS OF THIS PROJECT SITE/FACILITY ARE NOT TO BE ALTERED BY THIS CONSTRUCTION PROJECT UNLESS NOTED OTHERWISE.

8. ANTENNA SUPPORTING STRUCTURE IS UNDER A SEPARATE CONTRACT. THE CONTRACTOR SHALL ASSIST ANTENNA INSTALLATION SUBCONTRACTOR IN TERMS OF COORDINATION AND SITE ACCESS. ERECTION SUBCONTRACTOR SHALL BE RESPONSIBLE FOR PROTECTION OF PERSONNEL AND PROPERTY FROM HAZARDOUS EXPOSURE TO GRounded Energies.

9. GENERAL CONTRACTOR SHALL PROVIDE AT THE PROJECT SITE A FULL SET OF CONSTRUCTION DOCUMENTS UPDATED WITH THE LATEST REVISIONS AND ADDENDA OR CLARIFICATIONS FOR THE USE OF ALL PERSONNEL ENGAGED WITH THE PROJECT.

10. DETAILS INCLUDED HEREIN ARE INTENDED TO SHOW END RESULT OF DESIGN. MINOR MODIFICATIONS MAY BE REQUIRED TO MEET JOB CONDITIONS OR SITUATIONS, AND SUCH MODIFICATIONS SHALL BE INCLUDED AS PART OF THE SCOPE OF WORK.

11. THE FACILITY IS CELLULAR RADIO EQUIPMENT AND ANTENNAS.

12. THE CONTRACTOR SHALL MAKE NECESSARY PROVISIONS TO PROTECT EXISTING IMPROVEMENTS, EASEMENTS, PARKING, BUILDINGS, ETC. DURING CONSTRUCTION UPON COMPLETION OF WORK, CONTRACTOR SHALL REPAIR ANY DAMAGE THAT MAY HAVE OCCURRED DUE TO CONSTRUCTION ON OR ABOUT THE PROPERTY.

13. CONTRACTOR SHALL ENSURE THE GENERAL WORK AREA IS KEPT CLEAN AND HAZARD FREE DURING CONSTRUCTION AND DISPOSE OF ALL DIRT, DEBRIS, RUBBISH AND REMOVE EQUIPMENT NOT SPECIFIED AS REMAINING ON THE PROPERTY. PREMISES SHALL BE LEFT IN CLEAN CONDITION AND FREE FROM PAINT SPOTS, DUST, OR SMUDGES OF ANY NATURE.

14. THE ARCHITECTS/ENGINEERS HAVE MADE EVERY EFFORT TO SET FORTH IN THE CONSTRUCTION AND CONTRACT DOCUMENTS THE COMPLETE SCOPE OF WORK. CONTRACTORS BIDDING THE JOB ARE HEREBY CLOSE CAUTIONED THAT MINOR OMISSIONS OR ERRORS IN THE DRAWINGS AND OR SPECIFICATIONS SHALL NOT EXCUSE SAID CONTRACTOR FROM COMPLETING THE PROJECT AND IMPROVEMENTS IN ACCORDANCE WITH THE INTENT OF THESE DOCUMENTS. THE BIDDER SHALL BEAR THE RESPONSIBILITY OF NOTIFYING (IN WRITING) THE ARCHITECT/ENGINEER OF ANY CONFLICTS, ERRORS, OR OMISSIONS PRIOR TO THE SUBMISSION OF CONTRACTOR'S PROPOSAL. IN THE EVENT OF DISCREPANCIES THE CONTRACTOR SHALL PRICE THE MORE COSTLY OR EXTENSIVE WORK, UNLESS DIRECTED OTHERWISE.

15. SPECIAL INSPECTION TESTING REQUIRED (SPECIAL INSPECTIONS SHALL BE PERFORMED BY AN INDEPENDENT SPECIAL INSPECTOR PER SECTION 1701 OF THE UNIFORM BUILDING CODE (UBC) FOR THE FOLLOWING:

A. CONCRETE: DURING THE TAKING OF CONCRETE TEST SPECIMENS AND PLACING STRUCTURAL REINFORCING AND STRUCTURAL CONCRETE, VISUALLY REINFORCING SIZE, PLACEMENT AND GRADE.

B. BOLTS, AND ANCHORS IN CONCRETE HOLD-BORN ANCHOR BOLTS, INSPECT SIZE, LENGTH, TYPE (EXPANSION, EPOXY) AND SPACING.

PROJECT TEAM

CLIENT
VERIZON WIRELESS
CONSTRUCTION MANAGER
LARRY EDMISTEN
3131 S. VAUGHN WAY
SUITE 550
AURORA, CO 80014
PHONE: 720.733.4561

CLIENT
VERIZON WIRELESS
CONSTRUCTION MANAGER
CHAD REECE
3131 S. VAUGHN WAY
SUITE 550
AURORA, CO 80014
PHONE: 303.873.3873

SITE ACQUISITION/ZONING
DANE CLOSSER
CLOSSER CONSULTING LLC
4626 CORONA ST.
DENVER, CO 80216
PHONE: 303.564.5827
MOBILE: 303.880.1080
FAX: 303.564.2002

ARCHITECT(S)
CHARLES F. SITZLER
CSAI
8618 S. SANTA FE DR.
UNIT 350
LITTLETON, CO 80127
PHONE: 303.932.9074
FAX: 303.932.8161

RF ENGINEER
VERIZON WIRELESS
DAVID BOSH
MANAGER RF ENGINEER
3131 S. VAUGHN WAY
SUITE 550 AURORA, CO
80014 PHONE:
303.605.6747

LEAD
BARTON GARNER
CHRIST
LONGMONT, CO
PHONE: 303.256.8122

PROJECT DATA

JURISDICTION	–	BOULDER COUNTY
ZONING DESIGNATION	–	E1
OCCUPANCY GROUP(S)	–	U
CONSTRUCTION TYPE	–	V-B
FULLY SPRINKLERED:	–	N/A
NO. OF STORIES	–	N/A

GOVERNING CODES:
2003 IBC, 2003 UBC, 2003 IFC, 2003 IECC 2003 NEC

ADA COMPLIANCE:
THIS FACILITY IS UNMANNED AND NOT FOR HUMAN HABITATION.

PROJECT DESCRIPTION

SITE AUDIT FOR FUTURE INSTALLATION. REMOVE & REPLACE ANTENNAS. ADD 6 ANTENNAS AND NEW EQUIP.

GENERAL CONTRACTOR NOTE

CONTRACTOR SHALL VERIFY ALL PLANS AND EXISTING DIMENSIONS AND CONDITIONS ON THE JOB SITE AND SHALL IMMEDIATELY NOTIFY THE ARCHITECT IN WRITING OF ANY DISCREPANCIES BEFORE PROCEEDING WITH THE WORK OR BE RESPONSIBLE FOR SAME.

THESE DRAWINGS ARE ONLY TO SCALE WHEN PLOTTED ON 24x36 SHEET. USE GRAPHIC SCALE WHEN PLOTTED ON 11x17 SHEET.

CALL BEFORE YOU DIG – COLORADO LAW REQUIRES 3 WORKING DAYS NOTICE FOR CONSTRUCTION STAKE.
UTILITY NOTIFICATION CENTER OF COLORADO – 1-800-922-1987


THESE DRAWINGS MAY NOT SHOW ALL UNDERGROUND PIPING AND UTILITIES. THE CONTRACTOR SHALL EXERCISE EXTREME CARE DURING ALL EXCAVATION AND OTHER CONSTRUCTION ACTIVITIES.

CONTRACTOR IS RESPONSIBLE FOR ALL UTILITY LOCATES AND UTILITY RELOCATIONS REQUIRED FOR THIS INSTALLATION. CONTRACTOR SHALL RE-SCHEDULE AND COORDINATE ALL WORK WITH THE OWNER TO ENSURE NO DISRUPTION TO OWNERS OPERATIONS.

DRAWING INDEX

SHEET	DESCRIPTION
T1.0	TITLE SHEET
A1.0	SITE PLAN
A1.1	ENLARGED SITE PLAN
A2.0	EQUIPMENT ROOM PLAN
A2.1	EQUIPMENT DETAILS
A2.2	ANTENNA PLAN & RF DATA
A3.0	ELEVATION
A3.1	ELEVATION
A4.0	DETAILS

VICINITY MAP

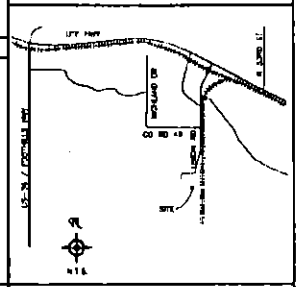

DIRECTIONS TO SITE

HEAD WEST ON S. VAUGHN WAY TOWARD UTE HWY. TURN LEFT ONTO THE COLORADO ALT HWY TO I-25 (METRIC PARK) 3 MINUTES ROAD. TAKE THE I-25 N RAMP. KEEP RIGHT AT FORK, FOLLOW SIGNS FOR I-25 N AND MERGE ONTO I-25 N. TAKE EXIT 12A ON THE LEFT TO MERGE ONTO I-70 W TOWARD DENVER. SLIGHT RIGHT ONTO I-270 W (SIGNS FOR FORT COLLINS) CONTINUE ONTO I-76 W. TURN RIGHT ONTO US-85/ALT HWY. DESTINATION WILL BE ON THE RIGHT.

APPROVAL BLOCK

TITLE	SIGNATURE	DATE
OWNER		
ENGINEER		
CONSTRUCTION MGR		
PROJECT MANAGER		

APPROVAL SIGNATURE OR "SIGN-OFF" BY PARTIES TO THE CONSTRUCTION DRAWINGS DOES NOT CONSTITUTE ALTERATION OF THE LEASE TERMS.

verizon wireless

DEN LYONS
SITE NO.
215
NORTHBROOK CEMENT PLANT
5134 UTE HIGHWAY
LONGMONT, CO 80503

REV.	DATE	DESCRIPTION	BY
1			
2			
3			
4			
5			

CSAi


DRAWN BY | CHK | APV

SHEET TITLE

TITLE SHEET

SHEET NUMBER

T1.0

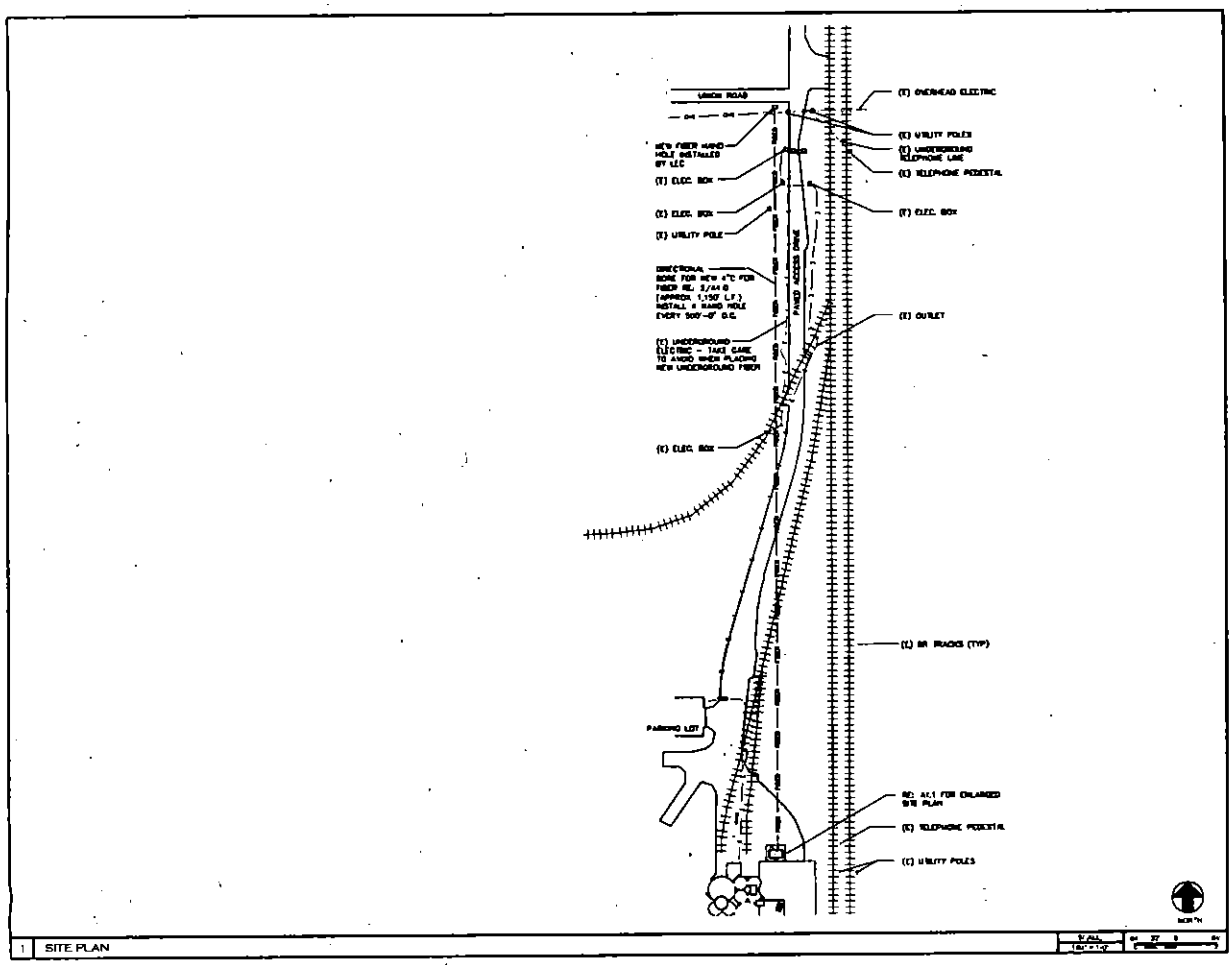

1 SITE PLAN

verizon wireless

DEN LYONS

215

SOUTHDOWN CEMENT PLANT

5194 LITTLETON-EATON


LONGMONT CO 80503

CSAi

SITE PLAN

A1.0

BP-12-0016

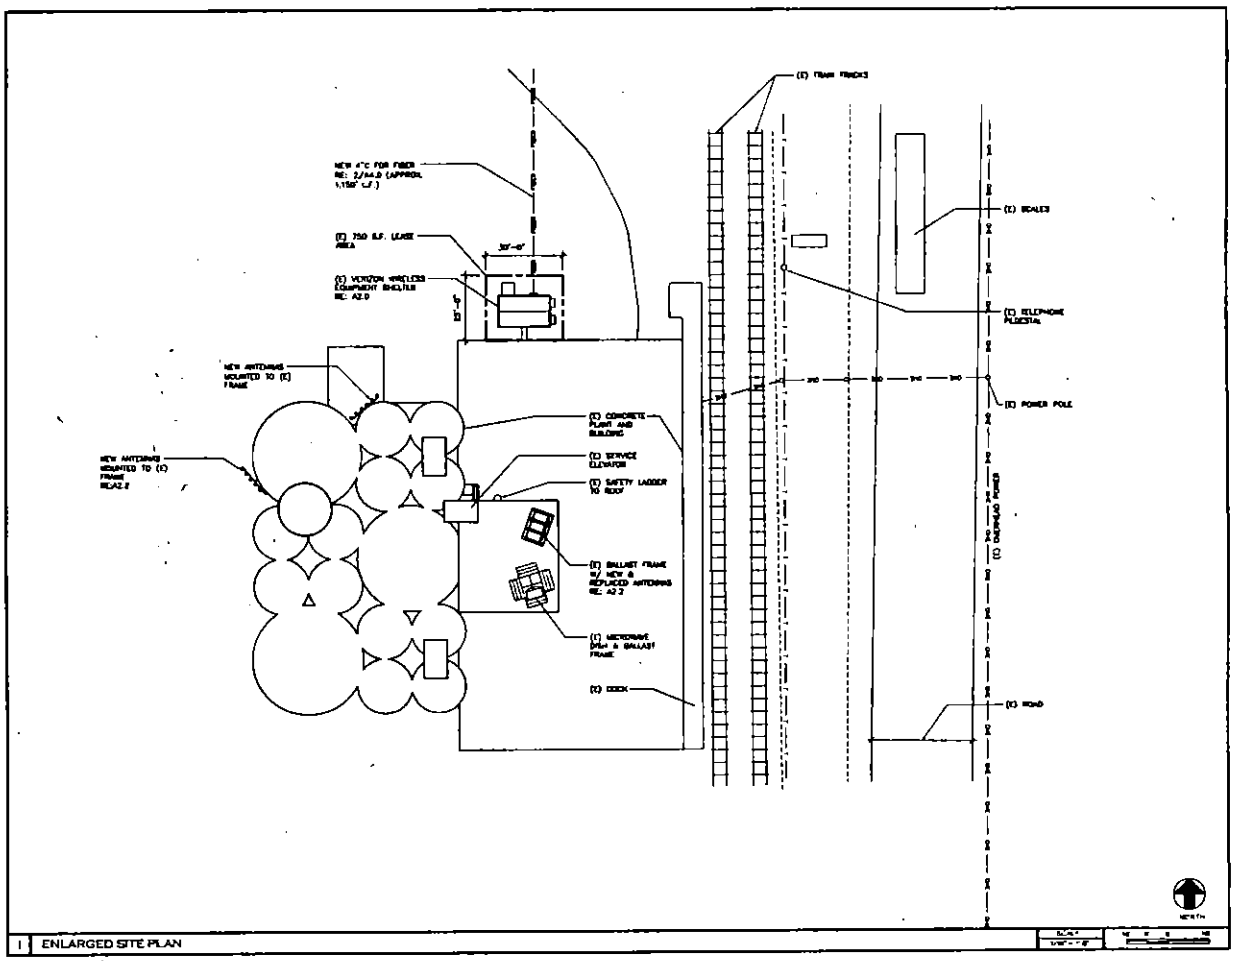

1 ENLARGED SITE PLAN


verizon wireless

DEN LYONS
SITE
215


CSAi

ENLARGED SITE PLAN

A1.1

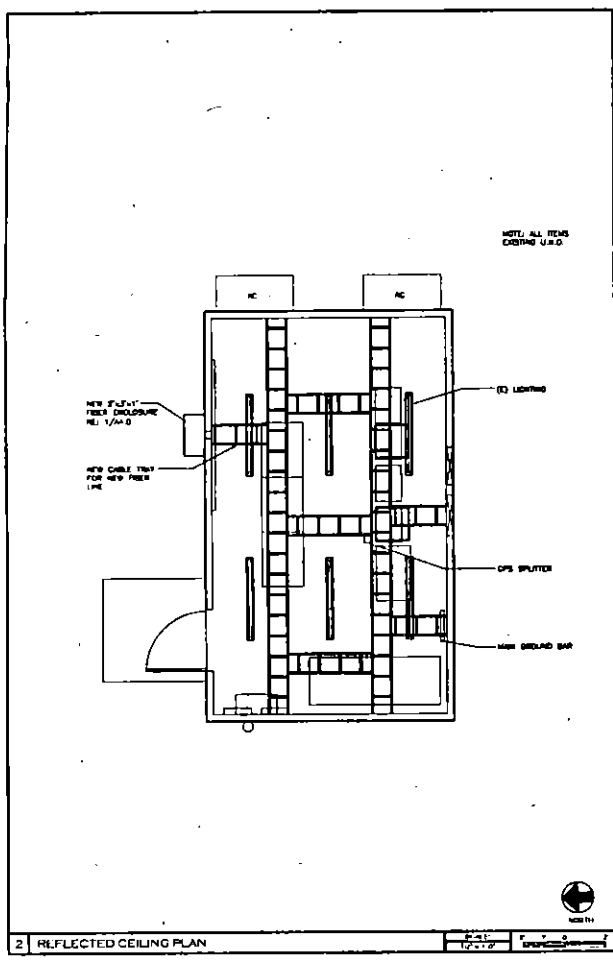

2 REFLECTED CEILING PLAN

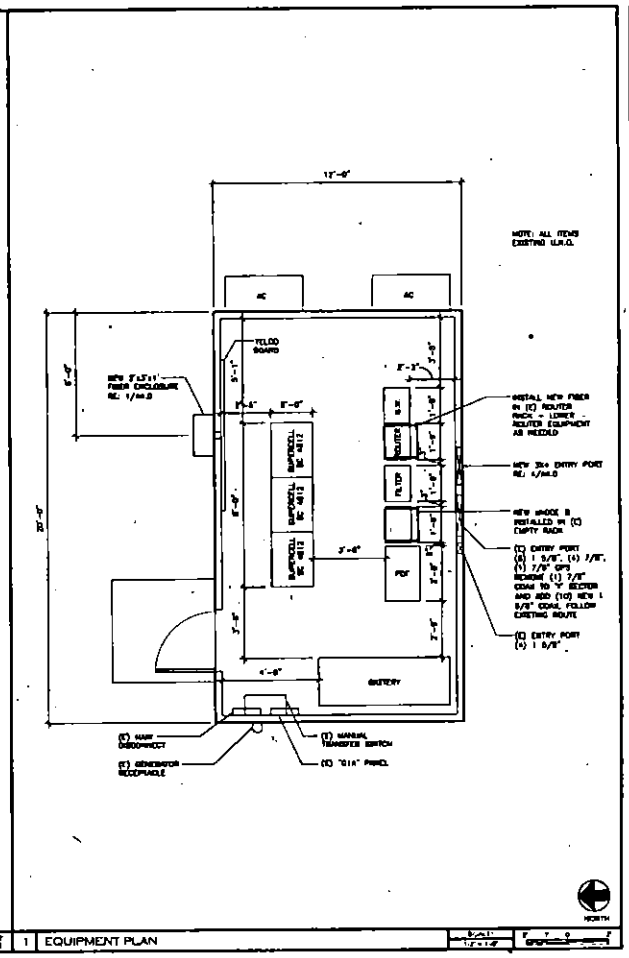

1 EQUIPMENT PLAN

verizon wireless

DEN LYONS
SITE
215
SOUTHDOWN CEMENT PLANT
5134 UTE HIGHWAY
LONGMONT, CO 80503


PLANS PREPARED BY

CSAi


EQUIPMENT PLANS

A2.0


BP-12-0016

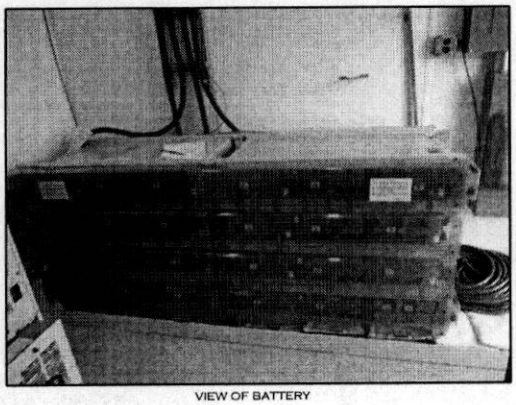

VIEW OF BATTERY

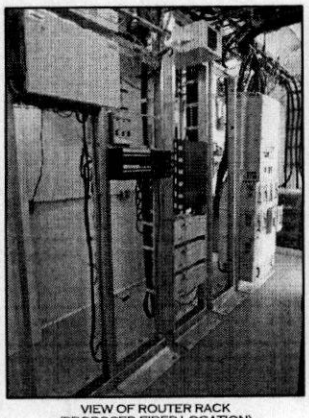

VIEW OF ROUTER RACK
(PROPOSED FIBER LOCATION)

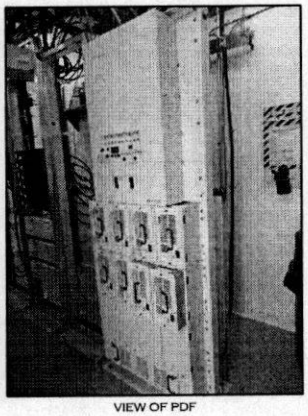

VIEW OF PDF


2 EQUIPMENT ROOM PHOTOGRAPHS


PDF RACK

LORAIN POWER SYSTEM
(6) 24 VDC RECTIFIERS IN USE
(2) SPARE

BATTERY RACK

ABSOLYTE 100A 33
1600AH
(24) BATTERIES

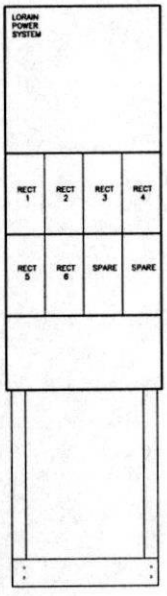

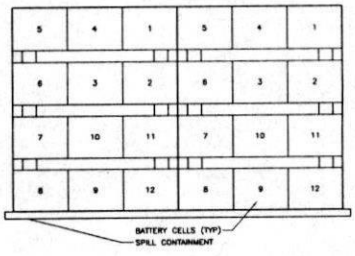

1 RACK ELEVATIONS

verizon wireless
VERIZON WIRELESS SERVICES
3131 S. VAUGHN WAY, SUITE 550
AURORA, CO 80014
PHONE: 303.873.2800

PROJECT INFORMATION:

SITE NAME
DEN LYONS
SITE I.D.
215
SOUTHDOWN CEMENT PLANT
5134 UTE HIGHWAY
LONGMONT, CO 80503

REV.	DATE	DESCRIPTION	BY
A	05/03/11	CD REVIEW	SM
B	05/19/11	CLIENT COMMENTS	JTT
C	11/03/11	CLIENT COMMENTS	JTT
D	11/21/11	CLIENT COMMENTS	TN

PLANS PREPARED BY:

CSAi
CHARLES STRICKLY ARCHITECTURE, Inc.
ARCHITECTURE – PLANNING – DESIGN
3635 SOUTH ZANG STREET, SUITE 280
LITTLETON, COLORADO 80127
OFFICE: 303.922.9974
FAX: 303.932.8541

LICENSURE NO:

DRAWN BY:	CHK:	APV:
JTT	TN	CS

CONSULTANT:

SHEET TITLE:
EQUIPMENT DETAILS

SHEET NUMBER:
A2.1

M:\2011\Projects\Verizon LTE\DEN_Lyons\CD\A21.dwg
PLOTTED: Nov 21, 2011 AT 8:54am

NOTES:
CONTRACTOR TO PROVIDE MIN. BALLAST FOR ANTENNA FRAME AS REQ'D PER STRUCTURAL CALCULATIONS BY DITOSA STRUCTURAL SERVICES LLC, DATED 11/03/11.

2 CONTRACTOR TO NOTIFY ARCHITECT/ STRUCTURAL ENGINEER IMMEDIATELY IF CONDITIONS OTHER THAN SHOWN ON PLANS.

NEW & REPLACED ANTENNAS MOUNTED TO (E) BALLAST FRAME - REF. 1/A2.2

(E) NEW UNIVERSAL CROSSOVER PLATE (ET 9/ NEW 3'-6" HORIZONTAL PIPE, BETWEEN THE (E) CENTER MAST PIPES

(E) 2"ø STD CENTER MAST

(E) L 3x3x1/4" SUPPORT ANGLE

(E) 6 NEW SOLID CMU (HALO PER BLOCK) *SEE NOTES ABOVE

(E) 16 12x2 CM ISOLATION PAD

NEW & RELOCATED ANTENNAS MOUNTED TO (E) BALLAST FRAME, SPACE ANTENNAS EVENLY

(E) NEW UNIVERSAL CROSSOVER PLATE (ET 9/ NEW 3'-6" HORIZONTAL PIPE, BETWEEN THE (E) CENTER MAST PIPES

(E) L 3x3x1/4" SUPPORT ANGLE FOR CMU BLOCKS

12'-10" (3) CO. SPACES

4 EXISTING BALLAST FRAME

2 EXISTING ANTENNA CONFIGURATION

1. GENERAL: PROVIDE ALL LABOR, EQUIPMENT AND MATERIALS NECESSARY FOR RECEIVING, INSTALLING, TESTING AND ADJUSTING ANTENNA CABLES FROM THE ANTENNA TO THE CONNECTORS AT THE BASE TRANSMISSION SYSTEM (BTS). THIS SHALL INCLUDE ALL EQUIPMENT SHOWN OR REQUIRED FOR A COMPLETE OPERATING SYSTEM OF ANTENNA, ANTENNA CABLES, CONNECTORS, AND FITTINGS SHALL BE THIRD PARTY FURNISHED COMPONENTS AS SHOWN ON THE BILL OF MATERIALS.

2. MATERIALS
   A. ANTENNA CABLES: AS SCHEDULED
   B. ANTENNA CONNECTORS: AS SCHEDULED
   C. CABLE HANGERS: INSTALLED AT MAXIMUM 4' SPACING
   D. GROUNDING KITS: AS SPECIFIED

3. INSTALLATION
   A. ANTENNA CABLE LENGTHS SHALL BE FIELD MEASURED PRIOR TO PURCHASE OF CABLE. INSTALLER SHALL NOTIFY VZW OF ANY OVERALL LENGTH REQUIRED.
   B. CABLES SHALL BE LABELED IN ACCORDANCE WITH VZW SPECIFICATIONS.
   C. ALL OUTDOR CABLE CONNECTIONS SHALL BE COVERED WITH WEATHERPROOFING TAPE.
   D. THE MINIMUM BENDING RADIUS FOR ALL ANTENNA CABLES SHALL BE AS SHOWN BELOW OR AS PER THE MANUFACTURER, WHICHEVER IS MORE CONSERVATIVE.

CABLE	IN AIR / CABLE TRAY	IN CONDUIT
1/2"	8"	10"
7/8"	10"	15"
1 5/8"	20"	28"

   E. CABLES SHALL BE INSTALLED WITH THE MINIMUM NUMBER OF BENDS. CABLES SHALL NOT BE LEFT UNTERMINATED IN THE FIELD.
   F. GROUNDING KITS - AFTER INSTALLATION OF GROUND STRAPS, THE CONNECTION SHALL BE MADE WEATHER TIGHT USING WEATHERPROOFING KITS AS IDENTIFIED ABOVE. GROUND PIGTAILS SHALL BE BROUGHT OUT IN THE DOWNWARD DIRECTION FROM THE CONNECTIONS TO THE ANTENNA CABLE WITHOUT ANY SHARP BENDS (MINIMUM BEND RADIUS 10") AND CONNECTION SHALL BE MADE TO GROUNDING SYSTEM.

3 ANTENNA NOTES AND REQUIREMENTS

INSTALL (3) 1 5/8" COAX APPROX. 240'-0" LF.

NOTE: REMOVE (1) 7/8" COAX TO 'Y' SECTOR AND ADD (10) MTR 1 5/8" COAX, FOLLOW EXISTING ROUTE STACK WITH EXISTING IN COAX BLOCKS SITE PRO PN# CSB158 OR EQUAL

REFER TO A/A2.2 FOR ACTUAL FRAME

REMOVE (1) 7/8" COAX & INSTALL (4) 1 5/8" COAX APPROX. 150'-0" LF.

INSTALL (3) 1 5/8" COAX APPROX. 300'-0" LF.

NEW CELLULAR AND PCS ANTENNAS ON Z SECTOR, 4TH AND 5TH ANTENNA BEING ADDED ON ALL THREE SECTORS FOR LTE. PCS/ANALOG ANTENNA BEING REPLACED BY PCS ANTENNA ON X AND Y. SPACE ALL ANTENNAS EQUALLY.

1 PROPOSED ANTENNA CONFIGURATION

verizon wireless
8131 E. Via de Ventura Blvd., Suite 100
Scottsdale, AZ 85258
Phone: 303.873.2600

DEN LYONS
SITE ID:
215
SOUTHDOWN CEMENT PLANT
8134 UTE HIGHWAY
LEWISVILLE, CO 80503

REV	DATE	DESCRIPTION	BY
A	03/20/11	60% REVIEW	DTR
B	04/04/11	CLIENT REVIEW	DTR
C	11/03/11	CLIENT COMMENTS	DTR
D	11/03/11	CLIENT SUBMITTAL	DTR

PLANS PREPARED BY
CSAi
CHARLES STICKLE V, ARCHITECTURE, Inc.
ARCHITECTURE - PLANNING - DESIGN
1626 SOUTH 2000 WEST, Suite 200
UPLAND, COLORADO 80537
OFFICE: 303.823.8174
FAX: 303.823.8281

LICENSURE NO.


DRAWN BY	CHK.	APP.
JT	TN	CS

CONSULTANT

SHEET TITLE
ANTENNA PLAN & RF DATA

SHEET NUMBER
A2.2

BP-12-0016

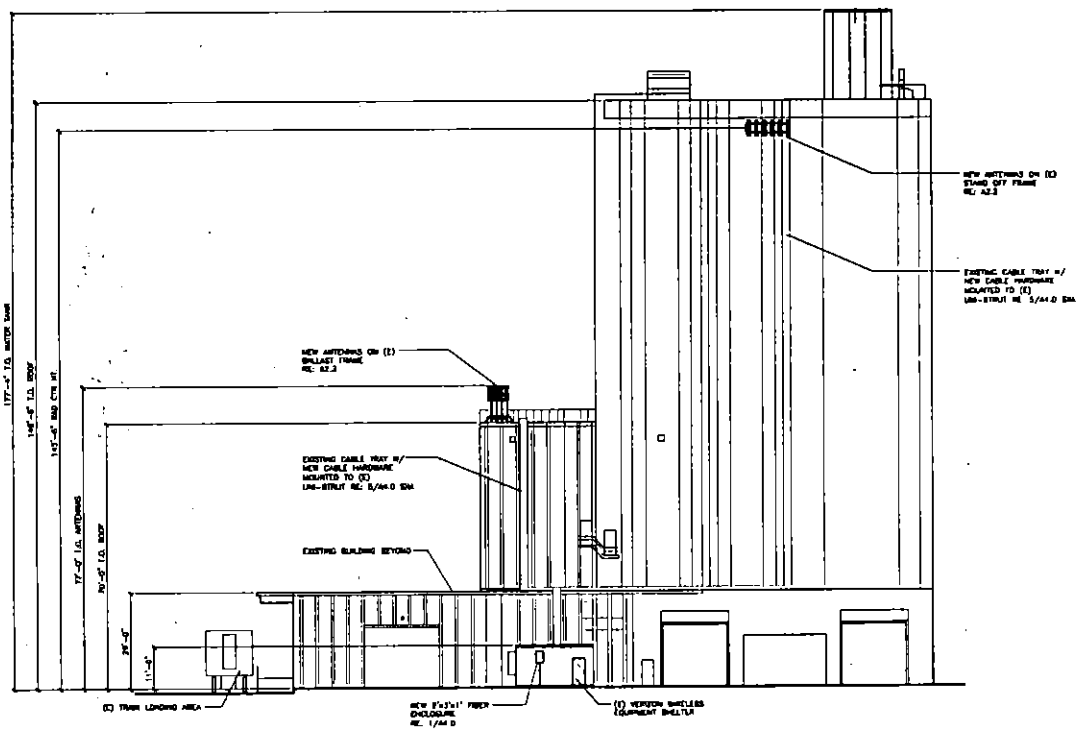

1 NORTH ELEVATION

verizon wireless

DEN LYONS
215


CSAi

Rev	Date	Description	By
A			
B			
C			
D			

Drawn By	Chk	App
JT	TN	CS

ELEVATION

A3.0

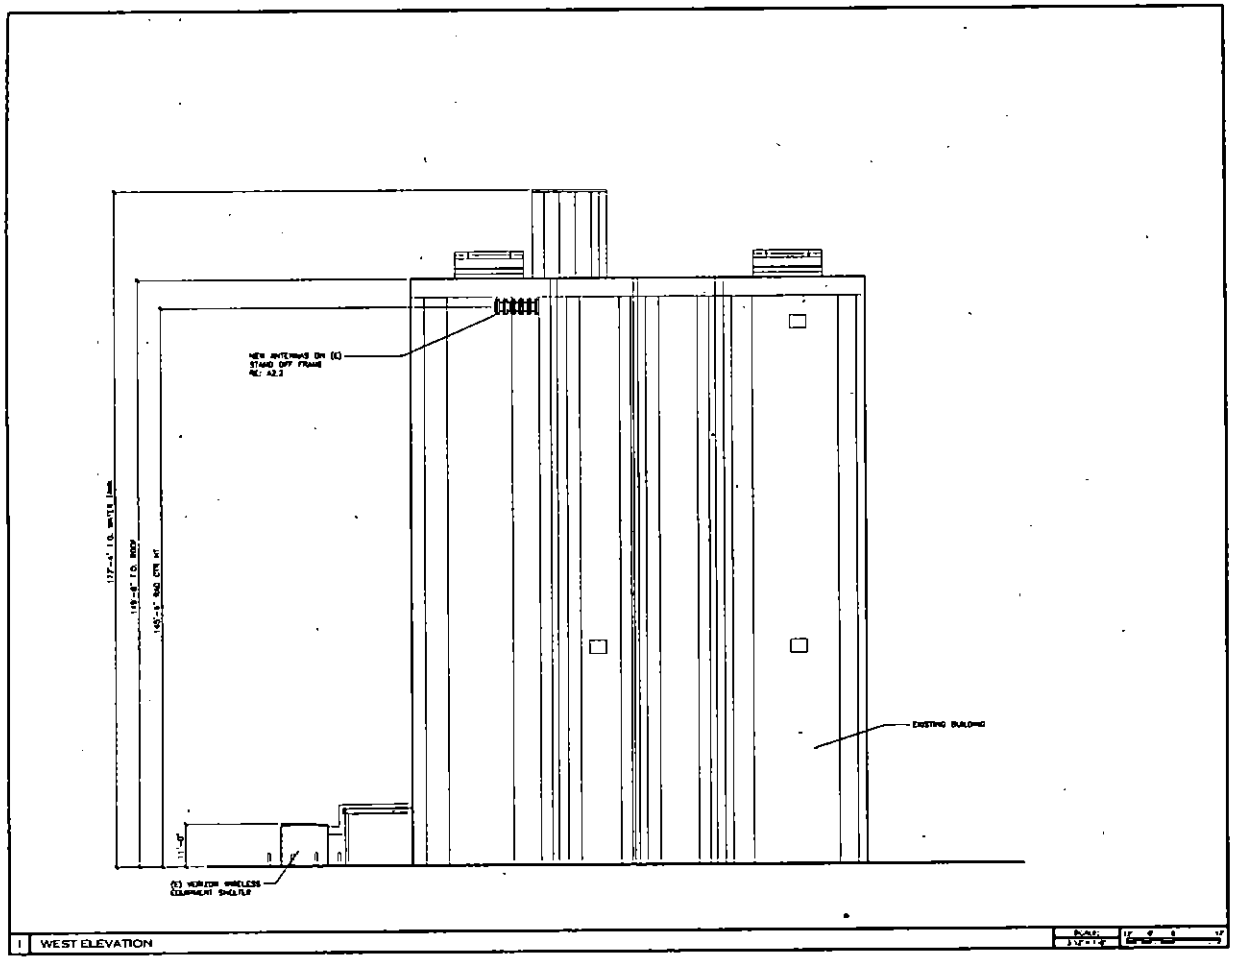

1 WEST ELEVATION

verizon wireless

DEN LYONS

215

SOUTHDOWN CEMENT PLANT
5134 LITE HIGHWAY
LEWISVILLE, CO 80503

Rev	Date	Description	By
A			
B			
C			
D			

PLANS PREPARED BY

CSAi

ARCHITECTURE – PLANNING – DESIGN

DRAWN BY | CHK | APV
JT | RJ | CS

CONSULTANT


SHEET TITLE

ELEVATION


SHEET NUMBER

A3.1

B0-12-0016

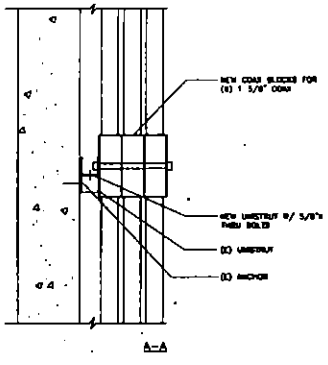


5 CABLE TRAY DETAIL

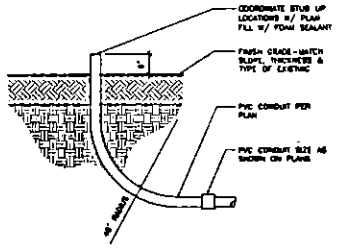


NOTE:
INSTALL 200# TENSILE PULL ROPE (TRUE-TAPE) GALVANIZED W/ FELT PADDLE (EMPTY CONDUITS) @ TOP OF AT EACH END.


3 CONDUIT DETAIL

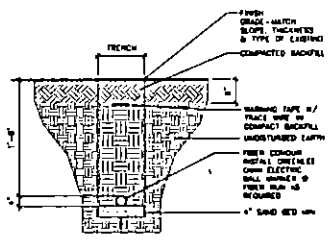


NOTES:
1. INSTALL ALL UNDERGROUND UTILITIES PER LOCAL UTILITY REQUIREMENTS.
2. LOCATE ALL UNDERGROUND UTILITIES PRIOR TO TRENCHING / EXCAVATION
3. COORDINATE SIZE AND TYPE WITH LOCAL UTILITY COMPANIES REQUIREMENTS.
4. REFER TO ELECT PLAN FOR EXACT SIZE AND LOCATION
5. COMPACT BACKFILL TO 95% PROCTOR DENSITY AT ALL DRIVEWAY OR HARD SURFACED AREAS. COMPACT TO 90% PROCTOR DENSITY ALL OTHER AREAS UNLESS NOTED OTHERWISE.
REFER TO GEOTECHNICAL REPORT.
6. BACKFILL AND SAND BED NOT REQ'D WHEN BORING.

2 TRENCH DETAIL

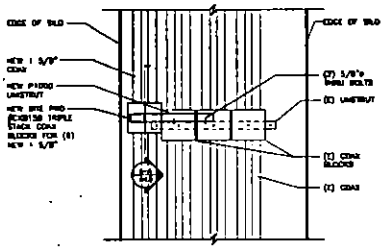

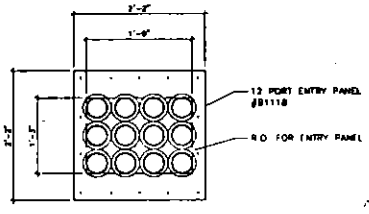

4 NEW ENTRY PORT DETAIL

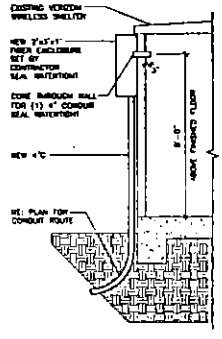

1 SECTION AT FIBER ENCLOSURE

verizon wireless
3131 S Vaughn Way, Suite 300
Aurora, CO 80014
Phone: 303.873.3900

PROJECT INFORMATION:

DEN LYONS
SITE #
215
SOUTHDOWN CEMENT PLANT
5134 UT-148 HIGHWAY
LEWISBURY, UTAH 84061

NO.	DATE	BY
A	08/09/11	MW
B	09/12/11	JH
C	11/02/11	JH
D	11/30/11	JH

PLANS PREPARED BY

CSAi
CELLULAR SYSTEMS ARCHITECTURAL, Inc.
ARCHITECTURE - PLANNING - DESIGN
1438 SOUTH 2440 EAST, SUITE 100
LITTLETON, COLORADO 80127
OFFICE: 303.797.9171
FAX: 720.348.6447

DRAWN BY	CHK	APV
JH	TN	EB

CONSULTANT

SHEET TITLE

DETAILS

SHEET NUMBER

A4.0

MODIFY: Plans & Elevations Windows 7 (TRUEPA) current CSAi.dwg
PLOTTED: Nov 21, 2011 - 4:47:43pm

BUILDING PERMIT

Land Use Department Building Safety and Inspection Division
Courthouse Annex - 2045 13th St. - 13th & Spruce Streets
P.O. Box 471 Boulder Colorado 80306-0471
www.bouldercounty.org

Permit Number	Application Date
BP-12-0016	01/04/2012

PROJECT LOCATION

Project Address	Unit	City	General Neighborhood
5134 UTE HIGHWAY		LONGMONT	990962.00

Parcel Number	Asr. Account No.	Subdivision Name	Section	Township	Range	Jurisdiction	GIS Property Area (Acres)
120328000001	R0506467	TR, NBR 990 - COMMERCIAL	28	3N	70	Boulder County	866

OWNER

Owner Name & Address	Phone
Cemex Inc Po Box 529 Lyons, CO 80540	303-823-2128
Email	

CONTRACTOR/AGENT

Contractor Name & Address	Phone 1
MOUNTAIN WIRELESS CONSTRUCTION, INC. Randall Hanson 927 Salida Way Aurora, CO 80011	303-343-6544
Email: randy@mtwire.com	Phone 2

WORK DESCRIPTION

Reconfigure and/or Replace 12 Antennas & Add 6 Antennas / Route Fiber Optic Conduit to Existing Equipment Structure

APPLICATION DETAILS

Application Type	Project Valuation	Zoning District	Occupancy Load	HERS Required	HERS Esbmated	Onsite Renew Offset Req'd
Commercial Remodel	$15,000	Agricultural				

Structure Type	Construction Type	Snow Load (PSF)	Wind Speed (MPH)	Wildfire Hazard	Sprinkler Required
325 - Public works, utility bldgs (H2O supply, sew	IRC	0	0		Not Required

FEES

Fee Item	Paid Date	Amount
Building Permit Fee	06/24/2013	$269.99
Plan Check	06/24/2013	$175.49
Open Space (2011) Tax .15%	06/24/2013	$11.25
Open Space Tax .10%	06/24/2013	$7.50
Open Space Tax .25%	06/24/2013	$18.75
Transportation Improvements - Trails Tax	06/24/2013	$1.13
Transportation Improvements Tax	06/24/2013	$6.38
Worthy Cause II Tax	06/24/2013	$3.75
Jail Improvement and Operations Tax	06/24/2013	$3.75
Open Space (2005) Tax .10%	06/24/2013	$7.50
Application Deposit Fee	06/24/2013	$25.00
Application Deposit Fee (Adjustment)	06/24/2013	($25.00)
	Total Taxes	**$60.01**
	Total Paid	**$505.49**

UTILITIES AND SERVICES

Water Provider	Sanitation Provider
St Vrain Lefthand Water District	none
Gas Provider	**Electric Provider**
Xcel Energy	LONGMONT POWER
Fire Service Provider	
HYGIENE FIRE	

Approved by Chief Building Official	Date of Issue
Gary Goodell	06/24/2013

The approval of plans and specifications does not permit the violation of any soction of the Boulder County Building Code, Land Use Code, or any other Ordinance or State Law.

Permit shall become null and void if construction is not commenced within 180 days of issuance, or if work is suspended or abandoned for a period of 180 days after the work is commenced.

5134 Ute Hwy

REQUIREMENTS AND REMARKS

Land Use Department Building Safety and Inspection Division
Courthouse Annex - 2045 13th St. - 13th & Spruce Streets
P.O. Box 471 Boulder Colorado 80306-0471
www.bouldercounty.org

Permit Number
BP-12-0016

Requirement/Remark	Issued By
2009 CODES	LANDUSE - BUILDING, Michelle Huebner

Comments — ON BP BLDG

All work to comply with the provisions of the Boulder County Building Code to include: the 2009 IBC, 2009 IMC, 2009 IPC, 2009 IFGC, 2009 IECC, 2011 NEC, and the Boulder County Amendments.

Written documentation for Job Site Recycling is required prior to final approval.

New or replacement exterior lights fixtures must be down-lit and fully shielded fixture. Down lighting is required, meaning that all bulbs must be fully shielded to prevent light emissions above a horizontal plane drawn from the bottom of the fixture. All exterior light fixtures must be in conformance with Article 7-1600 and Articel 18-162A of the Boulder County Land Use Code.

Requirement/Remark	Issued By
SPR Compliance	LANDUSE - PLANNING, Hannah Hippely

Comments — ON BP SPR

All requirements of the final Minor Modification Letter regarding SPR-97-160 apply to this Building Permit. A Planning/SPR Complete inspection is required at which time the following will be inspected and verified:

Any vegetated areas disturbed during the upgrade construction shall be revegetated.
All antenna support strucutres and wiring shall be flush mounted to the silo wall as possible and painted to match the exisitng strucutre.

Note to Inspector - Packet will not be provided.

INSPECTION RECORD

Inspector must date and initial each inspection pertaining to this job.

DO NOT CONCEAL ANY WORK UNTIL APPROVED BY INSPECTOR

Site Address	Permit Number
5134 UTE HIGHWAY	BP-12-0016

ROUGH BUILDING INSPECTIONS

Inspection	Date Approved	Inspector	Comments	Not Approved Date	Not Approved Inspector
Silt Barriers					
Footings, Pads					
Setback Survey					
Pre-Foundation Wildfire Mit					
Foundation Walls-Reinforcing					
Concrete Encased Electrode					
Damp Proofing					
Underground Electric					
Underground Plumbing					
Underground Gas Piping					
Manual J & D					
Sprinkler Plan Review					
Rough Sprinkler					
Height Survey					
Structural Framing					
Rough Framing					
Rough Heating & Ventilation					
Rough Electric					
Rough Plumbing					
Rough Gas Piping					
Rough Other					
Insulation					
Wallboard					

FINAL BUILDING INSPECTIONS

Inspection	Date Approved	Inspector	Comments	Not Approved Date	Not Approved Inspector
Final Grading & Drainage					
Final Framing					
Final Heat & Ventilation					
Final Electric	6/26/13	BEN			
Final Plumbing					
Final Roof					
Final HERS or Prescriptive					
Final Recycling Receipts					
Final Sprinkler					
Final Other					
Building Inspection Complete	6/26/13	BEN			
Final Wildfire					
Planning/Final SPR					

METER RELEASES

Inspection	Date Approved	Inspector	Agency	Corrections	Release Date	By
Temporary Electric Meter						
Electric Meter Release						
Gas Meter Release						
Net Meter						

Building division staff informs utility companies of released meters on the business day following the meter release inspection.

OTHER AGENCY FINAL INSPECTIONS

Department	Date Approved	Staff	Comments
Public Health Inspection			
Transportation Access			
Transportation Floodplain			
Fire District			
Other Agency Inspection			

ALL REQUIREMENTS COMPLETE

	Date	Staff	Comments
All Requirements Complete	6/26/13	KA	

Long Permit Inspection List

All inspection requests must be received by 3:30pm, in order to be scheduled for the following business day. Please provide the following information: PERMIT NUMBER, PROJECT ADDRESS, OWNER NAME, TYPE OF INSPECTION, CONTACT NAME, and CONTACT PHONE NUMBER.
CALL: (303) 441-3925, press 1 to schedule an inspection.

Building_Permit_LU_v5-0 6/24/2013

verizon wireless

PROJECT: DS3 - LTE
SITE NAME: DEN LYONS
SITE I.D. #: 215
ADDRESS: 5134 UTE HIGHWAY LONGMONT, CO 80503

DRAWING SYMBOL LEGEND

- SECTION CUT
- INTERIOR ELEVATION FLAG
- EXTERIOR ELEVATION FLAG
- DETAIL OR PLAN ENLARGEMENT
- REVISION
- SPOT ELEVATION
- GRID REFERENCE
- ELECTRICAL
- TELCO
- ELEC & TELCO
- COAXIAL CABLE
- CAS LINE
- WATER LINE
- SEWER LINE
- SANITARY SEWER
- FIBER OPTIC CABLE
- OVERHEAD UTILITIES
- CHAIN LINK FENCE
- WOODEN FENCE
- LEASE AREA/ PROPERTY BOUNDARY
- RAILROAD TRACKS
- STEEL STUD
- BATT INSULATION
- EXISTING TOPOGRAPHY
- PROPOSED TOPOGRAPHY
- WATER DRAINAGE FLOW

GENERAL NOTES

1. DRAWINGS ARE NOT TO BE SCALED, WRITTEN DIMENSIONS TAKE PRECEDENCE, AND THIS SET OF PLANS IS INTENDED TO BE USED FOR DIAGRAMMATIC PURPOSED ONLY, UNLESS NOTED OTHERWISE. THE GENERAL CONTRACTOR'S SCOPE OF WORK SHALL INCLUDE FURNISHING ALL MATERIALS, EQUIPMENT, LABOR, AND ANYTHING ELSE DEEMED NECESSARY TO COMPLETE INSTALLATIONS AS DESCRIBED HEREIN.

2. PRIOR TO THE SUBMISSION OF BIDS, THE CONTRACTORS INVOLVED SHALL VISIT THE JOB SITE AND FAMILIARIZE THEMSELVES WITH ALL CONDITIONS AFFECTING THE PROPOSED PROJECT, WITH THE CONSTRUCTION AND CONTRACT DOCUMENTS. FIELD CONDITIONS AND CONFIRM THAT THE PROJECT MAY BE ACCOMPLISHED AS SHOWN PRIOR TO PROCEEDING WITH CONSTRUCTION. ANY ERRORS, OMISSIONS, OR DISCREPANCIES ARE TO BE BROUGHT TO THE ATTENTION OF THE ARCHITECT/ENGINEER IN WRITING.

3. THE GENERAL CONTRACTOR SHALL RECEIVE WRITTEN AUTHORIZATION TO PROCEED WITH CONSTRUCTION PRIOR TO STARTING WORK ON ANY ITEM NOT CLEARLY DEFINED BY THE CONSTRUCTION DRAWINGS/CONTRACT DOCUMENTS.

4. THE CONTRACTOR SHALL SUPERVISE AND DIRECT THE PROJECT DESCRIBED HEREIN. THE CONTRACTOR SHALL BE SOLELY RESPONSIBLE FOR ALL CONSTRUCTION MEANS, METHODS, TECHNIQUES, SEQUENCES AND PROCEDURES AND FOR COORDINATING ALL PORTIONS OF THE WORK UNDER THE CONTRACT.

5. THE CONTRACTOR SHALL INSTALL ALL EQUIPMENT AND MATERIALS ACCORDING TO MANUFACTURER'S/ VENDOR'S SPECIFICATIONS UNLESS NOTED OTHERWISE OR WHERE LOCAL CODES OR ORDINANCES TAKE PRECEDENCE.

6. ALL WORK PERFORMED ON PROJECT AND MATERIALS INSTALLED SHALL BE IN STRICT ACCORDANCE WITH ALL APPLICABLE CODES, REGULATIONS, AND ORDINANCES. CONTRACTOR SHALL GIVE ALL NOTICES AND COMPLY WITH ALL LAWS, ORDINANCES, RULES, REGULATIONS AND LAWFUL ORDERS OF ANY PUBLIC AUTHORITY, MUNICIPAL AND UTILITY COMPANY SPECIFICATIONS, AND LOCAL AND STATE JURISDICTIONAL CODES BEARING ON THE PERFORMANCE OF THE WORK.

7. THE STRUCTURAL COMPONENTS OF THIS PROJECT SITE/FACILITY ARE NOT TO BE ALTERED BY THIS CONSTRUCTION PROJECT UNLESS NOTED OTHERWISE.

8. ANTENNA SUPPORTING STRUCTURE IS UNDER A SEPARATE CONTRACT. THE CONTRACTOR SHALL ASSIST ANTENNA INSTALLATION SUBCONTRACTOR IN TERMS OF COORDINATION AND SITE ACCESS. ERECTION SUBCONTRACTOR SHALL BE RESPONSIBLE FOR PROTECTION OF PERSONNEL AND PROPERTY FROM HAZARDOUS EXPOSURE TO OVERHEAD DANGERS.

9. GENERAL CONTRACTOR SHALL PROVIDE AT THE PROJECT SITE A FULL SET OF CONSTRUCTION DOCUMENTS UPDATED WITH THE LATEST REVISIONS AND ADDENDA OR CLARIFICATIONS FOR THE USE BY ALL PERSONNEL INVOLVED WITH THE PROJECT.

10. DETAILS INCLUDED HEREIN ARE INTENDED TO SHOW END RESULT OF DESIGN. MINOR MODIFICATIONS MAY BE REQUIRED TO SUIT JOB CONDITIONS OR SITUATIONS, AND SUCH MODIFICATIONS SHALL BE INCLUDED AS PART OF THE SCOPE OF WORK.

11. THE FACILITY IS CELLULAR RADIO EQUIPMENT AND ANTENNAS.

12. THE CONTRACTOR SHALL MAKE NECESSARY PROVISIONS TO PROTECT EXISTING IMPROVEMENTS, EASEMENTS, PAVING, CURBING, ETC. DURING CONSTRUCTION UPON COMPLETION OF WORK, CONTRACTOR SHALL REPAIR ANY DAMAGE THAT MAY HAVE OCCURRED DUE TO CONSTRUCTION ON OR ABOUT THE PROPERTY.

13. CONTRACTOR SHALL ENSURE THE GENERAL WORK AREA IS KEPT CLEAN AND HAZARD FREE DURING CONSTRUCTION AND DISPOSE OF ALL DIRT, DEBRIS, RUBBISH AND REMOVE EQUIPMENT NOT SPECIFIED AS REMAINING ON THE PROPERTY, PREMISES SHALL BE LEFT IN CLEAN CONDITION AND FREE FROM PAINT SPOTS, DUST, OR SMUDGES OF ANY NATURE.

14. THE ARCHITECTS/ENGINEERS HAVE MADE EVERY EFFORT TO SET FORTH IN THE CONSTRUCTION AND CONTRACT DOCUMENTS THE COMPLETE SCOPE OF WORK. CONTRACTORS BIDDING THE JOB ARE NEVERTHELESS CAUTIONED THAT MINOR OMISSIONS OR ERRORS IN THE DRAWINGS AND OR SPECIFICATIONS SHALL NOT EXCUSE SAID CONTRACTOR FROM COMPLETING THE PROJECT AND IMPROVEMENTS IN ACCORDANCE WITH THE INTENT OF THESE DOCUMENTS. THE BIDDER SHALL BEAR THE RESPONSIBILITY OF NOTIFYING (IN WRITING) THE ARCHITECT/ENGINEER OF ANY CONFLICTS, ERRORS, OR OMISSIONS PRIOR TO THE SUBMISSION OF CONTRACTOR'S PROPOSAL IN THE EVENT OF DISCREPANCIES THE CONTRACTOR SHALL PRICE THE MORE COSTLY OR EXTENSIVE WORK, UNLESS DIRECTED OTHERWISE.

15. SPECIAL INSPECTION TESTING REQUIRED SPECIAL INSPECTIONS SHALL BE PERFORMED BY AN INDEPENDENT SPECIAL INSPECTOR PER SECTION 1701 OF THE UNIFORM BUILDING CODE (UBC) FOR THE FOLLOWING:

A. CONCRETE: DURING THE TAKING OF CONCRETE TEST SPECIMENS AND PLACING STRUCTURAL REINFORCING AND STRUCTURAL CONCRETE, VERIFY REINFORCING SIZE, PLACEMENT AND GRADE.

B. BOLTS, AND ANCHORS IN CONCRETE HOLD-DOWN ANCHOR BOLTS, INSPECT SIZE, LENGTH, TYPE (EXPANSION, EPOXY) AND SPACING.

PROJECT TEAM

CLIENT
VERIZON WIRELESS
CONSTRUCTION MANAGER
CHAD WEBER
3131 S. VAUGHN WAY
SUITE 550
AURORA, CO 80014
PHONE: 303.873.2672

SITE ACQUISITIONIST
DAVE CLOSSER
CLOSSER CONSULTING LLC
4628 CORDON DR.
BOULDER, CO 80305
PHONE: 303.554.5627
MOBILE: 303.859.1080
FAX: 303.554.2002

RF ENGINEER
VERIZON WIRELESS
DAVID BORN
SENIOR RF ENGINEER
3131 S. VAUGHN WAY
SUITE 550 AURORA, CO
80014 PHONE:
303.829.0002

ARCHITECT:
CHARLES STECKLY
CSAI
5935 S. ZANG ST.
SUITE 280
LITTLETON, CO 80127
PHONE: 303.932.9974
FAX: 303.932.6561

LEC:
BARTON GARNER
CENTURY LINK
LONGMONT, CO
PHONE: 303.255.6122

PROJECT DATA

JURISDICTION:	–	BOULDER COUNTY
ZONING DESIGNATION:	–	G1
OCCUPANCY CROUP:	–	U
CONSTRUCTION TYPE:	–	V–B
FULLY SPRINKLERED:	–	N/A
NO. OF STORIES:	–	N/A

GOVERNING CODES:
2009 IBC, 2009 IMC, 2009 IFC, 2009 IECC 2011 NEC

A.D.A. COMPLIANCE:
THIS FACILITY IS UNMANNED AND NOT FOR HUMAN HABITATION.

PROJECT DESCRIPTION

SITE AUDIT FOR FIBER INSTALLATION. REMOVE & REPLACE ANTENNAS. ADD 6 ANTENNAS AND NEW COAX.

GENERAL CONTRACTOR NOTE

CONTRACTOR SHALL VERIFY ALL PLANS AND EXISTING DIMENSIONS AND CONDITIONS ON THE JOB SITE AND SHALL IMMEDIATELY NOTIFY THE ARCHITECT IN WRITING OF ANY DISCREPANCIES BEFORE PROCEEDING WITH THE WORK OR BE RESPONSIBLE FOR SAME.

THESE DRAWINGS ARE ONLY TO SCALE WHEN PLOTTED ON 24x36 SHEET. USE GRAPHIC SCALE WHEN PLOTTED ON 11x17 SHEET.

CALL BEFORE YOU DIG – COLORADO LAW REQUIRES 3 WORKING DAYS NOTICE FOR CONSTRUCTION PHASE.
UTILITY NOTIFICATION CENTER OF COLORADO – 1-800-922-1987


THESE DRAWINGS MAY NOT SHOW ALL UNDERGROUND PIPING AND UTILITIES. THE CONTRACTOR SHALL EXERCISE EXTREME CARE DURING ALL EXCAVATION AND OTHER CONSTRUCTION ACTIVITIES.

CONTRACTOR IS RESPONSIBLE FOR ALL UTILITY LOCATES AND UTILITY RELOCATIONS REQUIRED FOR THIS INSTALLATION. CONTRACTOR SHALL SCHEDULE AND COORDINATE ALL WORK WITH THE OWNER TO ENSURE NO DISRUPTION TO OWNERS OPERATIONS.

DRAWING INDEX

SHEET	DESCRIPTION
T1.0	TITLE SHEET
A1.0	SITE PLAN
A1.1	ENLARGED SITE PLAN
A2.0	EQUIPMENT ROOM PLANS
A2.1	EQUIPMENT DETAILS
A2.2	ANTENNA PLAN & RF DATA
A3.0	ELEVATION
A3.1	ELEVATION
A4.0	DETAILS

VICINITY MAP

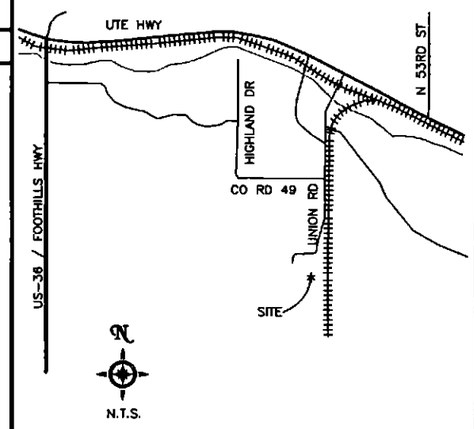

DIRECTIONS TO SFFE

HEAD WEST ON S. VAUGHN WAY. TURN LEFT ONTO THE COLORADO 83 N RAMP TO I-225. MERGE ONTO S. PARKER ROAD. TAKE THE I-225 N RAMP. KEEP RIGHT AT FORK, FOLLOW SIGNS FOR I-225 N AND MERGE ONTO I-225 N. TAKE EXIT 12A ON THE LEFT TO MERGE ONTO I-70 W TOWARD DENVER. SLIGHT RIGHT ONTO I-270 W (SIGNS FOR FORT COLLINS) CONTINUE ONTO US-36 W. TURN RIGHT ONTO US-86/UTE HWY. DESTINATION WILL BE ON THE RIGHT.

APPROVAL BLOCK

TITLE	SIGNATURE	DATE
OWNER		
ENGINEER		
CONSTRUCTION MGR.		
PROJECT MANAGER		

AGKNOWLEDGMENT OR "SIGN-OFF" BY PARTIES TO THE CONSTRUCTION DRAWINGS DOES NOT CONSTITUTE ALTERATION OF THE LEASE TERMS.

verizon wireless
VERIZON WIRELESS SERVICES
3131 S. VAUGHN WAY, SUITE 550
AURORA, CO 80014
PHONE: 303.873.2800

PROJECT INFORMATION:
SITE NAME
DEN LYONS
SITE I.D.
215
SOUTHDOWN CEMENT PLANT
5134 UTE HIGHWAY
LONGMONT, CO 80503

REV:	DATE:	DESCRIPTION:	BY:
A	09/08/11	CD REVIEW	SSB
B	09/19/11	CLIENT COMMENTS	JTT
C	11/03/11	CLIENT COMMENTS	JTT
D	11/21/11	CLIENT COMMENTS	MF
0	12/03/11	CD ISSUE	SSB

PLANS PREPARED BY:
CSAi
CHARLES STECKLY ARCHITECTURE, Inc.
ARCHITECTURE – PLANNING – DESIGN
5935 SOUTH ZANG STREET, SUITE 280
LITTLETON, COLORADO 80127
OFFICE: 303.932.9974
FAX: 303.932.6561

LICENSURE NO:
CHARLES N. STECKLY
JAN 03 2012
NO. 20200?
STATE OF COLORADO

DRAWN BY: CHS | APV: JTT | IN | CS


CONSULTANT:

REVIEWED
JAN 18 2012
BOULDER COUNTY
BUILDING DIVISION

SHEET TITLE:
TITLE SHEET

SHEET NUMBER:
T1.0

C:\DOCUME~1\sbode\LOCALS~1\Temp\AcPublish_21441\T10.dwg
PLOTTED Jan 03, 2012 AT 11:34am

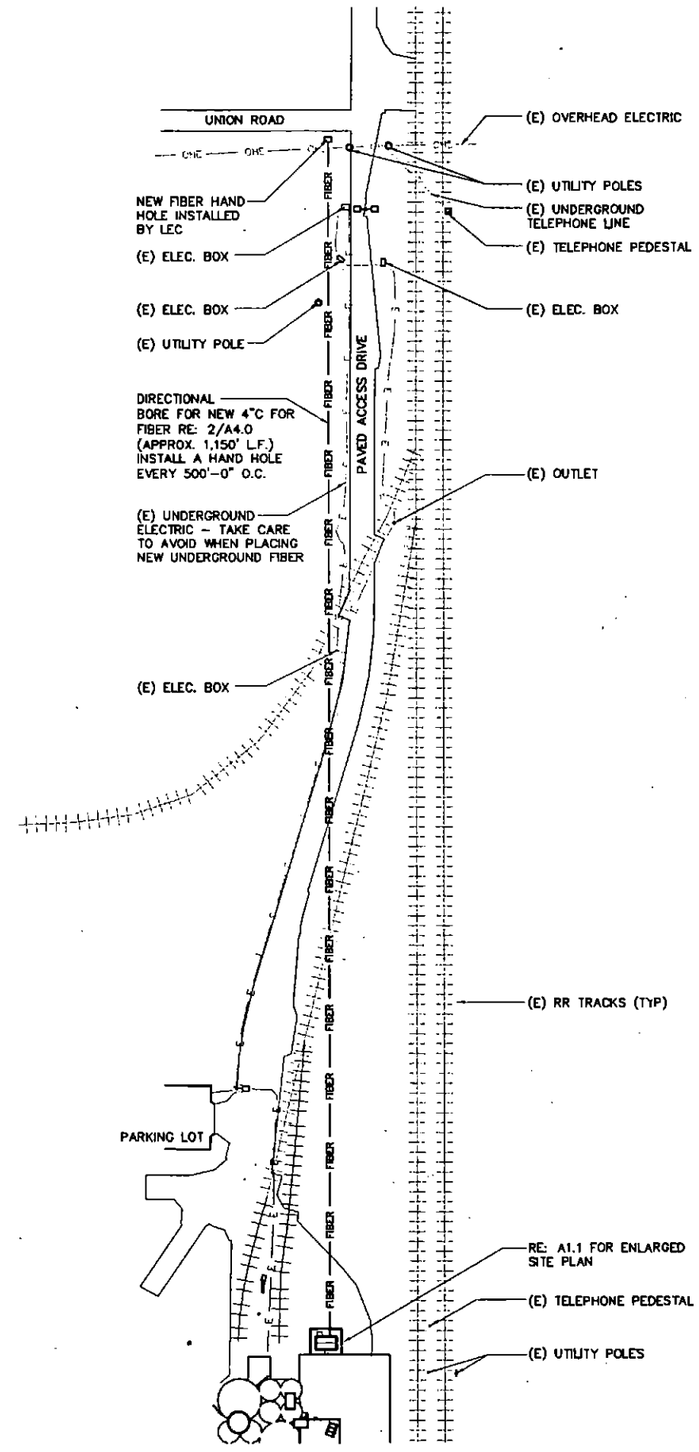

1 PARTIAL SITE PLAN

SCALE: 1/64" = 1'-0"

64' 32' 0 64'

REVIEWED
JAN 18 2012
BOULDER COUNTY
BUILDING DIVISION

M:\2011\Projects\Verizon Wireless LTE\DEN Lyons\CDA\10.dwg
PLOTTED Jan 03, 2012 AT 11:34am

verizon wireless

VERIZON WIRELESS SERVICES
3131 S. VAUGHN WAY, SUITE 550
AURORA, CO 80014
PHONE: 303.873.2800

PROJECT INFORMATION:

SITE NAME
DEN LYONS
SITE I.D.
215
SOUTHDOWN CEMENT PLANT
5134 UTE HIGHWAY
LONGMONT, CO 80503

REV:	DATE:	DESCRIPTION:	BY:
A	06/05/11	CD REVIEW	SSS
B	09/19/11	CLIENT COMMENTS	JTT
C	11/03/11	CLIENT COMMENTS	JTT
D	11/21/11	CLIENT COMMENTS	MF
D	12/03/11	CD ISSUE	SSS

PLANS PREPARED BY:

CSAi
CHARLES STECKLY ARCHITECTURE, Inc.
ARCHITECTURE - PLANNING - DESIGN
5935 SOUTH ZANG STREET, SUITE 280
LITTLETON, COLORADO 80127
OFFICE: 303.932.9974
FAX: 303.932.9661

C.A. LICENSURE NO.


CHARLES N. STECKLY
JAN 03 2012
No. 202602
STATE OF COLORADO

DRAWN BY:	CHK:	APV:
JTT	JN	CS

CONSULTANT:

SHEET TITLE:
SITE PLAN

SHEET NUMBER:
A1.0

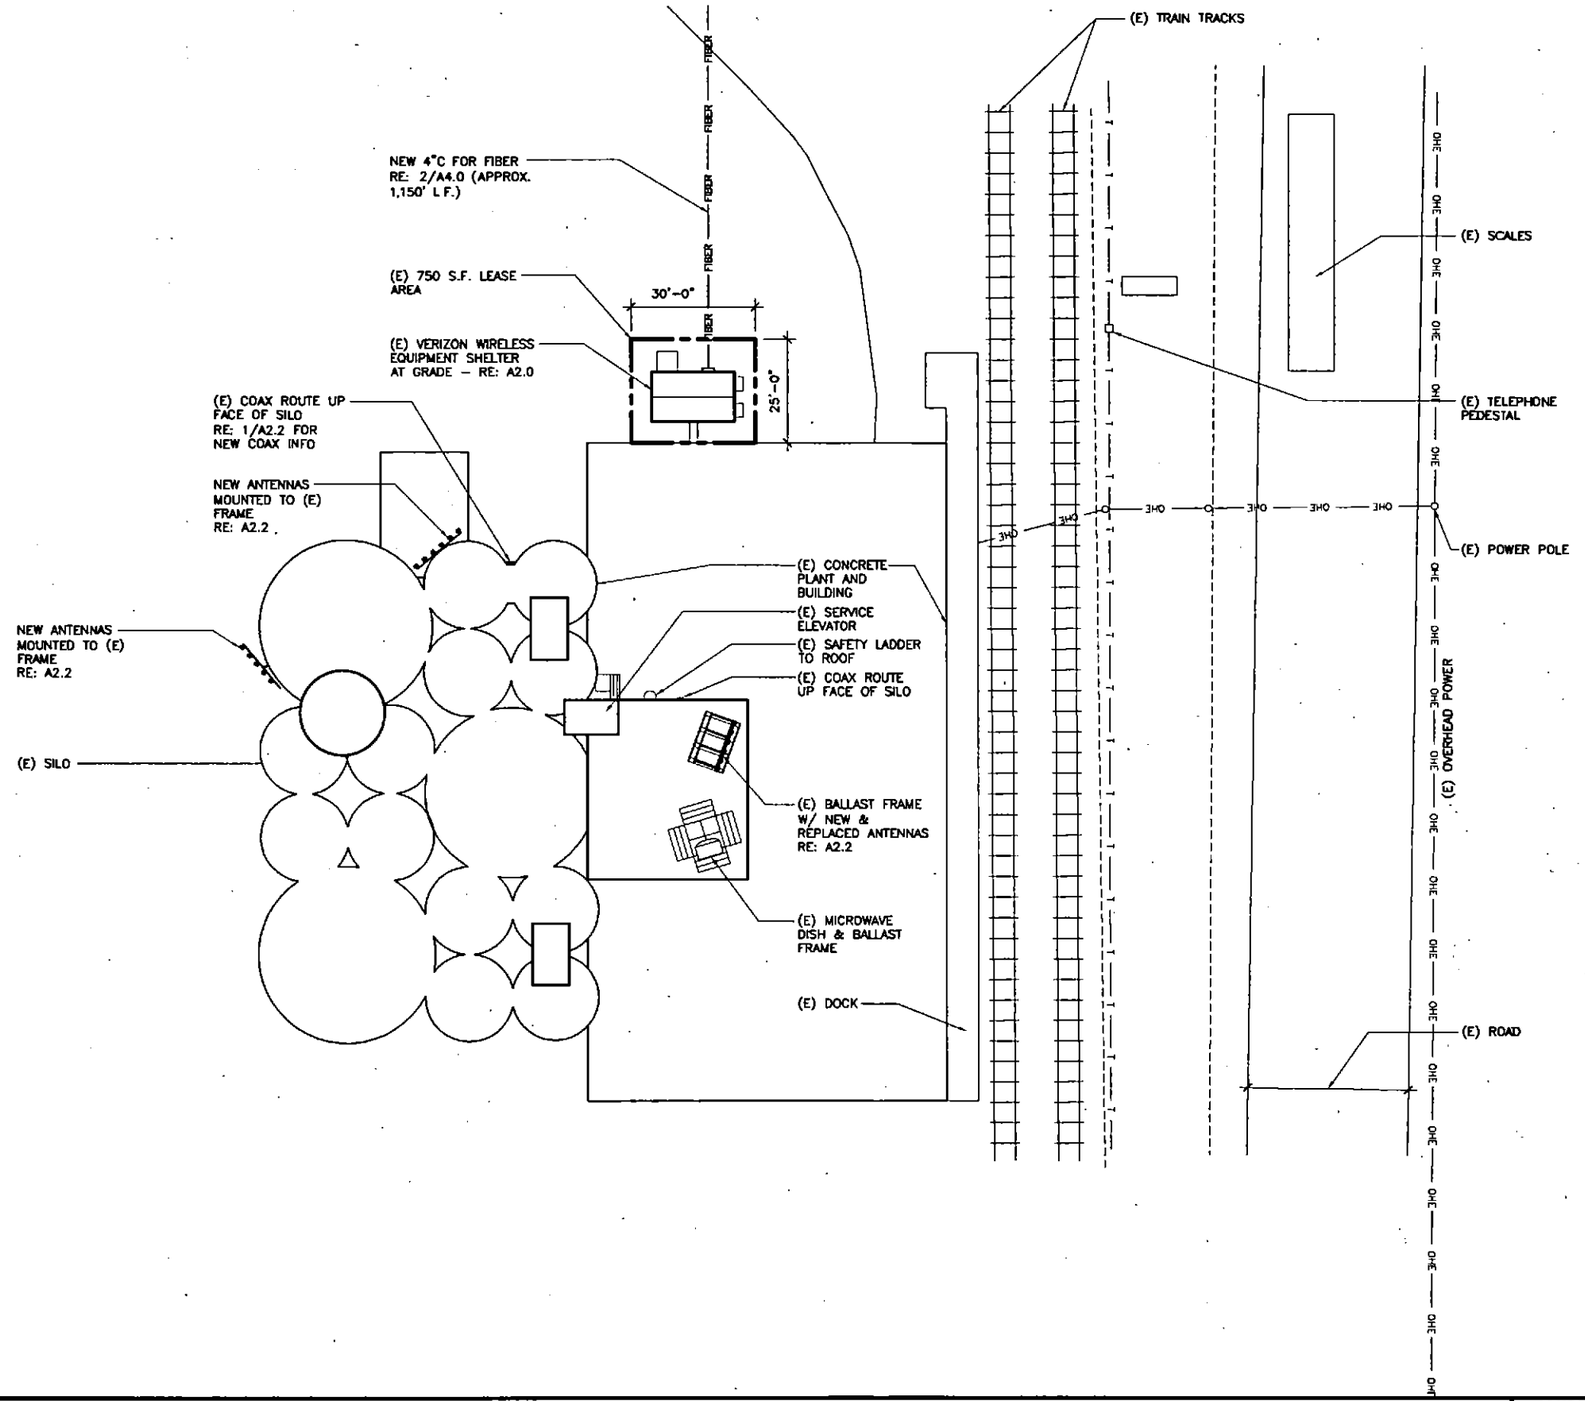

1 ENLARGED SITE PLAN

SCALE: 1/16" = 1'-0"

16' 8' 0 16'

M:\2011\Projects\Verizon Wireless LTE\DEN Lyons\CDA11.dwg
PLOTTED Jan 03, 2012 AT 11:34am

verizon wireless

VERIZON WIRELESS SERVICES
3131 S. VAUGHN WAY, SUITE 550
AURORA, CO 80014
PHONE: 303.873.2800

PROJECT INFORMATION:

SITE NAME
DEN LYONS
SITE I.D.
215
SOUTHDOWN CEMENT PLANT
5134 UTE HIGHWAY
LONGMONT, CO 80503

REV:	DATE:	DESCRIPTION:	BY:
A	08/08/11	CD REVIEW	SSB
B	09/19/11	CLIENT COMMENTS	JTT
C	11/03/11	CLIENT COMMENTS	JTT
D	11/21/11	CLIENT COMMENTS	MF
0	12/03/11	CD ISSUE	SSB

PLANS PREPARED BY:

CSAi
CHARLES STECKLY ARCHITECTURE, Inc.
ARCHITECTURE – PLANNING – DESIGN
5935 SOUTH ZANG STREET, SUITE 280
LITTLETON, COLORADO 80127
OFFICE: 303.932.9974
FAX: 303.932.6561

LICENSURE NO:

CHARLES N. STECKLY
JAN 03 2012
No. 202602

DRAWN BY: | CHK'D: | APV'D:
JTT | TN | CS

CONSULTANT:

REVISED
JAN 18 2012
BOULDER COUNTY
BUILDING DIVISION


SHEET TITLE:

ENLARGED SITE PLAN

SHEET NUMBER:

A1.1

NOTE: ALL ITEMS EXISTING U.N.O.

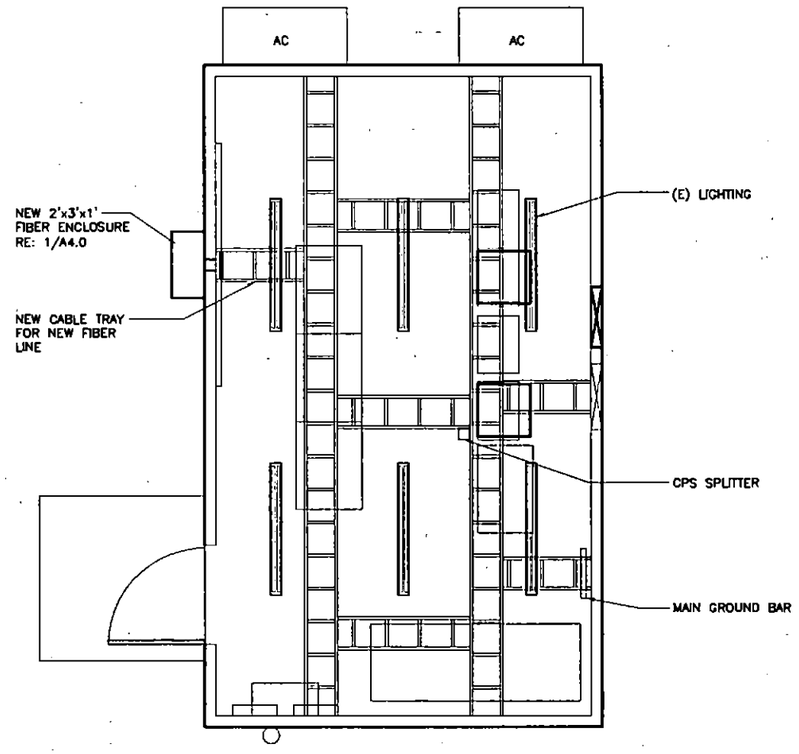


NORTH

2 REFLECTED CEILING PLAN

SCALE: 1/2" = 1'-0"

2' 1' 0 2'

NOTE: ALL ITEMS EXISTING U.N.O.

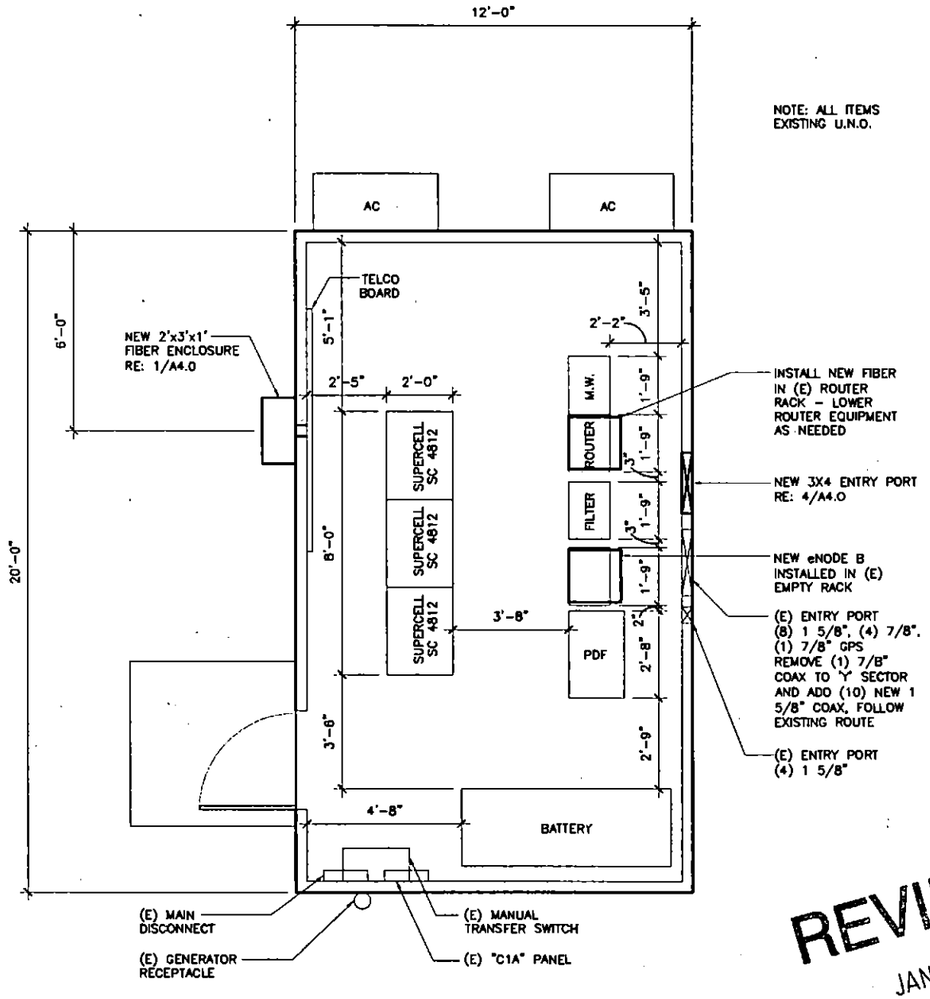

NORTH

1 EQUIPMENT PLAN

SCALE: 1/2" = 1'-0"

2' 1' 0 2'

M:\2011\Projects\Verizon Wireless LITE\DEN Lyons\CDA20.dwg
PLOTTED Jan 03, 2012 AT 11:34am

verizon wireless

VERIZON WIRELESS SERVICES
3131 S. VAUGHN WAY, SUITE 550
AURORA, CO 80014
PHONE: 303.873.2800

PROJECT INFORMATION:

SITE NAME
DEN LYONS
SITE I.D.
215
SOUTHDOWN CEMENT PLANT
5134 UTE HIGHWAY
LONGMONT, CO 80503

REV:	DATE:	DESCRIPTION:	BY:
A	09/08/11	CD REVIEW	SSB
B	09/16/11	CLIENT COMMENTS	JTT
C	11/03/11	CLIENT COMMENTS	JTT
D	11/21/11	CLIENT COMMENTS	MF
0	12/03/11	CD ISSUE	SSB

PLANS PREPARED BY:

CSAi
CHARLES STECKLY ARCHITECTURE, Inc.
ARCHITECTURE - PLANNING - DESIGN
5035 SOUTH ZANG STREET, SUITE 200
LITTLETON, COLORADO 80127
OFFICE: 303.932.0974
FAX: 303.932.8561

LICENSURE:

LICENSED ARCHITECT
CHARLES N. STECKLY
JAN 03 2012
No. 202802
STATE OF COLORADO


DRAWN BY:	CHK'D:	APV:
JTT	SSB	CS

CONSULTANT:


REVIEWED
JAN 10 2012
BOULDER COUNTY
BUILDING DIVISION

SHEET TITLE:
EQUIPMENT ROOM PLANS


SHEET NUMBER:
A2.0

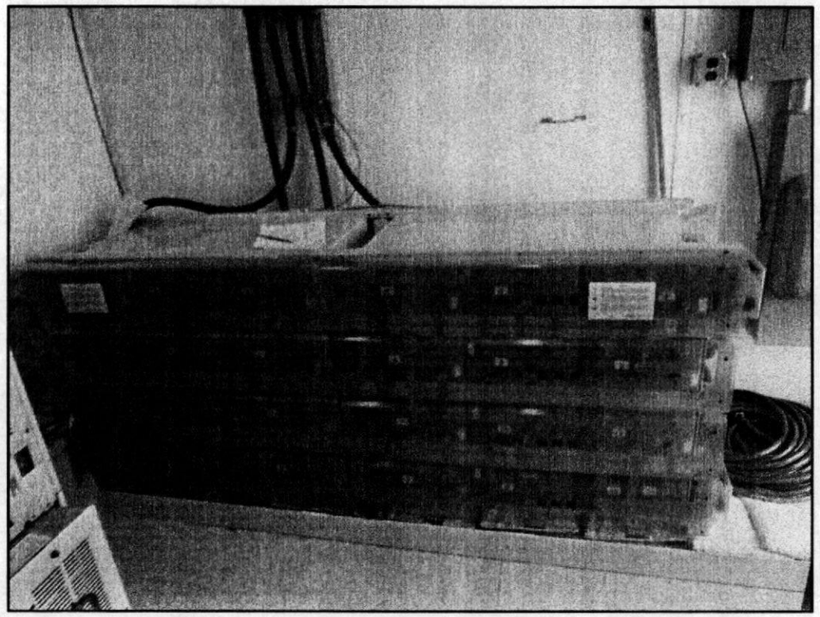

VIEW OF BATTERY

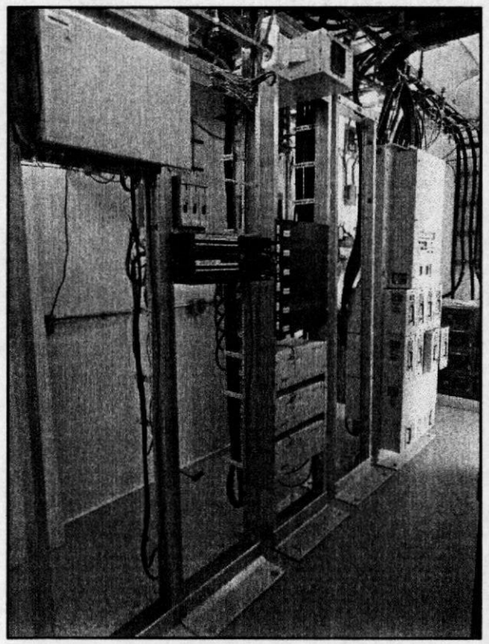

VIEW OF ROUTER RACK
(PROPOSED FIBER LOCATION)

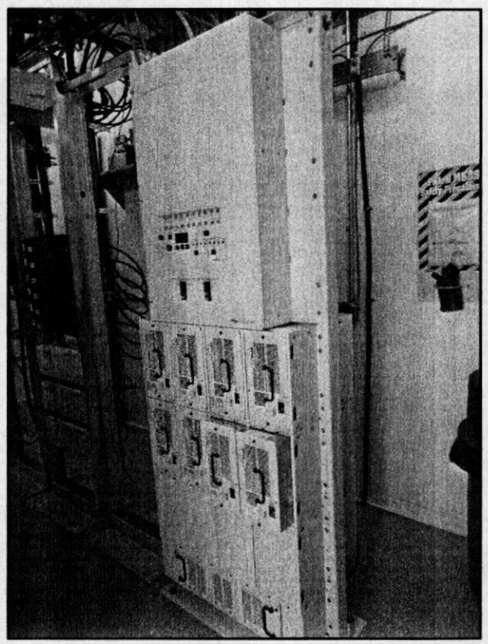

VIEW OF PDF


2 EQUIPMENT ROOM PHOTOGRAPHS


PDF RACK

LORAIN POWER SYSTEM
(6) 24 VDC RECTIFIERS IN USE
(2) SPARE

BATTERY RACK

ABSOLYTE 100A 33
1600AH
(24) BATTERIES

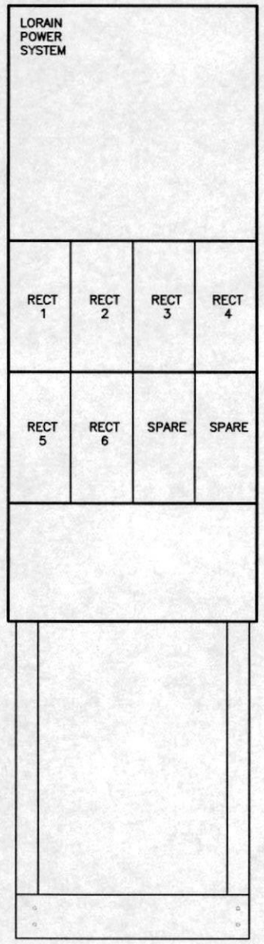

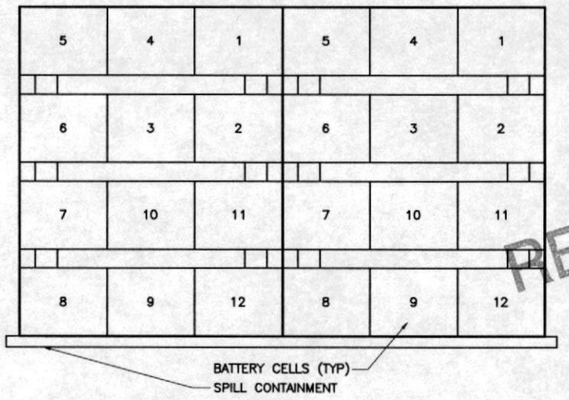

NOTE: ALL WORK IS EXISTING UNLESS NOTED OTHERWISE.

1 RACK ELEVATIONS

verizon wireless
VERIZON WIRELESS SERVICES
3131 S. VAUGHN WAY, SUITE 550
AURORA, CO 80014
PHONE: 303.873.2800

PROJECT INFORMATION:


SITE NAME
DEN LYONS
SITE I.D.
215
SOUTHDOWN CEMENT PLANT
5134 UTE HIGHWAY
LONGMONT, CO 80503

REV:	DATE:	DESCRIPTION:	BY:
A	08/08/11	CD REVIEW	SSB
B	09/19/11	CLIENT COMMENTS	JTT
C	11/03/11	CLIENT COMMENTS	JTT
D	11/21/11	CLIENT COMMENTS	MF
0	12/03/11	CD ISSUE	SSB

PLANS PREPARED BY:

CSAi
CHARLES STECKLY ARCHITECTURE, Inc.
ARCHITECTURE – PLANNING – DESIGN
5935 SOUTH ZANG STREET, SUITE 280
LITTLETON, COLORADO 80127
OFFICE: 303.932.9974
FAX: 303.932.8561

LICENSURE No:

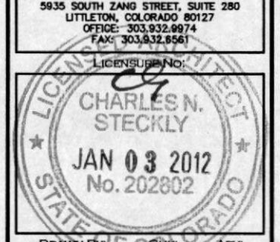

DRAWN BY:	CHK:	APV:
JTT	TN	CS

CONSULTANT:


REVIEWED
JAN 18 2012
BOULDER COUNTY
BUILDING DIVISION

SHEET TITLE:
EQUIPMENT DETAILS


SHEET NUMBER:
A2.1

M:\2011\Projects\Verizon Wireless LTE\DEN Lyons\CD\A21.dwg
PLOTTED Jan 03, 2012 AT 11:34am

NOTES:
1. CONTRACTOR TO PROVIDE MIN. BALLAST FOR ANTENNA FRAME AS REQ'D PER STRUCTURAL CALCULATIONS BY: OTEGUI STRUCTURAL SERVICES LLC, DATED 11/03/11.
2. CONTRACTOR TO NOTIFY ARCHITECT/ STRUCTURAL ENGINEER IMMEDIATELY IF CONDITIONS OTHER THAN SHOWN ON PLANS.

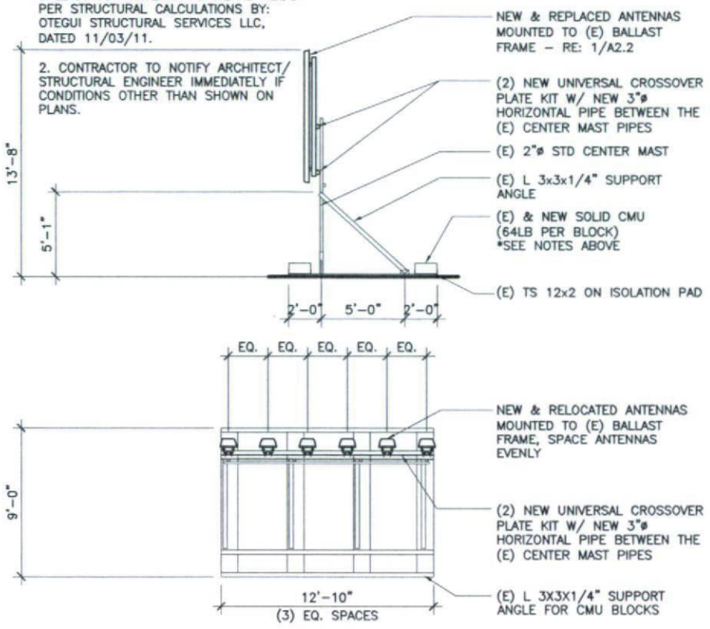

4 EXISTING BALLAST FRAME — SCALE: N.T.S.

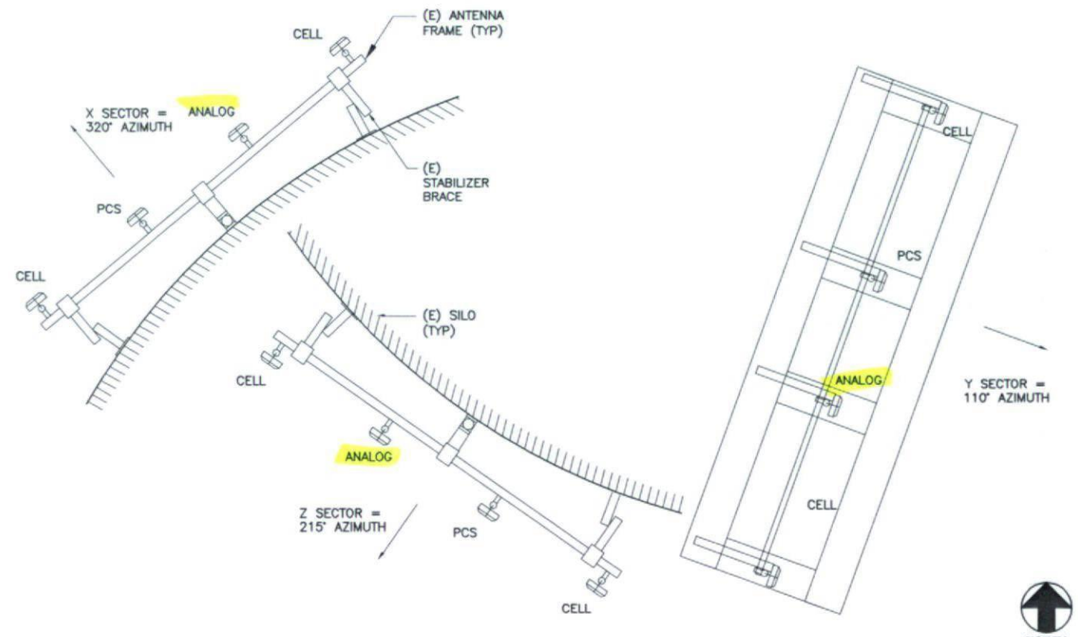


2 EXISTING ANTENNA CONFIGURATION — SCALE: N.T.S.

1. GENERAL: PROVIDE ALL LABOR, EQUIPMENT AND MATERIALS NECESSARY FOR RECEIVING, INSTALLING, TESTING AND ADJUSTING ANTENNA CABLES FROM THE ANTENNA TO THE CONNECTORS AT THE BASE TRANSMISSION SYSTEM (BTS). THIS SHALL INCLUDE ALL EQUIPMENT SHOWN OR REQUIRED FOR A COMPLETE OPERATING SYSTEM. ANTENNA, ANTENNA CABLES, CONNECTORS, AND FITTINGS SHALL BE THIRD PARTY FURNISHED COMPONENTS AS SHOWN ON THE BILL OF MATERIALS.
2. MATERIALS
   A. ANTENNA CABLES: AS SCHEDULED
   B. ANTENNA CONNECTORS: AS SCHEDULED
   C. CABLE HANGERS: INSTALLED AT MAXIMUM 4' SPACING
   D. GROUNDING KITS: AS SPECIFIED
3. INSTALLATION
   A. ANTENNA CABLE LENGTHS SHALL BE FIELD MEASURED PRIOR TO PURCHASE OF CABLE. INSTALLER SHALL NOTIFY VZW OF THE OVERALL LENGTH REQUIRED.
   B. CABLES SHALL BE LABELED IN ACCORDANCE WITH VZW SPECIFICATIONS.
   C. ALL OUTSIDE CABLE CONNECTIONS SHALL BE COVERED WITH WEATHERPROOFING TAPE.
   D. THE MINIMUM BENDING RADIUS FOR ALL ANTENNA CABLES SHALL BE AS SHOWN BELOW OR AS PER THE MANUFACTURER, WHICHEVER IS MORE CONSERVATIVE:

CABLE	IN AIR / CABLE TRAY	IN CONDUIT
1/2"	5"	10"
7/8"	10"	18"
1 5/8"	20"	28"

   E. CABLES SHALL BE INSTALLED WITH THE MINIMUM NUMBER OF BENDS. CABLES SHALL NOT BE LEFT UNTERMINATED IN THE FIELD.
   F. GROUNDING KITS – AFTER INSTALLATION OF GROUND STRAPS, THE CONNECTION SHALL BE MADE WEATHER TIGHT USING WEATHERPROOFING KITS AS IDENTIFIED ABOVE. GROUND PIGTAILS SHALL BE BROUGHT OUT IN THE DOWNWARD DIRECTION FROM THE CONNECTIONS TO THE ANTENNA CABLE WITHOUT ANY SHARP BENDS (MINIMUM BEND RADIUS 10") AND CONNECTION SHALL BE MADE TO GROUNDING SYSTEM.

3 ANTENNA NOTES AND REQUIREMENTS

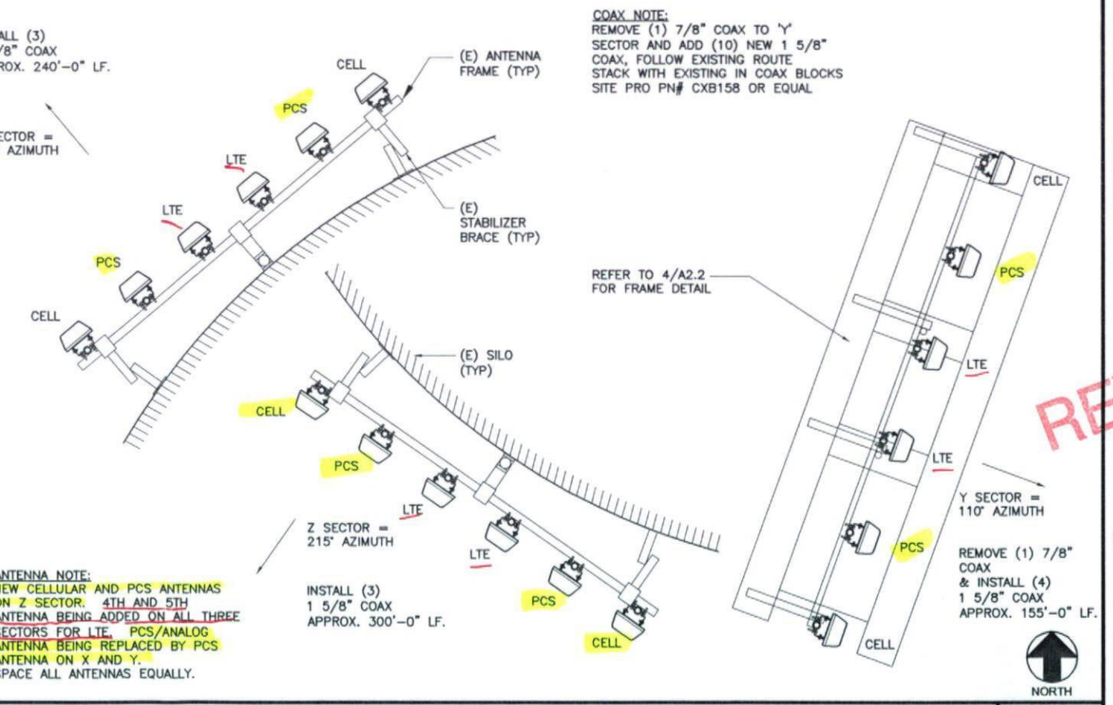

1 PROPOSED ANTENNA CONFIGURATION — SCALE: N.T.S.

M:\2011\Projects\Verizon Wireless LTE\DEN Lyons\CD\A22.dwg
PLOTTED Jan 03, 2012 AT 11:34am

verizon wireless
VERIZON WIRELESS SERVICES
3131 S. VAUGHN WAY, SUITE 550
AURORA, CO 80014
PHONE: 303.873.2800

PROJECT INFORMATION:

SITE NAME
DEN LYONS
SITE I.D.
215
SOUTHDOWN CEMENT PLANT
5134 UTE HIGHWAY
LONGMONT, CO 80503

REV:	DATE:	DESCRIPTION:	BY:
A	08/08/11	CD REVIEW	SSB
B	09/19/11	CLIENT COMMENTS	JTT
C	11/03/11	CLIENT COMMENTS	JTT
D	11/21/11	CLIENT COMMENTS	MF
0	12/03/11	CD ISSUE	SSB

PLANS PREPARED BY:

CSAi
CHARLES STECKLY ARCHITECTURE, Inc.
ARCHITECTURE – PLANNING – DESIGN
5935 SOUTH ZANG STREET, SUITE 280
LITTLETON, COLORADO 80127
OFFICE: 303.932.9974
FAX: 303.932.6561

LICENSURE NO:




DRAWN BY:	CHK:	APV:
JTT	TN	CS

CONSULTANT:



SHEET TITLE:
ANTENNA PLAN & RF DATA

SHEET NUMBER:
A2.2

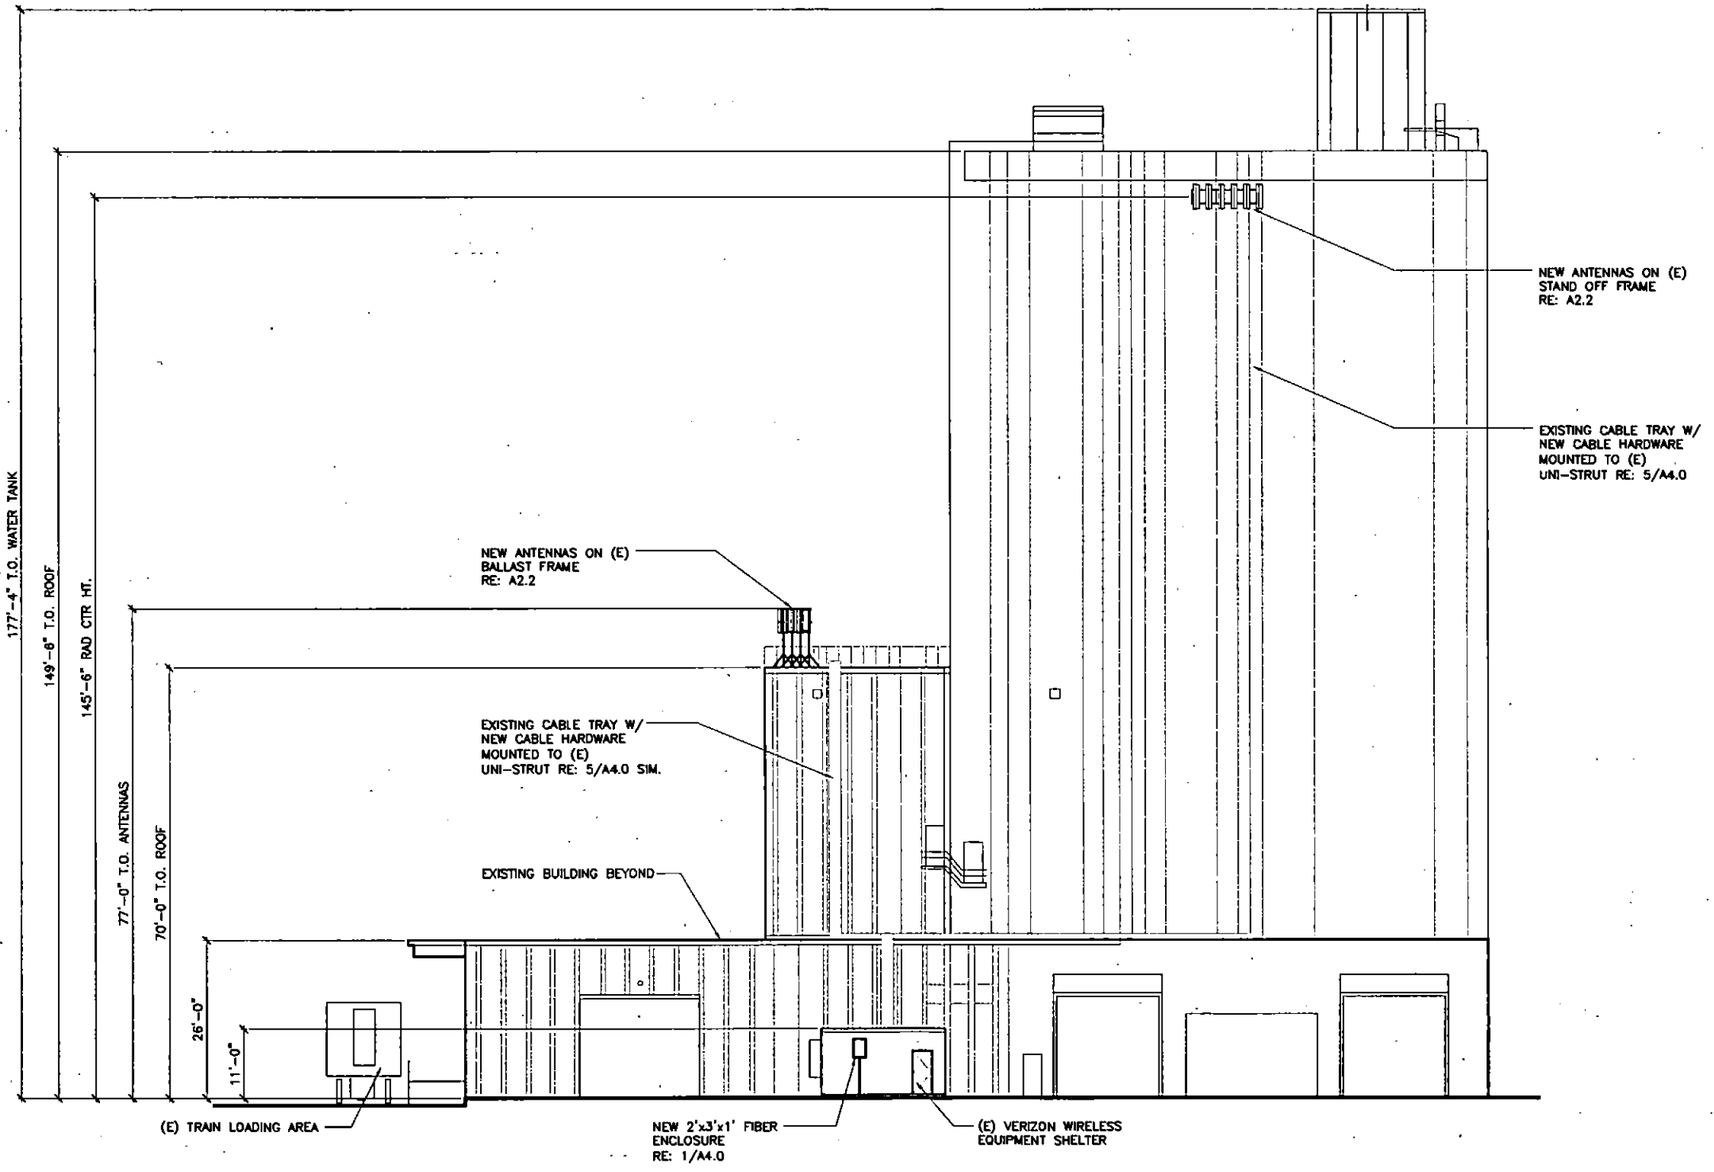

1 NORTH ELEVATION

SCALE: 3/32" = 1'-0"

12' 6' 0 12'

M:\2011\Projects\Verizon Wireless LTE\DEN Lyons\CDA30.dwg
PLOTTED Jan 03, 2012 AT 11:34am

verizon wireless

VERIZON WIRELESS SERVICES
3131 S. VAUGHN WAY, SUITE 550
AURORA, CO 80014
PHONE: 303.873.2800

PROJECT INFORMATION:

SITE NAME
DEN LYONS
SITE I.D.
215
SOUTHDOWN CEMENT PLANT
5134 UTE HIGHWAY
LONGMONT, CO 80503

REV:	DATE:	DESCRIPTION:	BY:
A	08/09/11	CD REVIEW	SSB
B	09/19/11	CLIENT COMMENTS	JTT
C	11/03/11	CLIENT COMMENTS	JTT
D	11/21/11	CLIENT COMMENTS	MF
0	12/03/11	CD ISSUE	SSB

PLANS PREPARED BY:

CSAi
CHARLES STECKLY ARCHITECTURE, Inc.
ARCHITECTURE - PLANNING - DESIGN
5935 SOUTH ZANG STREET, SUITE 250
LITTLETON, COLORADO 80127
OFFICE: 303.932.9974
FAX: 303.932.6501

LICENSURE No.

LICENSED ARCHITECT CHARLES N. STECKLY JAN 03 2012 No. 202602 STATE OF COLORADO


DRAWN BY: JTT CHECKED BY: CS

CONSULTANT:

REVIEWED
JAN 18 2012
BOULDER COUNTY
BUILDING DIVISION

SHEET TITLE:
ELEVATION

SHEET NUMBER:
A3.0

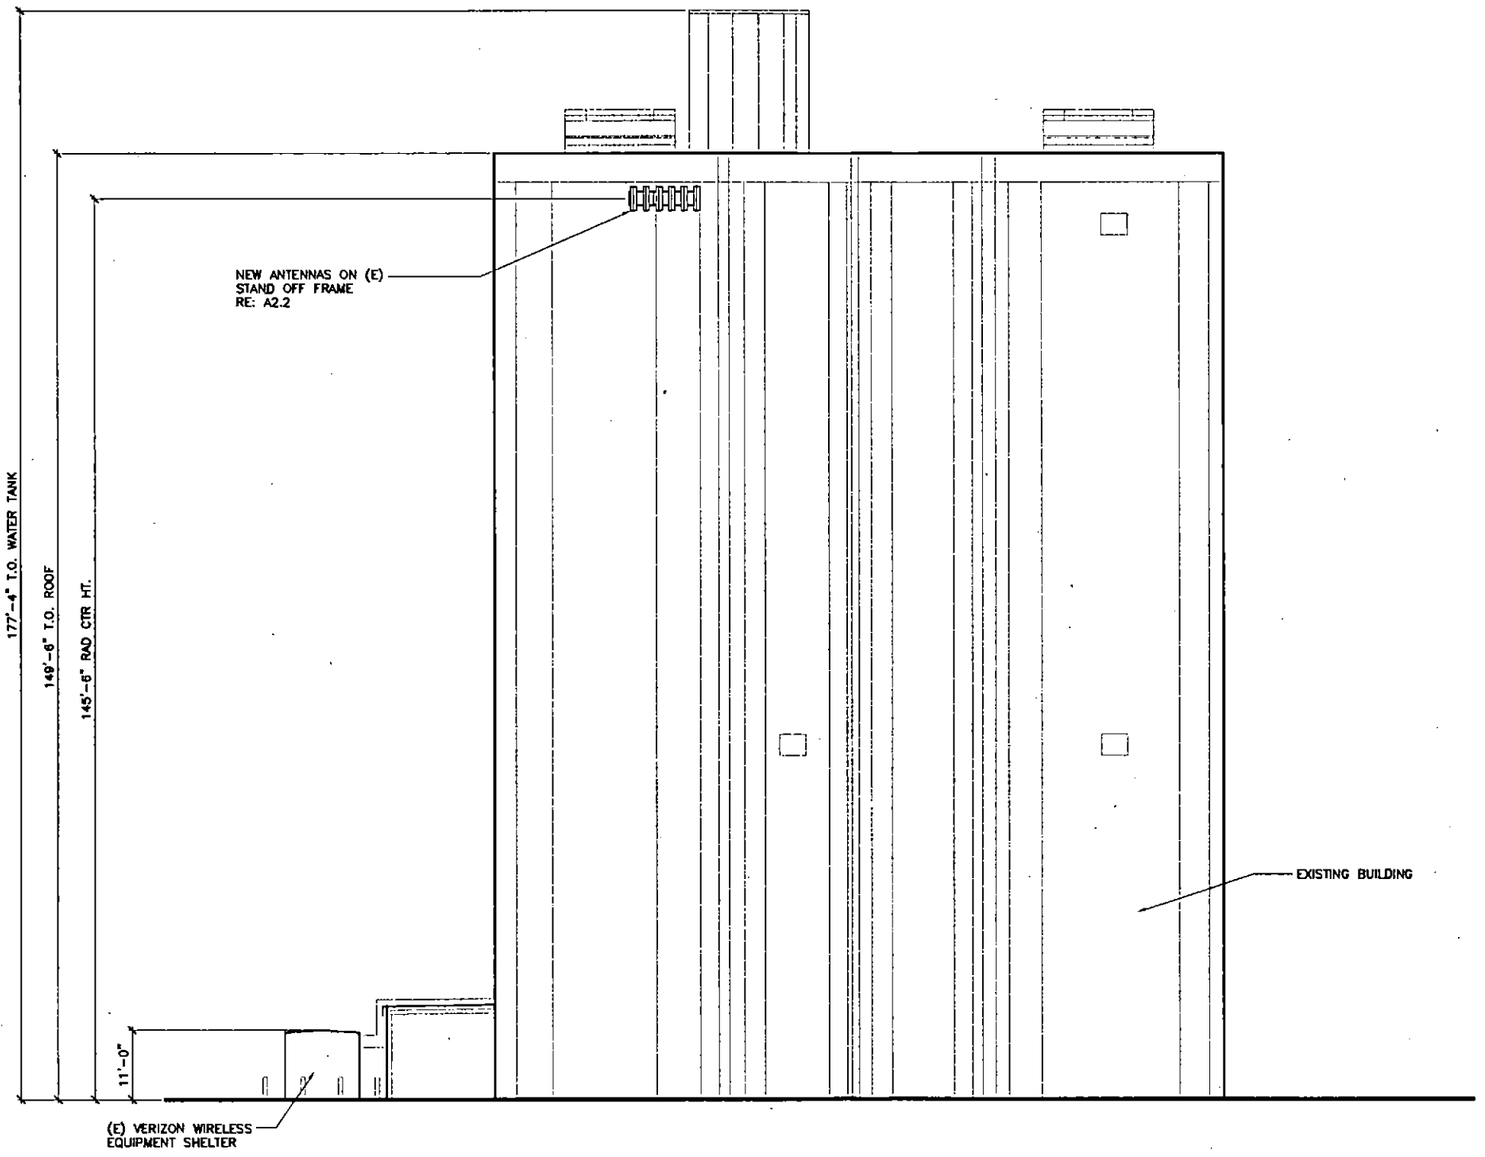

1 WEST ELEVATION

SCALE: 3/32" = 1'-0"

12' 6' 0 12'

verizon wireless
VERIZON WIRELESS SERVICES
3131 S. VAUGHN WAY, SUITE 550
AURORA, CO 80014
PHONE: 303.873.2800

PROJECT INFORMATION:

SITE NAME
DEN LYONS
SITE I.D.
215
SOUTHDOWN CEMENT PLANT
5134 UTE HIGHWAY
LONGMONT, CO 80503

REV:	DATE:	DESCRIPTION:	BY:
A	08/08/11	CD REVIEW	SSS
B	09/19/11	CLIENT COMMENTS	JTT
C	11/03/11	CLIENT COMMENTS	JTT
D	11/21/11	CLIENT COMMENTS	MF
0	12/23/11	CD ISSUE	SSS

PLANS PREPARED BY:

CSAi
CHARLES STECKLY ARCHITECTURE, Inc.
ARCHITECTURE – PLANNING – DESIGN
5935 SOUTH ZANG STREET, SUITE 280
LITTLETON, COLORADO 80127
OFFICE: 303.932.9974
FAX: 303.932.8581

LICENSURE NO:

LICENSED ARCHITECT
CHARLES N. STECKLY
JAN 03 2012
No. 202802
COLORADO

DRAWN BY: JTT | CHK'D / APV'D: CS


CONSULTANT:

REVIEWED
JAN 18 2012
BOULDER COUNTY
BUILDING DIVISION


SHEET TITLE:
ELEVATION

SHEET NUMBER:
A3.1

M:\2011\Projects\Verizon Wireless\LITE\DEN Lyons\CD\A3.1.dwg
PLOTTED Jan 03, 2012 AT 11:34am

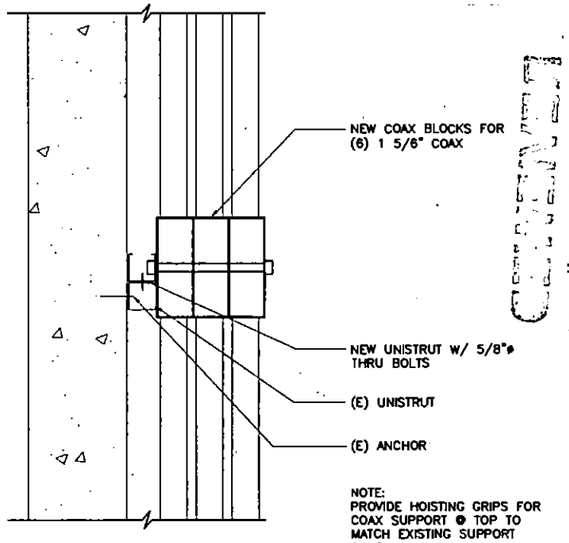


A-A

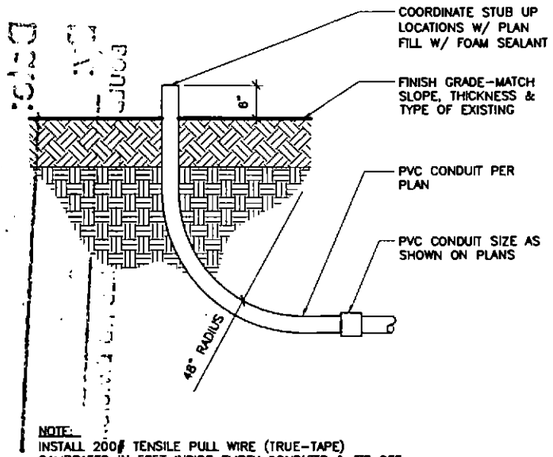


NOTE:
INSTALL 200# TENSILE PULL WIRE (TRUE-TAPE) CALIBRATED IN FEET INSIDE EMPTY CONDUITS & TIE OFF AT EACH END.

3 CONDUIT DETAIL — SCALE: N.T.S

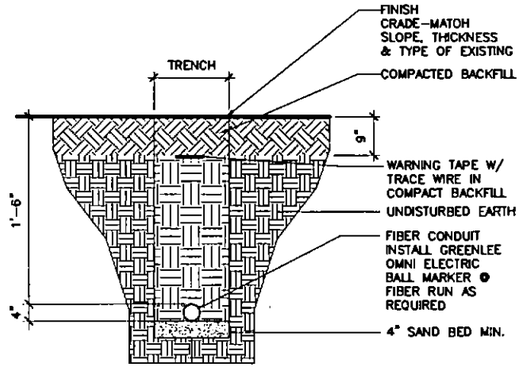


NOTES:
1. INSTALL ALL UNDERGROUND UTILITIES PER LOCAL UTILITY REQUIREMENTS.
2. LOCATE ALL UNDERGROUND UTILITIES PRIOR TO TRENCHING / EXCAVATION.
3. COORDINATE SIZE AND TYPE WITH LOCAL UTILITY COMPANIES REQUIREMENTS.
4. REFER TO ELECT PLAN FOR EXACT SIZE AND LOCATION.
5. COMPACT BACKFILL TO 95% PROCTOR DENSITY AT ALL DRIVEWAY OR HARD SURFACED AREAS. COMPACT TO 90% PROCTOR DENSITY ALL OTHER AREAS UNLESS NOTED OTHERWISE, REFER TO GEOTECHNICAL REPORT.
6. BACKFILL AND SAND BED NOT REQ'D WHEN BORING.


2 TRENCH DETAIL — SCALE: N.T.S.

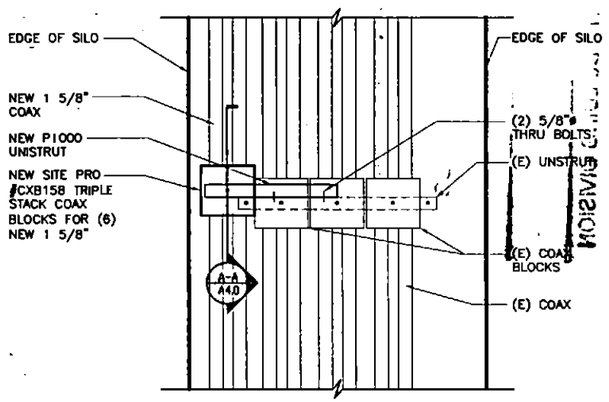

5 CABLE TRAY DETAIL — SCALE: N.T.S

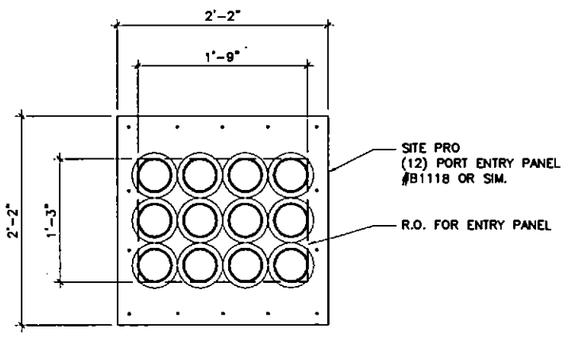

4 NEW ENTRY PORT DETAIL — SCALE: N.T.S

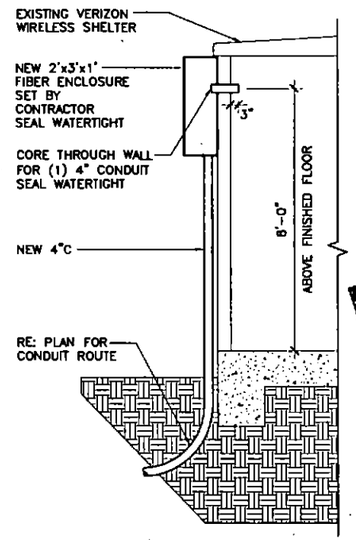

1 SECTION AT FIBER ENCLOSURE — SCALE: N.T.S.

verizon wireless
VERIZON WIRELESS SERVICES
3131 S. VAUGHN WAY, SUITE 550
AURORA, CO 80014
PHONE: 303.873.2800

PROJECT INFORMATION:

SITE NAME
DEN LYONS
SITE I.D.
215
SOUTHDOWN CEMENT PLANT
5134 UTE HIGHWAY
LONGMONT, CO 80503

REV:	DATE:	DESCRIPTION:	BY:
A	08/08/11	CD REVIEW	SSB
B	09/19/11	CLIENT COMMENTS	JTT
C	11/03/11	CLIENT COMMENTS	JTT
D	11/21/11	CLIENT COMMENTS	MF
0	12/03/11	CD ISSUE	SSB

PLANS PREPARED BY:
CSAi
CHARLES STECKLY ARCHITECTURE, Inc.
ARCHITECTURE – PLANNING – DESIGN
5935 SOUTH ZANG STREET, SUITE 250
LITTLETON, COLORADO 80127
OFFICE: 303.932.9974
FAX: 303.932.8581

LICENSURE No:

CHARLES N. STECKLY
JAN 03 2012
No. 202802
STATE OF COLORADO

DRAWN BY: JTT | CHK'D: JTN | APV'D: CS

CONSULTANT:

REVIEWED
JAN 03 2012
BOULDER COUNTY
BUILDING DIVISION

SHEET TITLE:
DETAILS

SHEET NUMBER:
A4.0

\\Server1\projects\2011\Projects\Verizon Wireless LTE\DEN Lyons\CD\A40.dwg
PLOTTED Jan 03, 2012 AT 1:35pm