



THE STATE

OF WYOMING

JIM GERINGER
GOVERNOR

Department of Environmental Quality

Herschler Building • 122 West 25th Street • Cheyenne, Wyoming 82002

ADMINISTRATION (307) 777-7758 FAX 777-7682	ABANDONED MINES (307) 777-6145 FAX 634-0799	AIR QUALITY (307) 777-7391 FAX 777-5616	INDUSTRIAL SITING (307) 777-7368 FAX 777-6937	LAND QUALITY (307) 777-7756 FAX 634-0799	SOLID & HAZARDOUS WASTE (307) 777-7752 FAX 777-5973	WATER QUALITY (307) 777-7781 FAX 777-5973
--	---	---	---	--	---	---

Mountain Cement Company
Attn: Steve Goodrich
5 Sand Creek Road
Laramie, WY 82070

297C
298C
299C
300C
604(s)
605(s)
648(s)
658(s)

RE: 1997-98 Reclamation Performance Bonds for Mountain Cements Non Coal Permits

Dear Steve,

Please find attached the reclamation performance bond table constructed from multiple telephone calls, correspondence, etc. The Land Quality Division (LQD) has been working with you, and previously Frank Plummer, to bring the issue of appropriate bond amounts for the individual permits to resolution since the annual inspections conducted in June of 1997. The LQD believes that both parties are now in agreement with the amounts listed on the attached table. If this is not the case please notify me immediately. My next step, should I not hear from you, is to write letters for the Director of the Department of Environmental Quality, noting the appropriate increases and decreases. If I do not hear from you by January 25, 1999, I will move forward with this effort.

Please note that this process begins again with the submittal of the 1999 annual reports. Should you have any questions, or if you find the attached table in error, please call me at (307) 777-7047.

Sincerely,


Georgia A. Cash
District I Supervisor
Land Quality Division

Enclosure

cc: 297C, 298C, 299C, 300C, 604s, 605s, 648s, and 658
Joseph Smith, LQD

1997-98 Annual Reports for the following permits:

297C recieved March 2, 1998
 298C, 299C, 300C received March 27, 1998
 299C received March 27, 1998
 300C received March 27, 1998
 604s received July 13, 1998
 605s received August 28, 1998
 648s received October 5, 1998
 658 received March 2, 1998

Bonding Issues

1997-98 Reclamation Performance Bond Estimates ¹				
	Bond In Place	MC Estimate	LQD Estimate	Increase/Decrease
297C	\$75,000.00	\$14,500.00	\$14,500.00	(-) \$60,500.00
298C	\$246,239.00	\$286,800.00	\$286,800.00	(+) \$40,561.00
299C	\$44,000.00	\$25,300.00	\$25,300.00	(-) \$18,700.00
300C	\$125,000.00	\$108,100.00	¹ \$108,100.00	(-) \$16,900.00
604s	\$34,470.00	\$35,700.00	² \$35,700.00	(+) 1,230.00
605s	\$75,000.00	\$75,200.00	³ \$75,200.00	(+) \$200.00
648s	\$115,200.00	\$106,600.00	⁴ \$106,600.00	(-) \$8,600.00
658	\$22,000.00	\$48,900.00	\$48,900.00	(+) \$26,900.00
Totals	\$736,909.00		\$701,100.00	(-) \$44,909.00

1. *Please note that many of these bond estimates are now approaching a year old and may or not be adequate.*

¹Revised 8/6/98, See 12/29/98 (also see MCC letter dated 12/1/98)

²Revised 10/6/98 meeting agreed to 20% contingency

³Revised and agreed to via 10/27/98 responses from MCC, MCC included fence removal

⁴Revised 1/10/99, See MCC fax rec'd 1/7/99

Revised 1/10/99

From: Joseph Smith
To: LANDER.BWOOD
Date: 2/4/99 2:24pm
Subject: MCC 658 - Weaver

B. Hogg March 23, 1998 estimate:

Cost to remove Harney Creek crossing including concrete removal and disposal, removal and disposal of 2 - 48" culverts, removal of fill and reconstruction of the drainage floor = \$8,500

If you need anything else, let me know

Jody

THE STATE



OF WYOMING

JIM GERINGER
GOVERNOR



Department of Environmental Quality

Herschler Building • 122 West 25th Street • Cheyenne, Wyoming 82002

ADMINISTRATION (307) 777-7758 FAX 777-7682	ABANDONED MINES (307) 777-6145 FAX 634-0799	AIR QUALITY (307) 777-7391 FAX 777-5616	INDUSTRIAL SITING (307) 777-7368 FAX 777-6937	LAND QUALITY (307) 777-7756 FAX 634-0799	SOLID & HAZARDOUS WASTE (307) 777-7752 FAX 777-5973	WATER QUALITY (307) 777-7781 FAX 777-5973
--	---	---	---	--	---	---

September 14, 1998

Mountain Cement Company
Attn: Steve Goodrich
5 Sand Creek Road
Laramie, WY 82070

**RE: 1997-98 Annual Report Review of Reclamation Performance Bond for Permits
297C, 298C, 299C, 300C, 604s, 605s, and 658, Mountain Cement Company**

Dear Steve,

The Land Quality Division (LQD) has completed the reclamation performance bond reviews for the above mentioned permits. As you are aware, the LQD has been working with Mountain Cement Company (MCC) for over two years to resolve the bonding issues for the various permits. I would like to complete this task by the close of 1998. I have enclosed for your review an updated table showing MCC's bond estimate, LQD's bond estimate and the bond presently in place for each permit.

Please review this information and contact me with any concerns you may have regarding these numbers. Thank you in advance for your cooperation. I can be reached at (307) 777-7047.

Sincerely,

Georgia A. Cash
District I Supervisor
Land Quality Division

Enclosures: 1997-98 Reclamation Performance Bond Review for 605s
1997-98 Reclamation Performance Bond Review Table

ec: Deanna Hill, Adjudication Specialist

Memorandum

To File: Mountain Cement, Permit 605s
From: Bill Hogg *WH*
Date: September 10, 1998
Subject: Bond estimate of 1998 Annual Report

On August 28, 1998 Land Quality Division (LQD) received 1998 Annual Report for the Mountain Cements Permit 605s. The bond estimate contained in that Annual Report contained the following information:

- 1) A total of 25.4 acres have been disturbed. Zero acres are projected to be disturbed during the next report period.
- 2) No acres have been reclaimed on the permit area.
- 3) The annual report map shows a line x marking that might indicate a fence area or a disturbance line. If the marking is a disturbance line the disturbed size may be understated. If the marking indicates a fence then costs should be included for its removal.
- 4) 8,540 yards of topsoil have been salvaged that will be used on 25.4 acres now disturbed. This will average 2.5 inches of cover the disturbance. Topography of the area would seem to indicate that more topsoil was available. It is hoped that the reported amounts are misstated as reclamation would be effected with such a small amount.
- 5) The Mountain Cement's bond estimate is \$72,450.00 and the bond in place is \$75,000.00.

The LQD bond estimate is \$75,000.00

Seeding	25.4 acres	@	537.00/acre	=	\$13,640 .00
Topsoil	8,540 yards	@	0.54/yard	=	\$ 4,612.00
Backfilling	84,188 yards	@	0.50/yard	=	\$42,094.00
Grading	25.4 acres	@	28.98/acre	=	<u>\$ 736.00</u>
			Sub-total	=	\$61,082.00
			20 % contingencies	=	<u>\$12,216.00</u>
			LQD Estimate		\$73,298.00

MEMORANDUM

TO: Permits 297C, 298C, 299C, 300C, 604s, 605s, and 658, Mountain Cement Company

FROM: Georgia Cash, District I Supervisor *GC*

DATE: September 13, 1998

SUBJECT: 1997-98 Annual Report Review, Reclamation Performance Bonds for 297C, 298C, 299C, 300C, 604s, 605s, and 658, Mountain Cement Company

Introduction

The Land quality Division (LQD) has been discussing the bonding level for many of the Mountain Cement Company (MCC) permits for the past three years. It was agreed between the LQD and MCC to address this issue during 1997; however, with a change in personnel at MCC, addressing this issue was delayed until this year. The above annual reports were received and a reclamation performance bond review was done. The annual report review for 605s will be sent in early October. Please note the reclamation performance bond review was completed and a copy of the review is attached. Below is a summary of this information.

1997-98 Reclamation Performance Bond Estimates				
	Bond In Place	MC Estimate	LQD Estimate	Increase/Decrease
297C	\$75,000.00	\$6,670.00	\$14,500.00	(-) \$60,500.00
298C	\$246,239.00	\$196,500.00	\$286,800.00	(+) \$40,561.00
299C	\$44,000.00	\$20,260.00	\$25,300.00	(-) \$18,700.00
300C	\$125,000.00	\$99,620.00	¹ \$165,700.00	(+) \$40,700.00
604s	\$34,470.00	\$35,634.00	\$38,700.00	(+) \$4,230.00
605s	\$75,000.00	\$72,450.00	\$73,300.00	(-) \$1,700.00
658	\$22,000.00	\$39,752.00	\$48,900.00	(+) \$26,900.00

¹Revised 8/6/98

THE STATE



OF WYOMING

JIM GERINGER
GOVERNOR



Department of Environmental Quality

Herschler Building • 122 West 25th Street • Cheyenne, Wyoming 82002

ADMINISTRATION (307) 777-7758 FAX 777-7682	ABANDONED MINES (307) 777-6145 FAX 634-0799	AIR QUALITY (307) 777-7391 FAX 777-5616	INDUSTRIAL SITING (307) 777-7368 FAX 777-6937	LAND QUALITY (307) 777-7756 FAX 634-0799	SOLID & HAZARDOUS WASTE (307) 777-7752 FAX 777-5973	WATER QUALITY (307) 777-7781 FAX 777-5973
--	---	---	---	--	---	---

April 27, 1998

Mountain Cement Company
Attn: Steve Goodrich
5 Sand Creek Road
Laramie, WY 82070

RE: 1997-98 Annual Report Reviews for Permits 297C, 298C, 299C, 300C and 658, Mountain Cement Company (MCC)

Dear Steve,

The Wyoming Department of Environmental Quality (WDEQ)/ Land Quality Division (LQD) has reviewed the above referenced annual reports. Due to budget constraints and staff time, the review primarily focused on reclamation activities at each of the above permits and the adequacy of each of the permits reclamation performance bond. As you know, the bonding issue has been previously discussed between LQD and MCC.

Please peruse the enclosed reviews and, as always, should you have any questions, please do not hesitate to call me at (307) 777-7047.

Sincerely,

Georgia A. Cash
District I Supervisor
Land Quality Division

Enclosures

cc: Bill Hogg, LQD, w/enclosures

MEMORANDUM

TO: Permits 297C, 298C, 299C, 300C and 658, Mountain Cement Company

FROM: Georgia Cash, District I Supervisor GAC

DATE: April 26, 1998

SUBJECT: 1997-98 Annual Report Reviews for Permits 297C, 298C, 299C, 300C and 658, Mountain Cement Company

1997-98 Annual Report Review for 297C, 298C, 299C, 300C, and 658

297C received March 2, 1998

298C, 299C, 300C received March 27, 1998

658 received March 2, 1998

Introduction

Due to budget constraints and staff time, the focus of the annual report reviews for the above permits was primarily reclamation (the amount being completed) and the adequacy of reclamation performance bond.

The Land quality Division (LQD) has been discussing the bonding level for many of the Mountain Cement Company (MCC) permits for the past two years. It was agreed between the LQD and MCC to address this issue during 1997; however, with a change in personnel at MCC, addressing this issue was delayed until this year. The above annual reports were received and a reclamation performance bond review was done. Below is a summary of this information, the entire reviews are attached.

1997-98 Reclamation Performance Bond Estimates				
	Bond In Place	MC Estimate	LQD Estimate	Increase/Decrease
297C	\$75,000.00	\$6,670.00	\$14,500.00	(-) \$60,500.00
298C	\$246,239.00	\$196,500.00	\$286,800.00	(+) \$40,561.00
299C	\$44,000.00	\$20,260.00	\$25,300.00	(-) \$18,700.00
300C	\$125,000.00	\$99,620.00	\$215,100.00	(+) \$90,100.00
658	\$22,000.00	\$39,752.00	\$48,900.00	(+) \$26,900.00

Permit 297C, Red Mountain Gypsum Quarry

This permit was last mined in 1988. The mineral mined was gypsum. The total disturbance of 26 acres was reclaimed in 1995. The permitted acreage is on private surface. MCC is requesting final bond release, via the annual report, for this site. This site was inspected in June of 1997. The vegetation had been reestablished with minor areas of erosion. Based on LQD's limited funds and staff availability, the LQD would recommend that this site be allowed two additional years of growth to demonstrate the ability of the vegetation to renew itself as outlined in the NonCoal Rules and Regulations, Chapter III, Section 2., (d)(vi). MCC may request final bond release for this site in 2000.

Further, I have enclosed a guidance document which outlines, at a minimum, the information required to initiate a final bond release. The LQD will allow for a bond reduction for this site as noted in the above table.

298C, Piper Quarry

This permit is actively being mined. The permit was issued in 1975 with 337 acres and today encompasses 3571.8. A number of amendments, the incorporation of 319C into this permit, and a recent 2160 acre amendment comprise the 3571.8 acres. The mineral being mined is limestone. To date, 414.4 acres have been disturbed, with approximately 276.1 acres being reclaimed. The LQD has been working with MCC to give final bond release on 186 acres of which approximately 32 acres were disturbed. These are two separate areas, one being in the N1/2 of Section 13 owned by Cindy Avery and the other in area in the SW1/4 of Section 13 owned by Dick Strohm. This bond release is being processed under TFN 3 3/190.

MCC is potentially interested in releasing what was known as the "original" acreage for Permit 298C. In accordance with discussions between Steve Goodrich and I, this area would be eligible for final bond release in 1999. This area encompasses 337 acres, with approximately 100 acres of this being disturbed. This area has a road running north/south that MCC was interested in retaining in the permit. The LQD has discussed this with MCC and the options available to MCC are as follows: 1) retain the mined area within their permit; or 2) release all of the permitted lands in that portion of the permit. The LQD has no way in which to justify leaving the road permitted after final release of these lands, therefore the road will not be allowed to remain permitted upon release of these lands.

A reclamation performance bond estimate was done for this permit based on the information supplied by the operator. The LQD estimate is \$286,800.00 versus MCC's estimate of \$246,239. The bond in place is presently \$196,500.00. The LQD is recommending an increase of \$40,561.00. The review for these figures is attached.

299C, Tuffa Pit

This permit encompasses 423.8 acres. Acres which have been affected by mining are 69.2, of which, 61 have been reclaimed. The mineral being mined is sand and gravel. MCC wishes to explore the potential for release of some of these lands. This issue will be discussed in the future at MCC's request.

The reclamation performance bond was reviewed. The LQD review estimates the bond to be place at \$25,300.00. This would be a bond reduction in the amount of \$18,700.00, as the present bond in place is \$44,000.00.

300C, Monolith Shale Quarry

Permitted lands for this site encompass 286.67 acres. The mineral mined at this site is shale. A total of 122 acres have been disturbed to date, with no reclamation. This site has been discussed with Frank Plummer and now Steve Goodrich. The LQD believes that MCC is failing to reclaim this site contemporaneously as discussed in the NonCoal Rules and Regulations. The LQD requests that MCC remedy this situation. A meeting will be held on May 28, 1998 with Stan Barnard, AML, Steve Goodrich, MCC, and Georgia Cash, LQD to discuss this issue and develop a plan for resolving the situation. (AML will be involved as prelaw mining was done at this site.)

The LQD conducted a reclamation performance bond review. The LQD bond estimate for this site is \$215,100.00. The present bond for this site is \$125,000.00. This represents a \$90,100.00 increase.

Permit 658, Weaver Limestone Quarry

Permitted lands for this permit include 1372.5 acres. The mineral being mined is limestone. This permit is a new permit, approved February 29, 1996. The activity in 1996 was limited and in 1997 mining began. To date 19.2 acres are being reported disturbed with an additional 15 projected to be disturbed for a total of 34.2. No reclamation has been completed to date and no reclamation activities are scheduled for this coming report period. This is not unusual since this is a newly opened mining area.

The LQD conducted a reclamation performance bond review. The LQD bond estimate for this site is \$48,900.00. The present bond for this site is \$22,000.00. This represents a \$26,900.00 increase.

Memorandum

To File: Mountain Cement, Permit No. 658, Weaver
From: Bill Hogg *WHE*
Date: March 23, 1998
Subject: Bond Estimate

The following information was obtained from the 1998 Permit 658, Annual Report:

- 1) 19.2 acres of total disturbance occurred on the permit area.
- 2) 15.0 acres are projected for next report period.
- 3) 13,000 yds. of topsoil have been stored in three piles
- 4) 15,000 yds. of overburden have been stored in one pile for reclamation.
- 5) No reclamation has been yet completed.
- 6) The current bond held for this disturbance is \$22,000.00.
- 7) Mountain Cements current bond estimate is \$39,752.00, an increase of \$17,752.00.
- 8) The Annual Report disturbance map indicates that 5,400 LF of roads have been constructed and a highwall of 1,200 LF has been created by mining.

The following information was obtained from the Permit No. 658 files:

- 1) This permit was last inspected July 21, 1997 by Georgia Cash. An earlier inspection had identified compliance issues, lack sediment control and topsoil salvage and storage issues, that were corrected by this inspection.

Mountain Cement Bond Estimate

Backfill	15,000 yds	@	.49/yd.	=	\$ 7,350.00
Culvert removal	3 each	@	300/ea.	=	\$ 900.00
Crossing removal				=	\$ 8,500.00
* (Inc. 2 culverts)					
Scarification roads	5.2 acres	@	28.29/ac.	=	\$ 200.00
Topsoil replacement	13,000 yds	@	.50/yd.	=	\$ 6,500.00
	5.26 acres	@	200/ac.	=	\$ 1,040.00
Seeding & mulch	34.2 acres	@	525/ac.	=	\$17,995.00
					\$42,485.00
		15%		=	\$ 6,372.50
					\$48,857.50

* The cost of removal of Harney Creek crossing including concrete removal and disposal, removal and disposal of 2 48" culverts, and removal of fill and reconstruction of the drainage floor.

LQD Bond Estimate

The Mountain Cement estimate varies from LQD's estimate with regard to Harney Creek crossing removal and reconstruction. Also, it is requested that MCC furnish more information in the future on highwall length and depth.

The LQD bond estimate is \$48,900.00 and represents an **increase of \$26,900.00** from the present bond held in the amount of \$22,000.00.



MOUNTAIN
CEMENT COMPANY

5 Sand Creek Rd.
Laramie, Wyoming 82070
(307) 745-4879

GAC
File — 2/14

February 27, 1998

Ms. Georgia Cash
Wyoming Department of Environmental Quality
Land Quality Division
Herschler Bldg. - 3rd Floor
122 West 25th Street
Cheyenne, WY 82002



RE: Annual Reports, Permit No. 658 and Permit No. 297C

Dear Ms. Cash:

I have enclosed annual mine reports for Mountain Cement Company's Weaver Limestone Quarry, Permit No. 658, and Red Mountain Gypsum Quarry, Permit No. 297C. The 658 report year ends February 28, 1998, and the 297C report year ends March 25, 1998.

Please call me if you have questions regarding either of these reports, or require additional information.

Sincerely,

Steve Goodrich
Environmental and Safety Manager

Enclosures

**MOUNTAIN CEMENT COMPANY
PERMIT 658-WEAVER LIMESTONE QUARRY**

**ANNUAL REPORT
AND
MINE AND RECLAMATION PLANS**

MARCH 1, 1997-FEBRUARY 28, 1998

SUBMITTED TO:

**WYOMING DEPARTMENT OF ENVIRONMENTAL QUALITY
LAND QUALITY
HERSCHLER BUILDING
CHEYENNE, WYOMING**

PREPARED BY:

**MOUNTAIN CEMENT COMPANY
5 SAND CREEK ROAD
LARAMIE, WY
(307) 745-4879**



TABLE OF CONTENTS

ANNUAL REPORT FORM	1
Introduction	4
Mine Plan	4
Past Mining Activities	4
Probable Future Mining Activities	4
Reclamation Plan	4
Past Reclamation Activities	4
Future Reclamation	4
Estimated Reclamation Costs	4

TABLES

TABLE I - Description of Red Mountain Gypsum Quarry lands, 297C. (No acreage projected to be disturbed during the upcoming report period)

5

TABLE II - Estimated Reclamation Costs through March 25, 1998 (No Projected Disturbances for the 1998-1999 Report Period), Red Mountain Gypsum Quarry, 297C

6

Table III - Seed mixture for flat areas applied March, 1995, Red Mountain Gypsum Quarry, 297C (DRILL SEEDED)

7

Table IV - Seed mixture for sloped areas applied March, 1995, Red Mountain Gypsum Quarry, 297C (HYDROSEDED)

8

APPENDIX

MAPS

Annual Report Map, March 1, 1997 - Feb. 28, 1998



TABLE OF CONTENTS

ANNUAL REPORT FORM	3
MINE AND RECLAMATION PLAN SUMMARY	7
Introduction	7
Mine Plan	7
Past mining Activities	7
Probable Future Mining Activities	
Reclamation Plan	7
Past Reclamation Activities	8
Future Reclamation Activities	8
Estimated Reclamation Costs	8

TABLES

TABLE I - Description of Weaver Quarry lands. (Includes acreage projected to be disturbed during the upcoming report period) 9

TABLE II - Estimated Reclamation Costs for Disturbances through February 28, 1998 and Projected Disturbances for the 1998-1999 Report Period, Weaver Quarry, Permit No. 658. 10

APPENDIX

Annual Report Map, March 1, 1997 - February 28, 1998



Land Quality Division
Districts I, II & III
Required Annual Report Information

FOR LARGE MINING OPERATIONS

RE: Wyoming Environmental Quality as Amended §35-11-411, Annual Report

I.

A.	Name of Permittee.	MOUNTAIN CEMENT CO.
B.	Address.	5 SAND CREEK ROAD
		LARAMIE, WY 82070
C.	Mining Permit Number	658
D.	Date of Permit Issuance (and any Amendment).	See attached
E.	Mineral(s) Mined.	LIMESTONE
F.	State and Federal Mineral Lease Numbers.	NONE

II. Time period covered by the report. **MARCH 1, 1997 TO FEBRUARY 28, 1998**

III. Mining:

- (a) Tabulate acreage disturbed (by pits, roads, facilities, etc.) during the report period and illustrate on map.
5.2 acres disturbed in 1997 for an entrance road
14 acres disturbed in 1997 for pit and surrounding area
- (b) Tabulate acreage affected to date by years and illustrate on map.
2.6 acres disturbed as of February 1997
2.6 acres disturbed after February 1997
14 acres disturbed during mining activities in 1997
19.2 acres total since mine start-up
- (c) Tabulate all topsoil stockpile volumes, dated of stockpiling and illustrate on map.
2,300 CY-Road
10,700 CY-Mining Area
- (d) Tabulate all out-of-pit spoil volumes, dates of placement and illustrate on map.
15,000 CY overburden stockpiled on north end of permit area (800 CY 1997)
15,000 CY total since mine start-up
- (e) Tabulate quantity of commodity mined by years.
124,376 tons limestone mined 1997
124,376 tons limestone since mine start-up
- (f) Described any new construction during the report period and illustrate on map; include:



1. Shop facilities, erection sites. **None**
2. Roads. **Approximately 5600 feet of road has been constructed to the site.**
3. Culverts. **(2) ___" culverts on Harney Creek tributaries. (5 culverts total on permit area)**
4. Diversion ditches, collector ditches, interceptor ditches, etc. **None**
5. Sediment ponds, containment ponds. **None**
6. Monitoring sites. **None**

g) Describe any environmental problem areas and a proposed plan for mitigating them – illustrate on map; include:

1. Pit stability problems. **None**
2. Subsidence. **None**
3. Accidental water discharge, dam failure, etc. **None**
4. Slumping or sliding. **None**
5. Revegetation problem areas. **None**

4. Reclamation:

A. Tabulate the acreage completed during the report period and illustrate on map. Distinguish between: **None completed this report period.**

1. Backfilled, graded, and contoured. Including date of approval for coal permits.
2. Topsoiled.
3. Seeded.
4. Reseeded.
5. Indicate where special construction or reclamation practices were used such as for sand bodies or alluvial material.

B. Submit a map showing the reconstructed contours. The map must be the same scale and contour interval as the PMT map in the approved permit. **None completed.**

C. Tabulate acreage reclaimed (seeded with permanent seed mix) to date by years and illustrate on map. **See "Annual Report Map".**

D. Describe reclamation procedures used during the report period: **No reclamation occurred during this report period.**

1. Depth of topsoil applied. Indicate whether from stockpile or directly applied.
2. Type of seed is used for seeding during the report period.
3. Dates of seeding during the report period.
4. Seeding procedures used.



5. Rate of seed application.
6. Type and rate of any fertilizer applied.
7. Type and rate of mulch applied.
8. Rate of irrigation water applied.
9. Any deviations to the approved reclamation plan including, in addition to the items, above, changes to the contour or location of post mining features.

E. Describe results of previous revegetation efforts; include:

1. Types of seed that have germinated and are growing. **None**
2. Types of seed that are not growing successfully. **None**
3. Areas experiencing problems with weeds and weed types. **None**
4. Significant erosional problems. **None**
5. Areas of unsuitable overburden on the surface. **None**
6. Procedures used or proposed to correct these problems. **N/A**

F. Summarize the actual reclamation costs incurred during the report period. Costs should be itemized for each operation (i.e. grading, topsoil replacement, seeding, etc.) and for each type of disturbance (i.e. spoil, haul roads, facilities removal, etc.) on a per-acre basis. **None**

5. Describe in detail mining plans for the coming year including revised time schedules and all proposed deviations from previously approved plans. Acreages should be tabulated and illustrated on a map. **See Mine Plan report and Annual Report Map.**
6. Describe in detail reclamation plans for the coming year including revised time schedules and deviations from previously approved plans. Acreages should be tabulated and illustrated on a map. **See Reclamation Plan Report.**

NOTE:

On items 5 and 6 above, any proposed deviation from the approved mine and reclamation plan must be described in detail. The proposed mining and reclamation plans will be reviewed and the operator will be notified if further information is required. "Significant" deviations will require permit revision application (Form 11) and public notice pursuant to Chapter VII Section 2 of Land Quality Division Noncoal Regulations.



7. Describe in detail all monitoring activities during the report period, summarize the data, describe procedures to correct any noted problems and deviations from previously approved methods, including:

- A. Groundwater analyses. **None**
 - B. Surface water analyses and discharge data. **None**
 - C. Precipitation data. **None**
 - D. Subsidence monitoring. **None**
 - E. Overburden analyses. **None**
 - F. Topsoil quantities - compare calculated and actual. **N/A**
 - G. Vegetation data. **None**
 - H. Wildlife data. **None**
 - I. A map showing and identifying monitoring locations. **None**
8. Operator's Reclamation Performance Bond Estimate as required by Wyoming Statute §35-11-417. Reclamation cost estimates should be itemized in detail to reflect the actual estimated costs of reclaiming all lands which have been affected to date and those lands to be affected during the next report period. Costs must reflect procedures as specified in the approved mine and reclamation plan. The estimated cost of dismantling and disposal of all facilities and structures must be included. Salvage value will not be used to offset bonding requirements. Reclamation projected for the coming year will not be used to offset bonding requirements. Pit backfill costs must reflect actual yardages to be moved. Actual yardages to be moved will reflect the removal or placement of additional material to correct any deviations between the PMT map and the map submitted for part 4.(b). **See Table II**
9. Supply any additional information as requested by the Division related to:
- A. Notices of violation. **None**
 - B. Orders. **None**
 - C. Permit stipulations; and **None**
 - D. Other special conditions. **None**
10. All drill holes used for immediate developmental expansion of the advancing pit(s) shall be tabulated by location and depth and shown on the mining plan map. Pursuant to W.S. §35-11-404(e), all drill holes used for exploration shall be reported to the LQD Abandoned Drill Hole Program Supervisor and the State Engineer. **None**



INTRODUCTION

Mining operations continued at the Mountain Cement Company Weaver Quarry WDEQ/LQD Permit No. 658 during the past report period. The activity was located in the northwest corner of the permit area, as described in the Mine Plan.

MINE PLAN

The following mine plan describes the actual mining activities for the 1997-1998 report period, and likely future mining operations for the 1998-1999 report period at Mountain Cement Company's Weaver Limestone Quarry, Permit No. 658.

Past Mining Activities: The access road was completed, and the disturbed soil has been stockpiled on the east side of the road. Two stockpiles contain approximately 2,500 cubic yards of topsoil. Actual limestone quarrying began in the northwest corner of the affected area, consistent with the Mine Plan. Topsoil and overburden were placed in two separate piles in the northwest corner of the affected area, along the edge of the mining activity. About 11,000 cubic yards of topsoil and 15,000 cubic yards of overburden are contained in these stockpiles. Both stockpiles have been toe ditched. Limestone was removed from an area east of the western-most stockpile.

Future Mining Activities: Mountain Cement plans to continue mining the site through the next report period, following the Mine Plan closely as possible.

RECLAMATION PLAN

The following reclamation plan describes actual past reclamation and expected future efforts.



Past Reclamation Activities:

Reclamation has not yet been initiated at this mine site. 1997-1998 was the first year limestone was quarried at this site.

Future Reclamation Activities:

No reclamation is planned for the next report period. All future reclamation activities will follow the Reclamation Plan submitted with the permit application.

ESTIMATED RECLAMATION COSTS

Mountain Cement Company reclamation performance bond estimate for current disturbances and expected 1997-1998 report disturbances is detailed in Table II.



TABLE I - Description of Weaver Quarry lands. (Includes acreage projected to be disturbed during the upcoming report period)

LAND DESCRIPTION	ACRES
PERMIT AREA	1372.5
AFFECTED AREA	19.2
PROECTED DISTURBANCE FOR 1997-1998	15.0
LANDS REQUIRING AREA BOND COST	34.2
LANDS REQUIRING FULL INCREMENTAL BOND COST	34.2
LANDS REQUIRING PARTIAL INCREMENTAL BOND COST (Reseeding)	0
LANDS WITH REQUESTED FULL BOND RELEASE, > 2 YEARS	0
LANDS W/ APPROVED FULL BOND RELEASE	0.0
SUBTOTAL(INCREMENTAL BOND TOTAL)	34.2
NATIVE LANDS	1338.3
TOTAL OF BONDED, BOND RELEASED AND NATIVE LANDS	1372.5




TABLE II - Estimated Reclamation Costs for Disturbances through February 28, 1998 and Projected Disturbances for the 1998-1999 Report Period, Weaver Quarry, LQD Permit No. 658.

BOND TYPE		APPENDIX LQD, GL 12	AVERAGE ONE-WAY HAUL, ft	UNIT	UNIT COST \$/unit	TOTAL, \$
Area Bond	Backfill + Recontouring	A,B,C,D, E,E1,F,G	750	15,000 CY	5% Res Grd 0.49	7,350
Incremental Bond	Misc. Overburden Redist.	A-G, E1	N/A	CY		
	Demolition (culverts)	H-K	N/A	5 UNITS	300.00	1500
	Scarification or Ripping (Roads)	P, II	N/A	5.2 AC	28.98	200
	Topsoil Redist.	C, D	750	13,120 CY	0.50	6,560
	Seeding only	Q	N/A	5.26 AC	200.00	1,040
	Seed, Mulch, Prepare soil + Fencing	Q	N/A	34.2 AC 0 ft	525.00 1.70	17,995

Total Land Quality Bond Amount = \$22,000



SUBTOTAL	\$34,645
15% DEQ CONTINGENCY	<u>\$ 5,107</u>
TOTAL	\$39,752

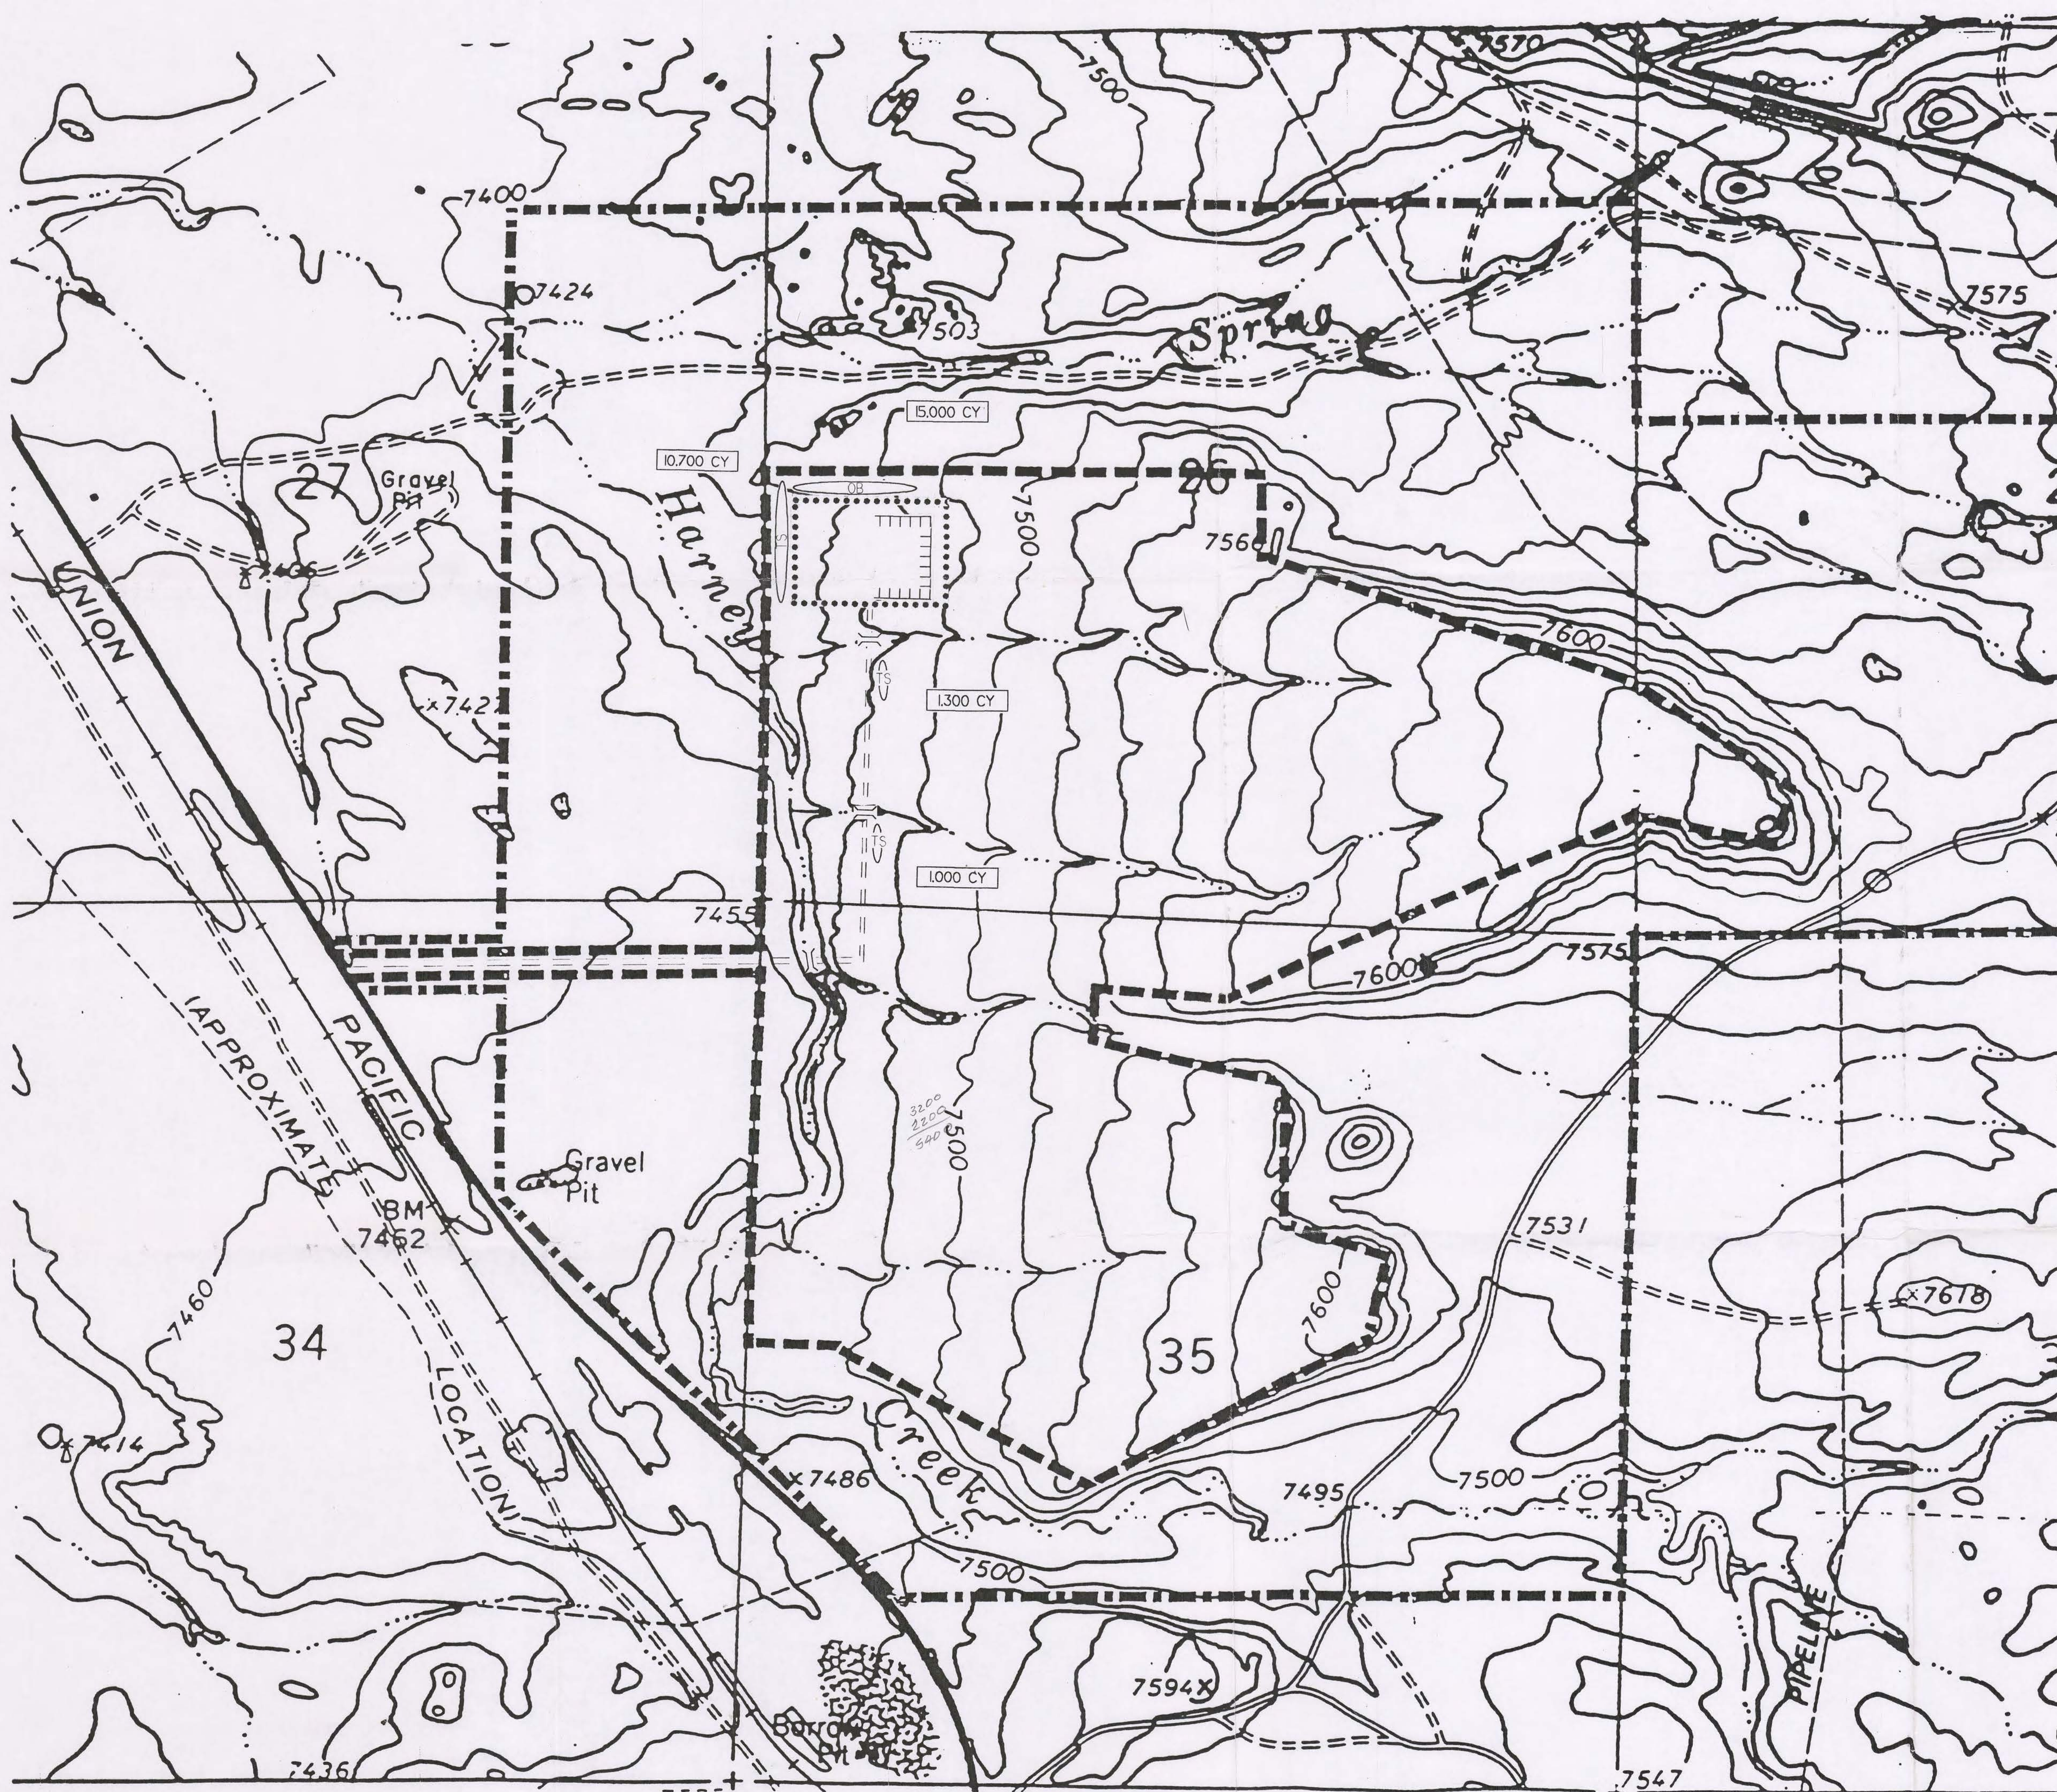

LEGEND	
TS	TOPSOIL STOCKPILE
OB	OVERBURDEN STOCKPILE
---	DISTURBED BOUNDARY
- - -	PERMIT BOUNDARY
- - -	AFFECTED AREA BOUNDARY
	PIT WALLS
	CULVERT
-x-	FENCE LINE



Annual Report Map	
WEAVER LIMESTONE QUARRY	
658	
March 1, 1997 to February 28, 1998	
Mountain Cement Company	
5 Sand Creek Rd	
Laramie, Wyoming	
(307) 745-4879	
SCALE 1" = 500'	
CONTOUR INTERVAL 20'	
Drafted 2/20/97 DL Revised 2/26/98 SN	

