

MOUNTAIN
CEMENT COMPANY

MOUNTAIN CEMENT COMPANY

RECEIVED

MAY 3 2009

LQD

WCC
3/3/09

Mr. Steve Ingle
Department of Environmental Quality
Land Quality Division
Herschler Building
122 West 25th Street
Cheyenne, WY 82002

RE: **Permit #658 2008-2009 Annual Report**

Dear Mr. Ingle:

Enclosed is Mountain Cement Company's Annual Report for the Weaver Limestone Quarry, permit no. 658.

Enclosed for your review are materials required for the report (e.g. 2008-2009 report form, a map, AR-1, Groundwater Quality results).

If you have any questions, please contact Andy by phone at Mountain Cement at (307) 745-2687 or (307) 760-6706 (cell) or Jeff Brasher at (307) 745-2685.

Sincerely,

Andy MacClugage
Geologist

Jeff Brasher
Quarry Tech

Enclosures

RECEIVED
MAR 3 2009
LQD

ANNUAL REPORT
AND MINE AND RECLAMATION PLANS

FEBRUARY 28, 2008 to FEBRUARY 27, 2009

SUBMITTED TO:
WYOMING DEPARTMENT OF ENVIRONMENTAL QUALITY
LAND QUALITY DIVISION
HERSCHLER BUILDING
CHEYENNE, WYOMING

REPORT PREPARED:
FEBRUARY 28, 2009

PREPARED BY:
MOUNTAIN CEMENT COMPANY
5 SAND CREEK ROAD
LARAMIE, WY
(307)745-4897



TABLE OF CONTENTS

Section	Page
ANNUAL REPORT FORM 2-28-2008 TO 2-27-09	1-6
MINE AND RECLAMATION PLAN SUMMARY	
Introduction	7
Mine Plan	
Past Mining Activities	8
Projected Mining Activities	8
Reclamation Plan	8
Past Reclamation Activities	8
Projected Reclamation Activities	8
Estimated Reclamation Costs	8

TABLES

TABLE I - Description of Weaver Quarry Lands	9
TABLE II - Estimated Reclamation Costs Summary Table for Disturbances through February 28, 2009 and Projected Disturbances for the 2009-2010 Report Period, Weaver Quarry, IQD Permit No. 658	10
TABLE III - Current Stockpile Summary Table	11
TABLE IV - Groundwater characteristics summary table for the <i>upgradient</i> monitoring well (SEO Permit #P151433W) (Installed October 1, 2003)	12
TABLE V - Groundwater characteristics summary table for the <i>downgradient</i> monitoring well (SEO Permit #P151434W) (Installed October 1, 2003)	12

APPENDIX

Itemized Performance Bond Calculations Explanation	13
--	----

MAPS

- 6. ANNUAL REPORT MAP AR-1 Mining History

ATTACHMENTS

- 6. Chain of Custody Record for Well Water Samples during the 2008-2009 Period
- 6. Water Quality Reports for Upgradient Groundwater Monitoring Well SEO Permit #P151433 during the 2008-2009 Report Period.
- 6. Water Quality Reports for Downgradient Groundwater Monitoring Well SEO Permit #P151434 during the 2008-2009 Report Period.
- 6. Water Quality Report - Trip Blank Results



Land Quality Division
Districts I, II & III
Required Annual Report Information

FOR LARGE MINING OPERATIONS

81 Wyoming Environmental Quality Act (Amended 2005-11-41), Annual Report

1.
 - (a) Name of Permittee Mountain Cement Company
 - (b) Address 5 Sand Creek Road
 - (c) Mining Permit Number Permit No. 658
 - (d) Date of Permit Issuance (and any Amendment) February 29, 1996
 - (e) Mineral(s) Mined Limestone
 - (f) State and Federal Mineral Lease None
2. Time period covered by the report: February 28, 2008 to February 27, 2009
3. Mining:
 - (a) Tabulate acreage disturbed (by pits, roads, facilities, etc.) during the report period and illustrate on map
10 acres
 - (b) Tabulate acreage affected to date by years and illustrate on map:
2.6 acres disturbed during 1996-1997 (entrance road)
2.6 acres disturbed during 1997-1998 (remaining haulroad)
14.0 acres disturbed during 1997-1998 (initial mining area)
17.1 acres disturbed during 2000-2001
23.4 acres disturbed during 2002-2003
2.2 acres disturbed during 2003-2004
8.1 acres affected on north side of pit for topsoil and spoil storage
3.9 acres affected during mining activity (total discrepancy affected acres)*
20.4 acres disturbed during 2004-2005
0.0 acres disturbed during 2005-2006
11.4 acres disturbed during 2006-2007
10 acres disturbed during 2007-2008
115.7 total acres disturbed since mine start-up
10 acres projected disturbance for the 2008-2009 reporting period
125.7 acres total affected and projected disturbance
 - (c) Tabulate all topsoil stockpile volumes, date of stockpiling and illustrate on map:
500 CY stockpiled during 1996-1997 (TS-1 entrance road)
1,300 CY stockpiled during 1997-1998 (TS-2 entrance road)
10,700 CY stockpiled during 1997-1998 (TS-3)
10,150 CY stockpiled during 2000-2001 (TS-4)
8,100 CY stockpiled during 2001-2002 (TS-5)
16,700 CY stockpiled during 2003-2004, 2004-2005 (TS-6)
2,090 CY stockpiled during 2004-2005 (TS-7)

*A more accurate means of analysis (i.e., gps, mapping, etc.) revealed 3.9 affected acres discrepancy in 2003-2004.



1,680 CY stockpiled during 2004-2005 (TS-8)
 16,700 CY stockpiled during 2004-2005 (TS-9)
 0.0 CY stockpiled during 2005-2006
 13,000 CY stockpiled during 2006-2007
 50,000 CY stockpiled during 2007-2008
 0 CY stockpiled during 2007-2008
 129,320 CY of topsoil are currently stockpiled for reclamation use since mine start-up

(d) Tabulate all out-of-pit spoil volumes, dates of placement and illustrate on map:

1,300 CY stockpiled by Harney Creek Crossing (OB-1)
 35,000 CY stockpiled during 1997-1998, 2002-2003 (OB-2)
 25,000 CY stockpiled during 2007-2008 (OB-5)
 20,000 CY stockpiled during 2002-2003 (OB-4)
 0.0 CY stockpiled during 2004-2005 (all overburden was returned to the northern active mining pit for reclamation preparation)
 0.0 CY stockpiled during 2005-2006
 0.0 CY stockpiled during 2006-2007
 0.0 CY stockpiled during 2007-2008
 81,300 CY of overburden are currently stockpiled since mine start-up for reclamation use.

(e) Tabulate quantity of commodity mined by years:

0 tons 1996-1997
 124,376 tons of limestone mined during 1997-1998
 100,500 tons of limestone mined during 1998-1998
 148,520 tons of limestone mined during 1999-2000
 361,150 tons of limestone mined during 2000-2001
 530,950 tons of limestone mined during 2001-2002
 595,530 tons of limestone mined during 2002-2003
 405,027 tons of limestone mined during 2003-2004
 723,215 tons of limestone mined during 2004-2005
 256,238 tons of limestone mined during 2005-2006
 518,584 tons of limestone mined during 2006-2007
 482,000 tons of limestone mined during 2007-2008
 400,000 tons of limestone mined during 2008-2009
 4,654,372 tons of limestone mined since mine start-up.

(f) Describe any new construction during the report period and illustrate on map; include:

1. Shop facilities, erection sites.	None
2. Roads	None
3. Culverts	None
4. Diversion ditches, collector ditches, interceptor ditches, etc.	None
5. Sediment ponds, containment ponds.	None
6. Monitoring sites.	

(g) Describe any environmental problem areas and a proposed plan for mitigating them. Illustrate on map; include:

1. Pit stability problems. None



- | | | |
|----|---|------|
| 2. | Subsidence, | None |
| 3. | Accidental water discharge, dam failure, etc. | None |
| 4. | Slumping or sliding, | None |
| 5. | Revegetation problem areas, | None |

Reclamation

- (a) Tabulate the acreage completed during the report period and illustrate on map. Distinguish between:
- | | | |
|----|--|------|
| 1. | Backfilled, graded, and contoured. Including date of approval for coal permits, | None |
| 2. | Topsoiled, | None |
| 3. | Seeded | None |
| 4. | Reseeded, | None |
| 5. | Indicate where special construction or reclamation practices were used such as for sand bodies or alluvial material. | |
- (b) Submit a map showing the reconstructed contours. The map must be the same scale and contour interval as the PMT map in the approved permit.
None Completed.
- (c) Tabulate acreage reclaimed (seeded with permanent seed mix) to date by years and illustrate on map.
No seeding was performed during the 2008-2009 report period.
- (d) Describe reclamation procedures used during the report period:
No reclamation occurred during the 2008-2009 report period.
- | | | |
|----|--|--|
| 1. | Depth of topsoil applied. Indicate whether from stockpile or directly applied. | |
| 2. | Type of seed used for seeding during the report period. | |
| 3. | Dates of seeding during the report period. | |
| 4. | Seeding procedures used. | |
| 5. | Rate of seed application. | |
| 6. | Type and rate of any fertilizer applied. | |
| 7. | Type and rate of mulch applied. | |
| 8. | Rate of irrigation water applied. | |
| 9. | Any deviations to the approved reclamation plan including, in addition to the items above, changes to the contour or location of post mining features. | |
- (e) Describe results of previous revegetation efforts; include:
- | | | |
|----|--|------|
| 1. | Types of seed that have germinated and are growing | None |
| 2. | Types of seed that are not growing successfully. | None |
| 3. | Areas experiencing problems with weeds and weed types. | None |
| 4. | Significant erosional problems. | None |
| 5. | Areas if unsuitable overburden on the surface. | None |
| 6. | Procedures used or proposed to correct these problems. | N/A |
- (f) Summarize the actual reclamation costs incurred during the report period. Costs should be itemized for each operation (i.e., grading, topsoil replacement, seeding, etc.) and for each type of disturbance (i.e., spoil, haul roads, facilities removal, etc.) on a per-acre basis.
Not Available



Describe in detail mining plans for the coming year including revised time schedules and all proposed deviations from previously approved plans. Acreages should be tabulated and illustrated on a map.

See Mine and Reclamation Plan Summary and Maps AR-1.

6. Describe in detail reclamation plans for the coming year including revised time schedules and deviations from previously approved plans. Acreages should be tabulated and illustrated on a map.

See Mine and Reclamation Plan Summary and Maps AR-1.

- NOTE On items 5 and 6 above, any proposed deviation from the approved mine and reclamation plan must be described in detail. The proposed mining and reclamation plans will be reviewed and the operator will be notified if further information is required. "Significant" deviations will require permit revision application (Form F1) and public notice pursuant to Chapter VII Section 2 of Land Quality Division Noncoal Regulations.

See Mine and Reclamation Plan Summary.

Describe in detail all monitoring activities during the report period. Summarize the data, describe procedures to correct any noted problems and deviations from previously approved methods, including:

- (a) Groundwater analyses.

Two wells sampled for analyses during the 2008-2009 reporting period. See Tables V, VI, and attachments for groundwater characteristics summary.

- (b) Surface water analyses and discharge data.

None Available

- (c) Precipitation data.

None Available

- (d) Subsidence monitoring.

None Available

- (e) Overburden analyses.

None Available

- (f) Topsoil quantities - compare calculated and actual.

None Available

- (g) Vegetation data.

None Available

- (h) Wildlife data.

None Available

- (i) A map showing and identifying monitoring locations.

See Annual Report Map for Monitoring Well locations.

8. Operator's Reclamation Performance Bond Estimate as required by Wyoming Statute §35-11-417. Reclamation cost estimates should be itemized in detail to reflect the actual estimated costs of reclaiming all lands which have been affected to date and those lands to be affected during the next report period. Costs must reflect procedures as specified in the approved mine and reclamation plan. The estimated cost of dismantling and disposal of all facilities and structures must be included. Salvage value will not be used to offset bonding requirements. Reclamation projected for the coming year will not be used to offset bonding requirements. Pit backfill costs must reflect actual yardages to be moved. Actual yardages to be moved will reflect the removal or placement of additional material to correct any deviations between the PMI map and the map submitted for part 4.(b).

See attached Table II and Appendix for estimated reclamation costs.

9. Supply any additional information as requested by the Division to:

- (a) Notices of violation

None

- (b) Orders

None

- (c) Permit stipulations, and

None

- (d) Other special conditions.

None

10. All drill holes used for immediate developmental expansion of the advancing pit(s) shall be tabulated by location and depth and shown on the mining plan map. Pursuant to W.S. §35-11-404(e), all drill holes used for exploration shall be reported to the LQD Abandoned Drill Hole Program Supervisor and the State Engineer. **None**

ANNUAL REPORT MAPS



1. Maps must be clear and legible contour maps or recent aerial photos. The preferred scale is 1" = 500'.
2. Map sheets should be of a reasonable size, generally not to exceed 48" on a side.
3. Maps must have a title block with:
 - (a) Map title.
 - (b) Name and address of permittee.
 - (c) Permit and amendment numbers.
 - (d) Annual report period.
 - (e) Scale, north arrow, contour interval, date of photography, etc.
4. All maps must show:
 - (a) Legal subdivisions (section, township, and range lines clearly labelled).
 - (b) Permit area boundary clearly shown and labelled.
 - (c) Amendment areas clearly shown and labelled.
5. The following features should all be clearly identified:
 - (a) Topsoil stockpiles (numbered).
 - (b) Settling ponds and sediment control structures.
 - (c) Haul roads.
 - (d) Pits identified by location, name, number, etc.
 - (e) Ramps (numbered).
 - (f) Out-of-pit spoil dumps including date of initial placement of material (if permanent, give approval date).
 - (g) All waste disposal sites including, but not limited to:
 1. Carbonaceous waste dumps.
 2. Partings dumps.
 3. Fly ash disposal sites, etc.
 4. Landfill sites.
 - (h) Diversion ditches.
 - (i) Monitoring sites.
 - (j) Facilities location (silos, labs, crushers, washbays, etc.).
6. History of mining and reclamation should be documents for all areas. The preferred method is to outline separate areas on the map and assign each a number. Then a summary should be presented listing the following information for each separate area:
 - (a) Acreage.
 - (b) Initial date of disturbance.
 - (c) Date of regrading.
 - (d) Date of approval of grading.
 - (e) Date of topsoiling and approximate depth, source of topsoil.
 - (f) Date of mulching and type of mulch.
 - (g) Date of seeding.
 - (h) Seed mix.
 - (i) Date and mix of reseeding.
 - (j) Any reworking such as repair of gullies, etc.
 - (k) Bond status of areas (type of bond, date of any release and percent released).
7. All areas to be affected by mining and reclamation activities in the coming year should be outlined and labelled.



A Please indicate any change in company name or business organization.

none.

3811 Turtle Creek Blvd.

#1100

Dallas, TX 75219

B List the names and addresses of the following:

1 General Manager Phil Lane, Plant Manager

2 Party to Receive Notice Andy MacClugage, Geologist

C List the names and addresses of all officers, owners and/or controllers. Include titles, positions and beginning and ending dates.



MINE AND RECLAMATION PLAN SUMMARY

Introduction

Mountain Cement Company continued to mine at the Weaver Quarry WDEQ LQD Permit No. 658 during the past report period. Groundwater monitoring has occurred using the installed monitoring wells (Map AR-1). Mining history and disturbance summary is depicted in the annual report map, AR-1.

Mine Plan

The following mine plan describes the actual mining activities for the 2008-2009 report period and future mining operations for the 2009-2010 report period at Mountain Cement Company Weaver Limestone Quarry, Permit No. 658.

Past Mining Activities: Mining was abandoned in the northeast corner of the pit area due to inferior quality of the limestone. Topsoil and overburden was removed from portions of this area and will later be reclaimed. Another adjacent block, south of the current pit area, was opened starting at the west disturbance line and advanced eastward. Stripping and removal of topsoil and overburden was done in front of the advancing mining block during the last report period. There were about 10 acres disturbed during the 2008-2009 report period. A total of **115 acres** have been affected to date. A total of **129,320 CY** of topsoil and **81,300 CY** of overburden are stockpiled for reclamation use.

Projected Mining Activities: Mountain Cement Company plans to continue expanding the southern adjacent pit area eastward, from the west disturbance line, as shown in the Annual Report map. Approximately **10 acres** are proposed to be disturbed during the 2009-2010 reporting period.



Reclamation Plan

The following reclamation plan describes actual past reclamation and expected future efforts.

Past Reclamation Activities:

Reclamation has not yet been initiated at this mine site. Limestone mining began during the 1997-1998 report period. Upon completion of mining in the north section, reclamation will occur. Initial backfilling of material has occurred along the north and west highwall to prepare for reclamation.

Future Reclamation Activities:

Reclamation is predicted to occur along the northern edges of the pit. Overburden will be removed from the adjacent, southern block and used to backfill and contour the northern pit. Initial backfilling of material has begun along the north highwall of the inactive, northern pit. Limestone mining currently occurs in the adjacent, southern pit area, advancing eastward.

Estimated Reclamation Costs

Mountain Cement Company's reclamation performance bond estimate for the current disturbances and expected disturbances during the 2009-2010 report period are itemized in the Appendix, "Itemized Performance Bond Calculations." The total reclamation costs plus an additional twenty percent (20%) contingency cost, is calculated to be approximately **\$463,400**. The bond was increased during 2005-2006 period and is currently **\$315,000**.



Table I - Description of Weaver Quarry Lands.

(Includes acreage projected to be disturbed during the upcoming report period.)

Land Description	Acres
Permit Area	1,372.5
<i>Acreage-to-Affect</i>	<i>511.14</i>
Current Affected Acreage	115.7
<i>Total Acreage-to-Affect Remaining</i>	<i>395.7</i>
Lands Requiring Area Bond Cost	115.7
Proposed Disturbance for 2008-2009	10
Lands Requiring Full Incremental Bond Cost	0.0
Lands Requiring Partial Incremental Bond Cost (Reseeding)	0.0
Lands with Requested Full Bond Release, > 2Years	0.0
Lands w/ Approved Full Bond Release	0.0
Subtotal (Incremental Bond Total)	115.7
Total Native Land Remaining in Permit Area	1256.8
Total of Bonded, Bond Released and Native Lands	1372.5



Table II - Estimated Reclamation Costs Summary Table for Disturbances through February 28, 2009 and Projected Disturbances for the 2009-2010 Report Period, Weaver Quarry, LQD Permit No. 658.

BOND TYPE	RECLAMATION ACTIVITY	APPENDIX LQD, Guideline #12	AVERAGE ONE-WAY HAUL (Ft)	UNIT	UNIT COST (\$/unit)	TOTAL (\$)
Area Bond	Drilling and Blasting	n a	n a	2.0 CY LF x 8,000 LF	\$0.22 BCY	3,520
	Dozing	E	50 ft.	2.0 CY LF x 8,000 LF	\$0.142 CY	2,272
	Backfilling and Contouring	C 637E Scraper	1,000 ft.	81,300 CY Overburden	\$1.187 CY	96,503
	Topsoil Redistribution	C 637E Scraper	1,000 ft.	129,320 CY Topsoil	\$1.187 CY	153,502
	Final Grading	G 16H Motor Grader	n a	115.7 Acres	\$64.77 acre	7,494
	Scarification	P 16H Motor Grader	n a	115.7 Acres	\$59.41 acre	6,874
	Asphalt Ripping	I D9R Dozer	n a	2.4 Acres	\$746.62 acre	1,792
	Demolition	J 200 ft.	n a	10 (20' section.)	\$123.35 unit	1,236
	Demolition- Harney Creek Culverts	-	n a	2.48-inch CMP	-	8,500
	Demolition- Groundwater Monitoring Wells	L	n a	-	-	2,140
	Seed, Mulch, Prepare Soil	Q	n a	115.7 Acres	\$750 acre	86,775
	Fencing- removal	Q	n a	16,200 LF	\$0.96 Ft	15,552



Total LQD Bond Amount= \$315,000

Subtotal	\$386,160
20% DEQ Contingency	\$ 77,232
Total (rounded up to nearest \$100 increment):	\$463,400

Table III - Current Stockpile Summary Table

Pile	Volume	Placement Date
TS-1	500	1996-1997
TS-2	1,300	1997-1998
TS-3	10,700	1997-1998
TS-4	10,150	2000-2001
TS-5	8,100	2001-2002
TS-6	16,700	2003-2004, 2004-2005
TS-7	2,090	2004-2005
TS-8	15,100	2004-2005
TS-9	1,690	2004-2005
TS-10	13,000	2006-2007
TS-11	25,000	2007-2008
TS-12	25,000	2007-2008
OB-1	1,300	Harney Creek Crossing
OB-2	35,000	1997-1998, 2002-2003
OB-5	25,000	2007-2008
OB-4	20,000	2002-2003
<i>Total Topsoil available for reclamation:</i>		<i>129,320 CY</i>
<i>Total Overburden available for reclamation:</i>		<i>81,300 CY</i>



Approximately 1,300 CY of overburden material was placed near the Harney Creek Crossing at an unknown date. This amount was not shown in previous reports and will be used for backfill material.



Table IV - Groundwater characteristics summary table for the *upgradient* monitoring well (SFO Permit #P151433W).

(Installed October 1, 2003)

Parameter	2/5/08	5/29/08	9/4/08	12/10/08
Static Water Depth	202.33	198	193.57	195.6
Lab Conductivity @ 25 °C, μ mhos/cm	480	-	458	441
Total Dissolved Solids @ 180 °C, (mg/L)	280	-	270	250
Total Alkalinity as CaCO_3 , (mg/L)	240	-	224	281
Total Hardness (mg/L) as CaCO_3 , mg/L	234	-	207	230
Nitrate + Nitrate as N (mg/L)	1.17	-	1.11	0.81
Total Petroleum Hydrocarbons, TPH 418.1, (mg/L)	<5; i.e., ND	-	<5; i.e., ND	<5; i.e., ND

Table V - Groundwater characteristics summary table for the *downgradient* monitoring well (SFO Permit #P151434W).

(Installed October 1, 2003)

Parameter	2-5-2008	5-29-2008	9-4-2008	12-10-2008
Static Water Depth	22.18	11.9	11.63	10.5
Lab Conductivity @ 25 °C, μ mhos/cm	450	-	452	437
Total Dissolved Solids @ 180 °C, (mg/L)	250	-	270	240
Total Alkalinity as CaCO_3 , (mg/L)	220	-	220	265
Total Hardness (mg/L) as CaCO_3 , mg/L	232	-	231	224
Nitrate + Nitrate as N (mg/L)	1.55	-	2.39	1.73
Total Petroleum Hydrocarbons, TPH 418.1, (mg/L)	<5; i.e., ND	1; i.e., ND	<5; i.e., ND	<5; i.e., ND

Due to personnel changes at Tri-Hydro Corporation, the sample data for 5/29/08 has been misplaced. When this data is located it will be forwarded to DEQ LQI) with a correction change sheet.

Itemized Performance Bond Calculations Explanation

I. Pit Backfill and Highwall Reduction

- A. Highwall Reduction: The highwall will be reduced to a 3:1 slope by use of shot rock and overburden and unrecoverable limestone. Using drilling, blasting and dozing methods, a highwall of 12 feet average height and approximately 8,000 feet long may need to be reduced to an initial 3:1 slope. At an average highwall of 12 feet, approximately 2.0 CY per linear foot will be dozed to the base of the highwall. Appendix E, "Calculations for Moving Material With a Caterpillar D9N Dozer", 10% Grade, 50 Ft., was used. To calculate drilling and blasting costs, \$0.22 BCY was used.

$$\text{Drilling and Blasting} = 2.0 \text{ CY} \times 8,000' @ \$0.22 \text{ BCY} = \$3,520$$

$$\text{Dozing} = 2.0 \text{ CY} \times 8,000' @ \$0.142 \text{ CY} = \$2,272$$

- B. Backfill of Overburden and Reject Material: A total of 81,300 CY of reject material and overburden will be hauled an average of 1,000 feet over the pit area and used to slope the highwalls and contouring. Appendix C, "Calculations for Moving Materials with a Caterpillar 637E Push-Pull Scraper Fleet", 1,000 Ft., was used.

$$81,300 \text{ CY} @ \$1.187 \text{ CY} = \$96,503$$

- C. Replacement of Topsoil: A total of 66,320 CY of topsoil replacement material will be hauled an average of 1,000 feet over the pit area and roads. Appendix C, "Calculations for Moving Materials with a Caterpillar 637E Push-Pull Scraper Fleet", 1,000 Ft., was used.

$$129,320 \text{ CY} @ \$1.187 \text{ CY} = \$153,502$$

- D. Rough and Final Grading: 115.7 acres will require grading. Appendix G, "Calculations for Final Grading with a Caterpillar 16H Motor Grader", was used.

$$115.7 \text{ acres} \times \$64.77 \text{ acre} = \$7,494$$



- F. Scarification: The backfilled material will be scarified with a Caterpillar 16H Motor Grader to relieve compaction prior to topsoil replacement. Appendix P, "Cost Estimate for Scarification of Compacted Surfaces", was used.

$$115.7 \text{ acres} \times \$59.41/\text{acre} = \$6,874$$

II. Access Roads and Demolition

- A. There is approximately 5,110 LF of road to be reclaimed in the permit area. This includes 3,010 LF of paved road and 1,350 LF of unpaved road (750 LF of unpaved haulroad (0.8 acres) is included in the 2004-2005 proposed disturbance). Costs for moving material, grading, and scarification are already included in the previous calculations. Costs for revegetation will be included in the following sections. Only costs are calculated for ripping the 3,010 LF of asphalt. A road, 3,010 feet long by 35 feet wide will yield 2.4 acres. Appendix L, "Cost Estimate for Ripping Asphalt Using a Caterpillar D9R Dozer", was used.

$$2.4 \text{ acres} @ \$746.62/\text{acre} = \$1,792$$

- B. Demolition: There will be no permanent features remaining in the permit area (e.g. culverts). To estimate cost associated with culverts removal, a maximum of 200 feet of culvert will used (10 units). Appendix J, "Cost Estimate for Culvert Removal", was used. One unit equals 20 feet section of CMP.

$$10 \text{ units (200 Ft.)} @ \$123.35/\text{unit} = \$1,236$$

There are two, 48-inch culverts, with concrete aprons, installed at the Harney Creek Crossing. It has been estimated in previous reports that it will cost about \$8,500 to remove these culverts.

$$2, 48\text{-inch culverts at the Harney Creek Crossing} = \$8,500$$



- C. Monitoring Wells: There are two monitoring wells that will need to be plugged and abandoned once post-mine groundwater characteristics are considered satisfactory by the WDEQ/LQD. Appendix L, "Abandonment and Sealing of Cased Drill Holes and Monitoring Wells", was used.

Abandonment and Sealing of two monitoring wells \$2,140

III. Revegetation Costs

- A. Final Revegetation: Costs associated with the affected section resulting in vegetation (i.e. seeding, mulching, & prepare soil). This includes the haulroad(s). Appendix Q, "Revegetation Tasks and Costs", was used.

115.7 acres @ \$750/acre \$86,775

- B. Fencing: Fencing will be used to protect the reclamation from livestock grazing or damage until vegetation growth is established and/or bond released. Approximately 16,200 LF of fencing is currently installed around the current disturbance area, specifically, 1/3 of the area-to-affect. When affected area is released from the authority of the WDEQ/LQD (i.e. bond release), the cost estimated will reflect fence removal. Appendix Q, "Revegetation Tasks and Costs", was used.

16,200 Ft. @ \$0.96/Ft \$15,552

Subtotal	\$386,160
20% DEQ Contingency	<u>\$ 77,232</u>
Grand Bond Total (rounded up to nearest \$100 increment)	\$463,400
<i>Current Bond Level</i>	<i>\$315,000</i>





Sample Analysis Report

CLIENT: Mountain Cement Company
5 Sand Creek Road
Laramie, WY 82070

Date Reported: 2/14/2008
Report ID: S0802096001

Project: 407 004 001
Lab ID: S0802096-005
Client Sample ID: P-151433
COC: 117221

Work Order: S0802096
Collection Date: 2/5/2008 2:35:00 PM
Date Received: 2/7/2008 12:05:00 PM
Sampler: PC
Matrix: Water

Analyses	Result	PQL	Qual	Units	Date Analyzed/Init	Method
General Parameters						
Electrical Conductivity	480	5		µmhos/cm	02/07/2008 2255 AF	SM 2510B
Total Dissolved Solids (180)	280	10		mg/L	02/08/2008 1550 MKT	SM 2540
Alkalinity, Total (As CaCO ₃)	240	5		mg/L	02/07/2008 2255 AF	SM 2320B
Hardness, Calcium/Magnesium (As CaCO ₃)	234	1		mg/L	02/11/2008 1513 AF	SM 2340B
Total Petroleum Hydrocarbons (SGT-HEM)	ND	5		mg/L	02/12/2008 000 SNS	EPA 1664A
Anions						
Nitrogen, Nitrate-Nitrite (as N)	1.17	0.05		mg/L	02/13/2008 1215 SK	EPA 353.2
Cations						
Calcium	61	1		mg/L	02/08/2008 922 RM	EPA 200.7
Magnesium	20	1		mg/L	02/08/2008 922 RM	EPA 200.7

These results apply only to the samples tested.

Qualifiers:

- * Value exceeds Maximum Contaminant Level
- E Value above quantitation range
- J Analyte detected below quantitation limits
- M Value exceeds Monthly Ave or MCL
- S Spike Recovery outside accepted recovery limits

- B Analyte detected in the associated Method Blank
- H Holding times for preparation or analysis exceeded
- L Analyzed by a contract laboratory
- ND Not Detected at the Reporting Limit

Reviewed by:

Connie Mattson
Connie Mattson, Project Manager



Sample Analysis Report

CLIENT: Mountain Cement Company
5 Sand Creek Road
Laramie, WY 82070

Date Reported: 2/14/2008
Report ID: S0802096001

Project: 407 004 001
Lab ID: S0802096-006
Client Sample ID: P-151434
COC: 117221

Work Order: S0802096
Collection Date: 2/5/2008 3:25:00 PM
Date Received: 2/7/2008 12:05:00 PM
Sampler: PC
Matrix: Water

Analyses	Result	PQL	Qual	Units	Date Analyzed/Init	Method
General Parameters						
Electrical Conductivity	450	5		µmhos/cm	02/07/2008 2303 AF	SM 2510B
Total Dissolved Solids (180)	250	10		mg/L	02/08/2008 1555 MKT	SM 2540
Alkalinity, Total (As CaCO ₃)	220	5		mg/L	02/07/2008 2303 AF	SM 2320B
Hardness, Calcium/Magnesium (As CaCO ₃)	232	1		mg/L	02/11/2008 1513 AF	SM 2340B
Total Petroleum Hydrocarbons (SGT-HEM)	ND	5		mg/L	02/12/2008 000 SNS	EPA 1664A
Anions						
Nitrogen, Nitrate-Nitrite (as N)	1.55	0.05		mg/L	02/13/2008 1216 SK	EPA 353.2
Cations						
Calcium	56	1		mg/L	02/08/2008 929 RM	EPA 200.7
Magnesium	23	1		mg/L	02/08/2008 929 RM	EPA 200.7

These results apply only to the samples tested.

Qualifiers:

- * Value exceeds Maximum Contaminant Level
- E Value above quantitation range
- J Analyte detected below quantitation limits
- M Value exceeds Monthly Ave or MCL
- S Spike Recovery outside accepted recovery limits

- B Analyte detected in the associated Method Blank
- H Holding times for preparation or analysis exceeded
- L Analyzed by a contract laboratory
- ND Not Detected at the Reporting Limit

Reviewed by:

Connie Mattson, Project Manager



Date: 24-Sep-08

CLIENT: Mountain Cement Company
Project: Red Buttes/Weaver/Etchepare
Lab Order: S0809114

CASE NARRATIVE

Report ID: S0809114001

Samples Linton, MC-MW-1, MC-MW-2, P-151433, P-151434, QAQC BD-1, and Waitkus-R were received on September 5, 2008.

All samples were received and analyzed within the EPA recommended holding times, except those noted in this case narrative. Samples were analyzed using the methods outlined in the following references:

U.S.E.P.A. 600 "Methods for Chemical Analysis of Water and Wastes", 1993
"Standard Methods For The Examination of Water and Wastewater", 20th ed., 1998
Test Methods for Evaluating Solid Waste, Physical/Chemical Methods, SW846, 3rd Edition

All Quality Control parameters met the acceptance criteria defined by EPA and Inter-Mountain Laboratories except as indicated in this case narrative.





Inter-Mountain Laboratories, Inc.

Sheridan, WY and Gillette, WY

- CHAIN OF CUSTODY RECORD -

This is a LEGAL DOCUMENT. All shaded fields must be completed.

120759

Client Name MOUNTAIN CEMENT	Project Identification RED BONES / WENNER / FIVE PHASE	Sampler (Signature/Printed) [Signature]	Telephone # 307-745-7474																														
Report Address 5 SAND CREEK RD SHERIDAN WY 82070	Contact Name and Email MARK A. DREWS	ANALYSES / PARAMETERS <table border="1"><tr><td>TDH</td><td>GENERAL</td><td>NUTRIENT</td><td>TRACE METALS</td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr></table>		TDH	GENERAL	NUTRIENT	TRACE METALS																										
TDH	GENERAL			NUTRIENT	TRACE METALS																												
Invoice Address SAME	Voice 307-745-4879	FAX 307-745-4534																															
	Purchase Order #	Quote #																															



ITEM	LAB ID (Lab Use Only)	DATE SAMPLED	TIME SAMPLED	SAMPLE IDENTIFICATION	Matrix	# of Containers	TDH	GENERAL	NUTRIENT	TRACE METALS					REMARKS
1	580511/10	9/4/08	0845	P-151433	WT	4	X	X	X	X					ALL SAMPLES
2	7	9/4/08	0930	P-151434	WT	4	X	X	X	X					UNTESTED.
3		9/4/08	1045	MC-1 WEST	WT	3		X	X	X					
4		9/4/08	1130	MC-2 EAST	WT	3		X	X	X					
5		9/4/08	1230	MC-KIRK R	WT	4	X	X	X	X					
6		9/4/08	1300	MC-AN	WT	4	X	X	X	X					
7		9/4/08	1345	MC-ALD-2	WT	4	X	X	X	X					
8		9/4/08	1450	MC-WL-1	WT	4	X	X	X	X					
9		9/4/08	0700	QAGC RD-1	WT	4	X	X	X	X					
10															
11															
12															
13															
14															

LAB COMMENTS 0.8 2.4	Relinquished By (Signature/Printed) [Signature]	DATE 9/4/08	TIME 1700	Received By (Signature/Printed) Kit Stettin	DATE 9/5/08	TIME 952

SHIPPING INFO		MATRIX CODES		TURN AROUND TIMES		COMPLIANCE INFORMATION		ADDITIONAL REMARKS	
☒ UPS	Water (WT)	☒ Check desired service	Compliance Monitoring ? (Y/N)						
☐ Fed Express	Soil SL	☐ Standard turnaround	Program (SDWA, NPDES, ...)						
☐ US Mail	Solid SD	☐ RUSH - 5 Working Days	PWSID / Permit #						
☐ Other Carried	Trip Blank TB	☐ URGENT - < 2 Working Days	Chlorinated? (Y/N)						
☐ Other	Other OT	Rush & Urgent Surcharges will be applied		Sample Disposal: Lab ☒ Client ☐					

Sample Analysis Report

CLIENT: Mountain Cement Company
5 Sand Creek Road
Laramie, WY 82070

Date Reported: 9/24/2008
Report ID: S0809114001

Project: Red Butes/Weaver/Etchepare
Lab ID: S0809114-001
Client Sample ID: P-151433
COC: 120759

Work Order: S0809114
Collection Date: 9/4/2008 8:45:00 AM
Date Received: 9/5/2008 9:52:00 AM
Sampler: BJ
Matrix: Water

Analyses	Result	PQL	Qual	Units	Date Analyzed/Init	Method
General Parameters						
Electrical Conductivity	458	5		µmhos/cm	09/08/2008 1656 SM	SM 2510B
Total Dissolved Solids (180)	270	10		mg/L	09/08/2008 1455 MKS	SM 2540
Alkalinity, Total (As CaCO ₃)	224	5		mg/L	09/08/2008 1656 SM	SM 2320B
Hardness, Calcium/Magnesium (As CaCO ₃)	207	1		mg/L	09/16/2008 1320 SM	SM 2340B
Total Petroleum Hydrocarbons (SGT-HEM)	ND	5		mg/L	09/12/2008 000 SNS	EPA 1664A
Anions						
Nitrogen, Nitrate-Nitrite (as N)	1.11	0.05		mg/L	09/15/2008 1229 LJK	EPA 353.2
Cations						
Calcium	43	1		mg/L	09/09/2008 015 RM	EPA 200.7
Magnesium	24	1		mg/L	09/09/2008 015 RM	EPA 200.7

These results apply only to the samples tested.

Qualifiers:

- * Value exceeds Maximum Contaminant Level
- E Value above quantitation range
- J Analyte detected below quantitation limits
- M Value exceeds Monthly Ave or MCL
- S Spike Recovery outside accepted recovery limits

B Analyte detected in the associated Method Blank
H Holding times for preparation or analysis exceeded
L Analyzed by a contract laboratory
ND Not Detected at the Reporting Limit



Reviewed by: Connie Mattson
Connie Mattson, Project Manager

Sample Analysis Report

CLIENT: Mountain Cement Company
5 Sand Creek Road
Laramie, WY 82070

Date Reported: 9/24/2008
Report ID: S0809114001

Project: Red Butes/Weaver/Etchepare
Lab ID: S0809114-002
Client Sample ID: P-151434
COC: 120759

Work Order: S0809114
Collection Date: 9/4/2008 9:30:00 AM
Date Received: 9/5/2008 9:52:00 AM
Sampler: BJ
Matrix: Water

Analyses	Result	PQL	Qual	Units	Date Analyzed/Init	Method
General Parameters						
Electrical Conductivity	452	5		µmhos/cm	09/08/2008 1703 SM	SM 2510B
Total Dissolved Solids (180)	270	10		mg/L	09/08/2008 1500 MKS	SM 2540
Alkalinity, Total (As CaCO ₃)	220	5		mg/L	09/08/2008 1703 SM	SM 2320B
Hardness, Calcium/Magnesium (As CaCO ₃)	231	1		mg/L	09/16/2008 1320 SM	SM 2340B
Total Petroleum Hydrocarbons (SGT-HEM)	ND	5		mg/L	09/12/2008 000 SNS	EPA 1664A
Anions						
Nitrogen, Nitrate-Nitrite (as N)	2.39	0.05		mg/L	09/15/2008 1230 LJK	EPA 353.2
Cations						
Calcium	59	1		mg/L	09/09/2008 018 RM	EPA 200.7
Magnesium	21	1		mg/L	09/09/2008 018 RM	EPA 200.7

These results apply only to the samples tested.

Qualifiers:

- * Value exceeds Maximum Contaminant Level
- E Value above quantitation range
- J Analyte detected below quantitation limits
- M Value exceeds Monthly Ave or MCL
- S Spike Recovery outside accepted recovery limits

- B Analyte detected in the associated Method Blank
- H Holding times for preparation or analysis exceeded
- L Analyzed by a contract laboratory
- ND Not Detected at the Reporting Limit

Reviewed by:

Connie Mattson

Connie Mattson, Project Manager



Date: 24-Dec-08

CLIENT: Mountain Cement Company
Project: Red Buttes Quarry
Lab Order: S0812196

CASE NARRATIVE

Report ID: S0812196001

Samples BD121008, FB121008, Linton, MC-MW-01, MC-MW-02, P-151433, P-151434, and Waitkus-R were received on December 11, 2008.

All samples were received and analyzed within the EPA recommended holding times, except those noted in this case narrative. Samples were analyzed using the methods outlined in the following references:

U.S.E.P.A. 600 "Methods for Chemical Analysis of Water and Wastes", 1993
"Standard Methods For The Examination of Water and Wastewater", 20th ed., 1998
Test Methods for Evaluating Solid Waste, Physical/Chemical Methods, SW846, 3rd Edition
Methods indicated with the Monday, March 12, 2007 Federal Register, 40 CFR Part 122, 136 et al.

All Quality Control parameters met the acceptance criteria defined by EPA and Inter-Mountain Laboratories except as indicated in this case narrative.





Inter-Mountain Labs
Sheridan, WY and Gillette, WY

- CHAIN OF CUSTODY RECORD -

This is a LEGAL DOCUMENT. All shaded fields must be completed. See reverse for instructions.

Nº 122390

Client Name MOUNTAIN CEMENT	Project Identification RED BUTTES QUARRY	Sampler (Signature/Printed) <i>[Signature]</i> BERRETH JACOB	Telephone # 307-745-7474				
Report Address 5 SAND CREEK RD LARAMIE, WY 82070	Contact Name	ANALYSES / PARAMETERS					
Invoice Address SAME	Email 307-745-4879						
Purchase Order #	Quote #						
		TPH	GENERAL	NUTRIENTS	HARDNESS (mg)		
		REMARKS					

ITEM	LAB ID (Lab Use Only)	DATE SAMPLED	TIME	SAMPLE IDENTIFICATION	Matrix	# of Containers	TPH	GENERAL	NUTRIENTS	HARDNESS (mg)								
1	50812196/001	12/10/08	1204	P-151433	WT	4	X	Y	X	X								
2	002		1041	P-151434			X	X	X	X								
3	003		1220	mc-mw-01			X	X	X	X								
4	004		1314	mc-mw-02			X	X	X	X								
5	005		1334	LINTON			X	X	X	X								
6	006		1447	WAITKUS-TR			X	X	X	X								
7	007			BD121008			X	Y	X	X								
8	508		1450	FB121008			X	X	X	X								
9																		
10																		
11																		
12																		
13																		
14																		

LAB COMMENTS	Relinquished By (Signature/Printed) <i>[Signature]</i> BERRETH JACOB	DATE 12/10/08	TIME 1600	Received By (Signature/Printed) <i>[Signature]</i>	DATE 12/10/08	TIME 1254
1.6 3.3						

SHIPPING INFO	MATRIX CODES	TURNAROUND TIMES	COMPLIANCE INFORMATION	ADDITIONAL REMARKS
☐ UPS ☐ Fed Express ☐ US Mail ☐ Hand Carried ☐ Other _____	Water WT Soil SL Solid SD Trip Blank TB Other OT	Check desired service ☒ Standard turnaround ☐ RUSH - 5 Working Days ☐ URGENT - < 2 Working Days <i>Rush & Urgent Surcharges will be applied</i>	Compliance Monitoring? Y (N) Program (SDWA, NPDES,...) PWSID / Permit # Chlorinated? Y (N) Sample Disposal: Lab ☒ Client	

Sample Analysis Report

CLIENT: Mountain Cement Company
5 Sand Creek Road
Laramie, WY 82070

Date Reported: 12/24/2008

Report ID: S0812196001

Project: Red Buttes Quarry
Lab ID: S0812196-001
Client Sample ID: P-151433
COC: 122390

Work Order: S0812196
Collection Date: 12/10/2008 10:04:00 AM
Date Received: 12/11/2008 10:54:00 AM
Sampler: BJ
Matrix: Water

Analyses	Result	PQL	Qual	Units	Date Analyzed/Init	Method
General Parameters						
Electrical Conductivity	441	5		µmhos/cm	12/12/2008 1515 KO	SM 2510B
Total Dissolved Solids (180)	250	10		mg/L	12/15/2008 1615 MKS	SM 2540
Alkalinity, Total (As CaCO ₃)	281	5		mg/L	12/12/2008 1515 KO	SM 2320B
Hardness, Calcium/Magnesium (As CaCO ₃)	230	1		mg/L	12/15/2008 1615 KO	SM 2340B
Total Petroleum Hydrocarbons (SGT-HEM)	ND	5		mg/L	12/22/2008 000 SNS	EPA 1664A
Anions						
Nitrogen, Nitrate-Nitrite (as N)	0.81	0.05		mg/L	12/17/2008 1626 SK	EPA 353.2
Cations						
Calcium	59	1		mg/L	12/11/2008 2345 DG	EPA 200.7
Magnesium	20	1		mg/L	12/11/2008 2345 DG	EPA 200.7

These results apply only to the samples tested.

Qualifiers:

- * Value exceeds Maximum Contaminant Level
- E Value above quantitation range
- J Analyte detected below quantitation limits
- M Value exceeds Monthly Ave or MCL
- S Spike Recovery outside accepted recovery limits

- B Analyte detected in the associated Method Blank
- H Holding times for preparation or analysis exceeded
- L Analyzed by a contract laboratory
- ND Not Detected at the Reporting Limit



Reviewed by:

Connie Mattson

Connie Mattson, Project Manager

Sample Analysis Report

CLIENT: Mountain Cement Company
5 Sand Creek Road
Laramie, WY 82070

Date Reported: 12/24/2008
Report ID: S0812196001

Project: Red Buttes Quarry
Lab ID: S0812196-002
Client Sample ID: P-151434
COC: 122390

Work Order: S0812196
Collection Date: 12/10/2008 10:41:00 AM
Date Received: 12/11/2008 10:54:00 AM
Sampler: BJ
Matrix: Water

Analyses	Result	PQL	Qual	Units	Date Analyzed/Init	Method
General Parameters						
Electrical Conductivity	437	5		µmhos/cm	12/12/2008 1523 KO	SM 2510B
Total Dissolved Solids (180)	240	10		mg/L	12/15/2008 1620 MKS	SM 2540
Alkalinity, Total (As CaCO ₃)	265	5		mg/L	12/12/2008 1523 KO	SM 2320B
Hardness, Calcium/Magnesium (As CaCO ₃)	224	1		mg/L	12/15/2008 1615 KO	SM 2340B
Total Petroleum Hydrocarbons (SGT-HEM)	ND	5		mg/L	12/22/2008 000 SNS	EPA 1664A
Anions						
Nitrogen, Nitrate-Nitrite (as N)	1.73	0.05		mg/L	12/17/2008 1627 SK	EPA 353.2
Cations						
Calcium	54	1		mg/L	12/11/2008 2348 DG	EPA 200.7
Magnesium	22	1		mg/L	12/11/2008 2348 DG	EPA 200.7

These results apply only to the samples tested.

Qualifiers:

- * Value exceeds Maximum Contaminant Level
- E Value above quantitation range
- J Analyte detected below quantitation limits
- M Value exceeds Monthly Ave or MCL
- S Spike Recovery outside accepted recovery limits


- B Analyte detected in the associated Method Blank
- H Holding times for preparation or analysis exceeded
- L Analyzed by a contract laboratory
- ND Not Detected at the Reporting Limit



Reviewed by:

Connie Mattson


Connie Mattson, Project Manager

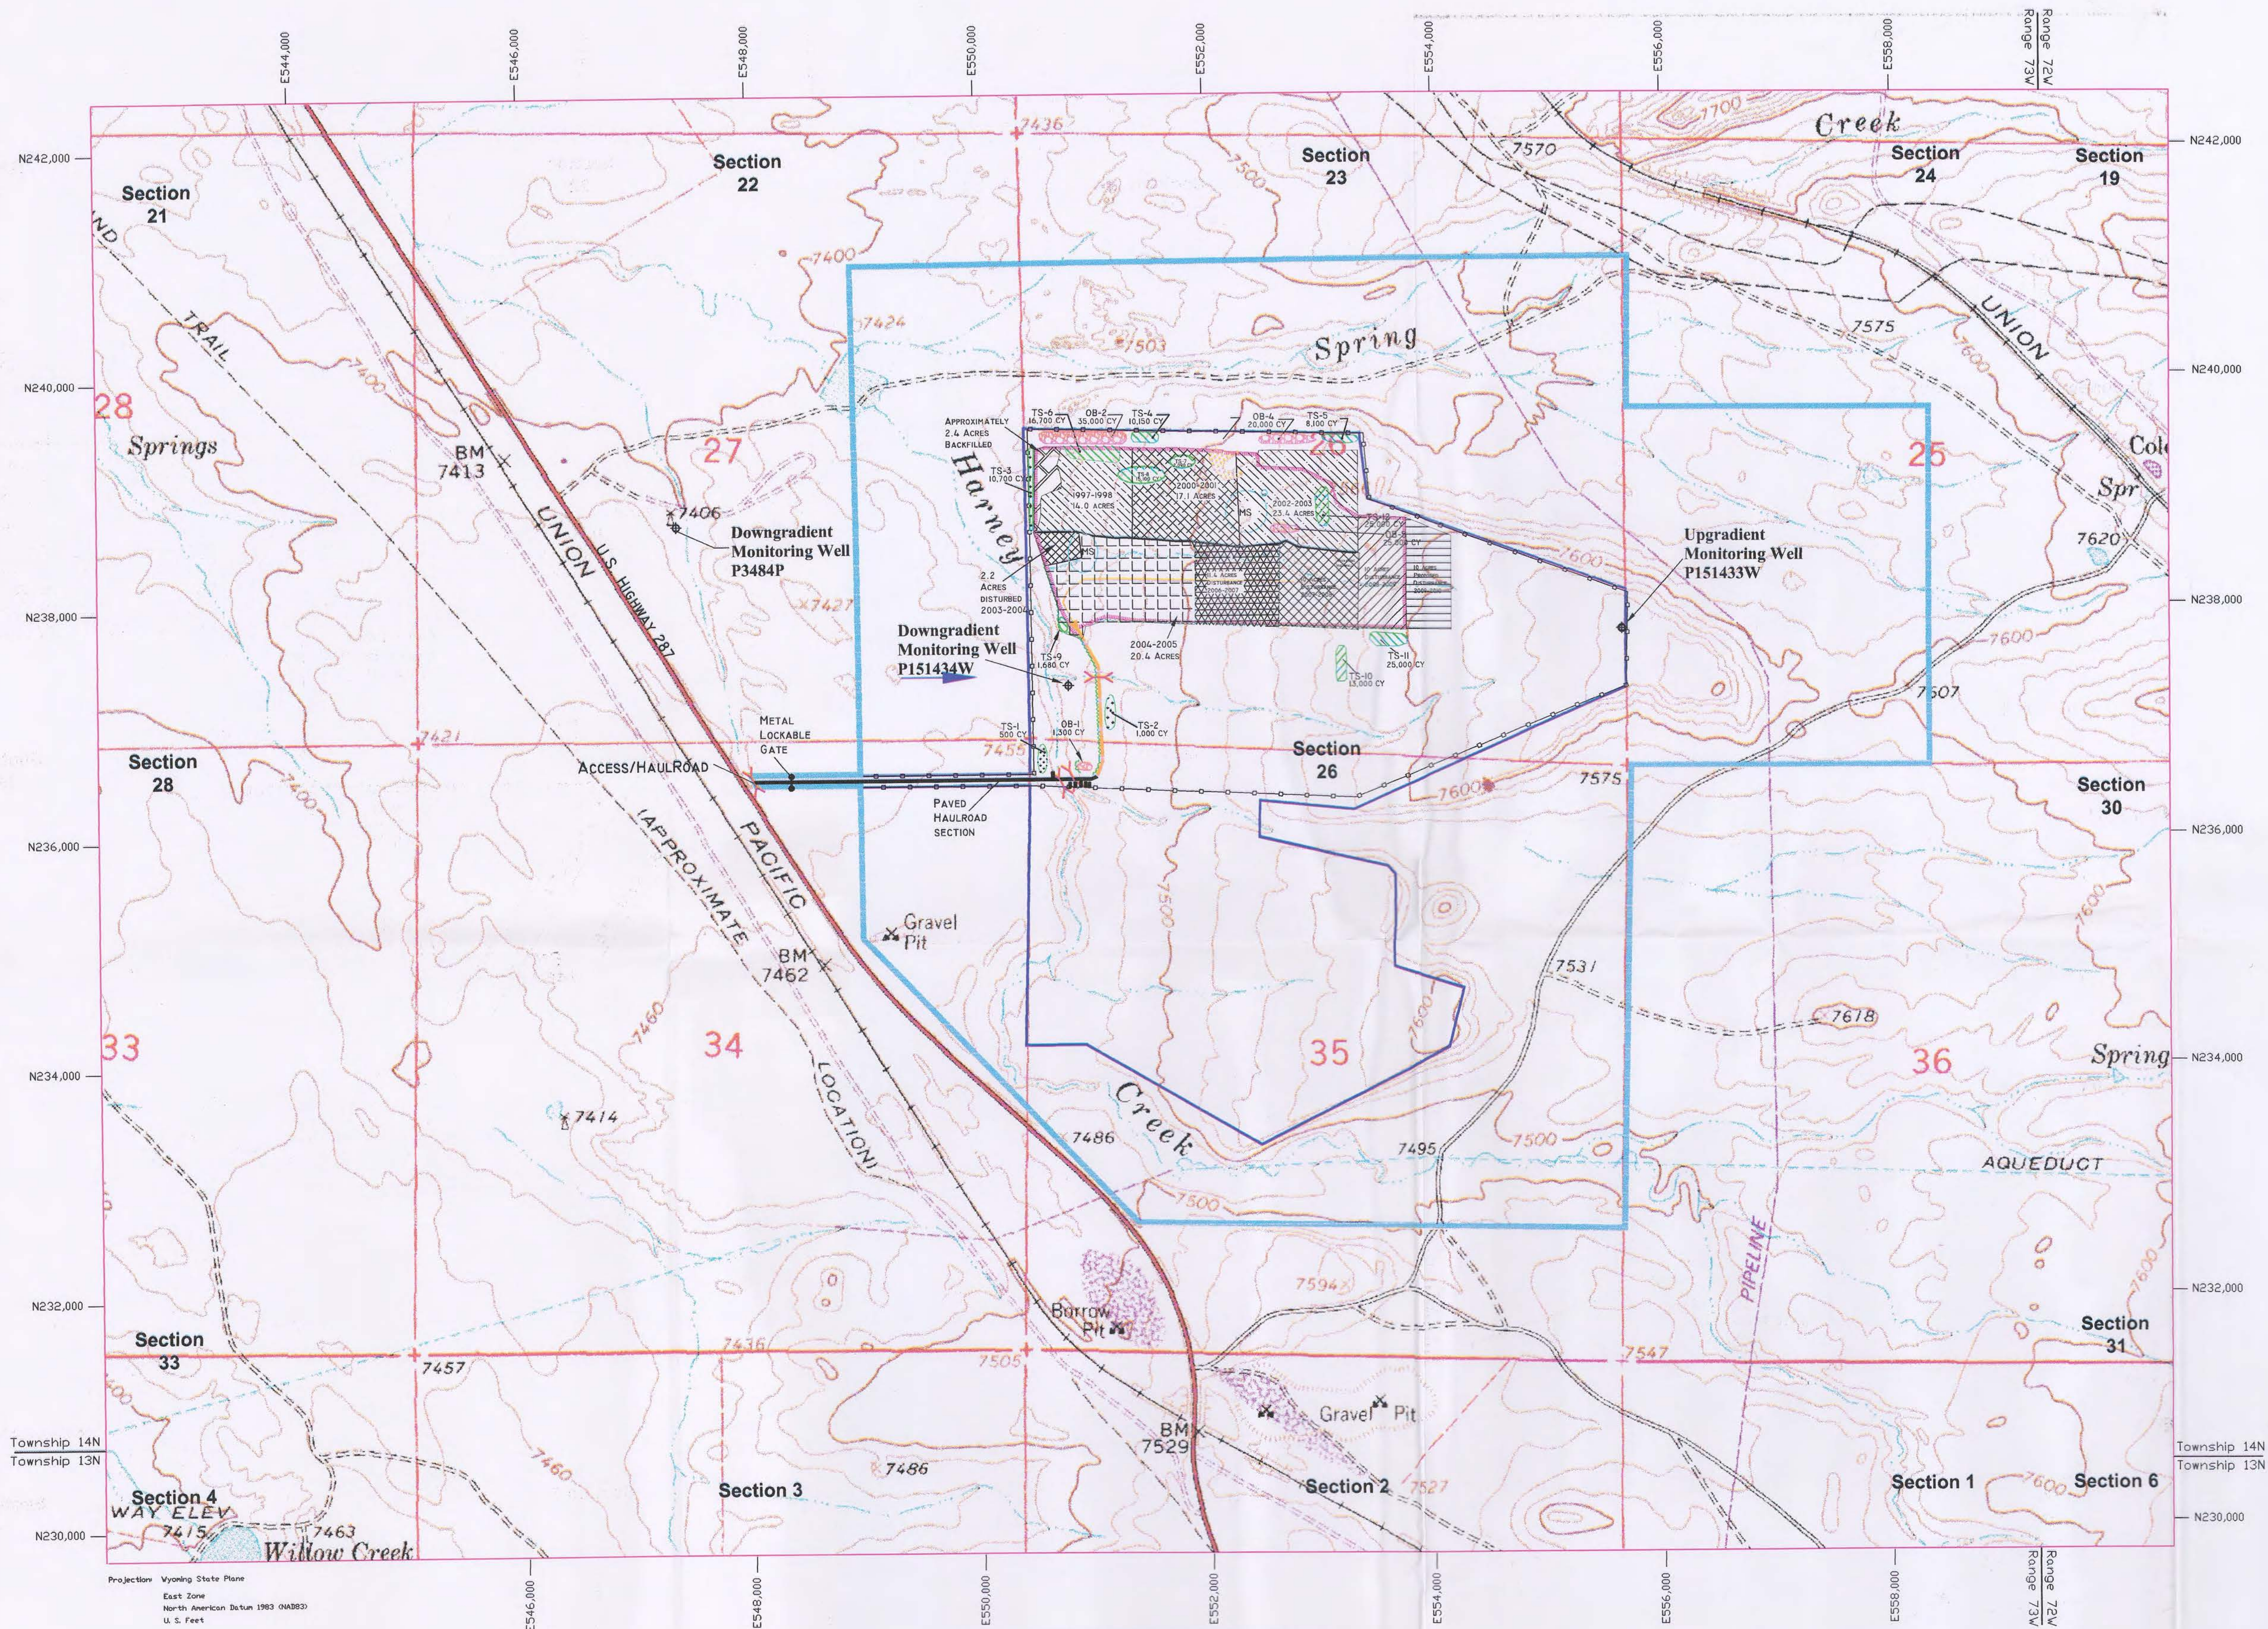

LEGEND

- Permit Boundary
- Affected Area Boundary Limit
- Access/Haulroad with Paved Section
- Established (Seeded) Topsoil Stockpile with reference number
- Current Topsoil Stockpile with reference number
- Current Overburden Stockpile with reference number
- Current Material Stockpiles
- Disturbed 1997-1998 Approximately 14.0 Acres
- Disturbed 2000-2001 Approximately 17.1 Acres
- Disturbed (Stripped) 2002-2003 Approximately 23.4 Acres
- Disturbed (Stripped) 2003-2004 Approximately 5.3 Acres
- Disturbance 2004-2005 Approximately 20.4 Acres
- Disturbance 2006-2007 Approximately 11.4 Acres
- Disturbance 2007-2008 Approximately 10 Acres
- Disturbance 2008-2009 Approximately 10 Acres
- Disturbance Proposed 2009-2010 Approximately 10 Acres
- Backfilled 2004-2005 Approximately 2.4 Acres
- Fence
- Culverts
- Quarry HighWall
- Pit Access Ramps
- Monitoring Wells
- Direction of Mining

SCALE 1" = 800'
CONTOUR INTERVAL 20'

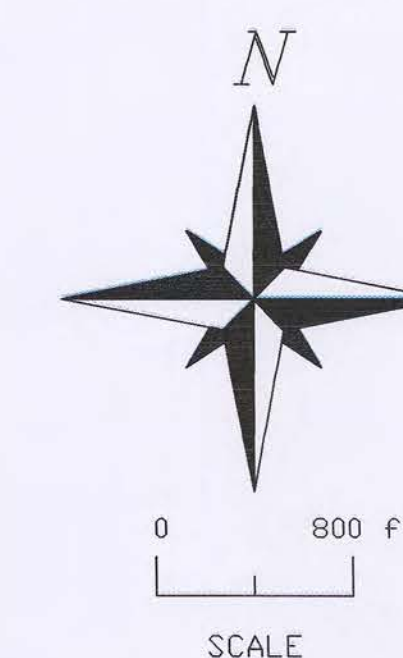

Permit #658
Weaver Limestone Quarry
Annual Report Map AR-1
February 28, 2008 - February 27, 2009

Mountain Cement Company
5 Sand Creek Road
Laramie, WY 82070

Red Buttes, Wyo.
USGS Quad Map (Enhanced DRG)
Township 14N, Range 73W, 6th P.M.
Sections 25, 26, 34 & 35
Albany County, Wyoming

February 27, 2009 by AHM

Current Stockpile Summary

Ref.	Volume (CY)	Placement Date
TS-1	1,000	1997-1998
TS-2	1,000	1997-1998
TS-3	10,000	1997-1998
TS-4	10,000	2000-2001
TS-5	8,000	2001-2002
TS-6	10,000	2003-2004, 2004-2005
TS-7	2,000	2004-2005
TS-8	15,000	2004-2005
TS-9	1,000	2004-2005
TS-10	13,000	2006-2007
TS-11	25,000	2007-2008
TS-12	25,000	2007-2008
OB-1	1,000	Unknown (by Harney Creek Crossing)
OB-2	12,000	1997-1998, 2002-2003
OB-3	25,000	2007-2008
OB-4	20,000	2002-2003
Total Topsoil available for reclamation:		129,300 CY
Total overburden available for reclamation:		81,300 CY

Note:
1. Field conditions and feature locations may vary due to errors associated with GPS surveying. All mapping methods and digital raster graphic (DRG) imaging errors portrayed on this map.

Projection: Wyoming State Plane
East Zone
North American Datum 1983 (NAD83)
U. S. Feet



Department of Environmental Quality



To protect, conserve and enhance the quality of Wyoming's environment for the benefit of current and future generations.

Dave Freudenthal, Governor

John Corra, Director

December 2, 2008

Mountain Cement Company
5 Sand Creek Road
Laramie, WY 82070

RE: Permit No. 658


Dear Mr. Kersey:

Enclosed is an Annual Report Form for your use in reporting all mining and reclamation activities in the referenced permit area since the last report. The time period covered by your Annual Report is the 12-month period ending no more than 60 days prior to this year's due date, February 28, 2009. Please specify the exact dates covered by your report. This report is required by W. S. §35-11-411(a).

Upon receipt and review of the report, you will be contacted by a District Staff member to arrange the annual inspection.

If you have questions, please contact the appropriate permit coordinator if known to you, or Lowell Spackman at 307.777.7052 or lspack@wyo.gov.

Sincerely,


Becky Brosius
District I
Land Quality Division

/bb
Enclosure

