



United States Department of the Interior

FISH AND WILDLIFE SERVICE

Ecological Services
4000 Airport Parkway
Cheyenne, Wyoming 82001

In Reply Refer to:
ES-61411/ Mines/WY7236

June 3, 2003

Joyce Holmes
Wyoming Department of Environmental Quality
Herschler Bldg, 3rd Floor West
122 West 25th Street
Cheyenne, Wyoming 82002



Dear Ms. Holmes:


Thank you for the notification requesting that the U.S. Fish and Wildlife Service (Service) review the 2002-2003 annual report for Mountain Cement Company's Weaver Quarry Permit 658. The Weaver Quarry is located in Albany County, Wyoming. Since the 2002-2003 annual report for the Weaver Quarry Permit contains no information regarding habitat, wildlife or plant species occurring in the permit area, the Service is unable to review the document to determine if the mine is operating in accordance with the Endangered Species Act (Act) of 1973, as amended (16 U.S.C. 1531 *et seq.*) or the Migratory Bird Treaty Act (MBTA), 16 U.S.C. 703.

In letters, dated April 25, 2000, May 30, 2001, and February 21, 2002, the Service informed the Department of Environmental Quality that the Mountain Cement Weaver Quarry could have suitable habitat for mountain plover (*Charadrius montanus*), a federally listed species. Additionally, raptors, protected under the MBTA, may nest in the rocky outcrops and juniper ravines in the permit area. Since the annual report contains no information on federally listed species or migratory birds, the Service is unable to evaluate the effects of mining activities, at the Weaver Quarry, on these species.

We thank the Department of Environmental Quality for ongoing cooperation with our office to ensure the conservation of federally listed species in Wyoming. If you have any questions

regarding this letter or your responsibilities under the Act, please contact Trish Sweanor at our office at (307) 772-2374, ext 39.

Sincerely,

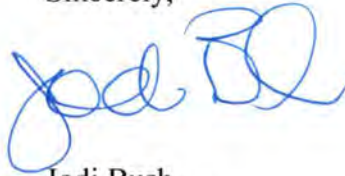

Jodi Bush
Acting Field Supervisor
Wyoming Field Office

cc: WGFD, Statewide Habitat Protection Coordinator, Cheyenne, WY (T. Collins)
WGFD, Non-game Coordinator, Lander, WY (B. Oakleaf)

Mountain Cement Co. 6-5-03



MEMORANDUM

To: Bill Hogg, Permit Coordinator

From: Steve Ingle, Hydrogeologist *SI*

Date: April 3, 2003

Subject: Total Petroleum Hydrocarbon values at Permit #298c and Permit #658.

The latest groundwater quality value from the MCC Permit 298c Annual Report, contains 2.85 mg/l Total Petroleum Hydrocarbon (TPH). The well was sampled July 30, 2002. The sample results were not received until the Annual Report was received by LQD on March 28, 2003. The groundwater sampling results in the 2002 Annual Report contain a trace of TPH. Page MPVII-13 of the mine permit states that, "If changes in quality or quantity occur, MCC will contact the State of Wyoming Land Quality Division."

The TPH value for Permit 298c does not appear to be spatially related to the high values reported from the Weaver Quarry (Permit #658).

There are several possibilities for the elevated TPH values.

1. The values may represent separate contaminant plumes from MCC's operations.
2. The values may represent contaminant plumes not related to MCC's operations.
2. There may be a problem with the lab. Bill Sansing, with Mountain Cement stated that the lab (Wyoming Analytical Laboratory) changed analytical techniques approximately a year ago. There may be something with the lab technique that is giving incorrect results.
3. There may be a field sampling problem, due to contaminated sampling equipment or field sampling protocol.

Related Comments

1. The permit lists the wells to be sampled using State Engineer's Office (SEO) permit numbers. The Annual Report lists the well as the Heggie Well. This well should be identified by the SEO number and shown on a map.
2. MCC had agreed to provide a sampling protocol for the Weaver Quarry well. The sampling protocol must be provided.

Mountain Cement
Permit #298c, Permit #658
April 3, 2003
Page #2

The Annual Report for Permit #298c states that the sampling will be repeated in the near future. The samples will be duplicated and sent to two different laboratories for analysis and trip blanks will also be analyzed. The Annual Report does not specify when the well would be resampled. It is recommended that the well be resampled within 30 days and sampling results submitted to LQD within 45 days from receipt of this letter. The field and laboratory protocol can be documented when the well is sampled and submitted along with the sampling results.

cc: Christine Mielnicki



The State
of Wyoming



Department of Environmental Quality

Dave Freudenthal, Governor

Herschler Building • 122 West 25th Street • Cheyenne, Wyoming 82002

ADMIN/OUTREACH	ABANDONED MINES	AIR QUALITY	INDUSTRIAL SITING	LAND QUALITY	SOLID & HAZ. WASTE	WATER QUALITY
(307) 777-7758 FAX 777-3610	(307) 777-6145 FAX 777-6462	(307) 777-7391 FAX 777-5616	(307) 777-7368 FAX 777-6937	(307) 777-7756 FAX 777-5864	(307) 777-7752 FAX 777-5973	(307) 777-7781 FAX 777-5973

HAND DELIVERED
February 26, 2003

Mr. William Sansing
Mountain Cement Co.
5 Sand Creek Road
Laramie, WY 82070

RE: **Permit 658, Mountain Cement Company (MCC), Weaver Quarry,
2002-2003 Annual Report**

Dear Mr. Sansing:

Land Quality Division (LQD) received your 2002-2003 Annual Report on February 7, 2003. LQD has reviewed the report and has determined that compliance problems exist that must be mitigated immediately. The ground water monitoring results submitted with the Annual Report indicates that high levels of Petroleum Hydrocarbons were present during the 2002 sampling. Further investigation revealed that MCC had not sampled to obtain base line data, prior to the commencement of mining as required in the 658 permit. Also, MCC has not sampled annually as required in the permit and the spike in petroleum hydrocarbons may be mine related.

In order to avoid enforcement action, MCC will be required to:

- 1 Submit a sampling methodology and protocol revision for ground water sampling;
- 2 Meet with LQD ground water personnel to determine a suitable location for an up gradient well that will simulate base line data;
- 3 Re-test the existing monitoring well;
- 4 Install an up gradient monitoring well;
- 5 Depending on re-testing results, establish a down gradient monitoring well for future ground water monitoring.

LQD will require that the above actions be completed within 60 days of the receipt of this letter. If you have questions regarding this letter, please contact me at 307-777-7057.
Sincerely,

Bill Hogg

Bill Hogg
Land Quality Division

Attached memo from Christine (2-20-03) + Steve Ingle (2-20-03)

22

MEMORANDUM

To: Bill Hogg, Permit Coordinator

From: Steve Ingle, District I *hV*

Date: February 20, 2003

Subject: Mountain Cement, Weaver Quarry, 2002-2003 Annual Report review, Permit #658

This memo is to supplement Christine Mielnicki's review of the groundwater portion of Mountain Cement's Weaver Quarry Annual Report. There are two additional items that need to be added to her review.

1. The contaminated groundwater monitoring well is located west of the permit boundary. If the source of the contamination is determined to be the mining operation, then there may be cause for enforcement action.
2. Page MP-15 of the permit requires Mountain Cement to measure the water level in the monitor well. No water level information was supplied. Please measure the water level in the well. The water level should be measured at the same time that the water quality confirmation sample is taken.

cc: Christine Mielnicki

AKJ

MEMORANDUM

TO: File of Permit 658 Mountain Cement, Weaver Quarry

FROM: Christine Mielnicki; Surface Water Hydrologist (CM)

DATE: February 20, 2003

RE: Annual Report (AR) Groundwater Well Data

COMMENTS

1. Groundwater monitoring was to be conducted prior to disturbance associated with mining activities in 1997, to establish a baseline. Monitoring did not begin until the 1999 AR. No groundwater sampling was conducted the following year. As identified in the above referenced permit, on page MP-15, Section MP4.5.9, Surface Water and Ground Water Monitoring During Mining, "The analysis will begin before mining activities start, to obtain baseline groundwater chemical and physical characteristics." Please identify groundwater wells within the same aquifer and provide water quality data, in order to establish a baseline for groundwater quality. (CM)
2. Groundwater sampling results for the current AR show an unacceptably high level of Total Petroleum Hydrocarbons (TPH) (4.1 mg/L). On page MP-15, "Should any substantial changes occur to groundwater potentially resulting from mining activities, MCC will then install a monitoring well up gradient on the piezometric surface from the mine site. Please establish a groundwater monitoring sampling program to identify any impacts to groundwater resources from mining activities. This should include at a minimum three monitoring wells: on up-gradient, the existing well and one down-gradient to identify any potential groundwater impacts from outside sources.(CM)
3. Groundwater sampling results for the current AR show an unacceptably high level of Total Petroleum Hydrocarbons (4.1 mg/L). Please provide text on sampling methodology and protocol for groundwater sampling at this well. Please re-test the well for this parameter to eliminate any sampling technique error.(CM)
4. Should unacceptably high level of TPH be determined to be an accurate representation of groundwater quality after re-testing has occurred the following rules and regulations under DEQ-Water Quality Division, Storm Water Permit for Mineral and Associated Activities (WYR000368) issued to Mountain Cement apply:
 - A. Under Part 7, Section 7.9 Oil and Hazardous Substance Liability, "Nothing in this permit shall be construed to preclude the institution of any legal action or relieve the permittee from any responsibilities, liabilities, or penalties to which the permittee is or may be subject under section 311 of the Clean Water Act. According to Chapter 4 of the Wyoming Water Quality Rules and Regulations **any spill or other release of hazardous substances, fuels, oils or other petroleum product must be**

contained and cleaned up in a timely and diligent manner. Any spill or release of more than 25 gallons, or which results in a visible sheen on water, or a visible deposit on the bottom or shoreline of any water body, must be reported to the Water Quality Division of the Wyoming Department of Environmental Quality within 24 hours to the department's 24 hour telephone number (307-777-7781). Records of such spills or releases must be maintained for at least three years.

- B. Under Part 4, Section 4.4, The Storm Water Pollution Prevention Plan (SWPPP) shall be implemented immediately upon notification of coverage under this permit. The permittee shall modify the plan whenever there is a change in design, construction, operation, or maintenance that changes the potential for the discharge of pollutants to waters of the state. **The plan shall also be modified, if the plan proves to be ineffective in eliminating or minimizing pollutants present in storm water.** Amendments to the SWPPP must be retained on site and may be reviewed by the Administrator as described below.
- C. Under Part 7, Section 7.16, The permittee shall make the SWPPP available upon request to the Administrator or agent thereof; any federal, state or local agency; interested members of the public; local government officials; or to the operator of a municipal separate storm sewer receiving discharges from the site. The permit does not require that free copies of the plan be provided to interested members of the public, only that they have access to view the document and copy it at their own expense. The copy of the SWPPP must be made available to the Administrator, or authorized agent, for review at the time of an onsite inspection.

Cc: Bill Hogg; LQD

Joyce Holmes - annual reports received

From: Joyce Holmes
To: Bush, Jodi; deibert, pat; long, michael
Date: 2/7/2003 2:24 PM
Subject: annual reports received
CC: Hogg, Bill; Spackman, Lowell

LQD received the 2002-2003 annual report for Mountain Cement - Weaver Quarry in Albany County, Permit 658 on 2/7/03.

LQD received the 2002-2003 annual report for Mountain Cement - Tuffa Pit, Permit 299c on 2/7/03.

Please review.

Thanks



**MOUNTAIN
CEMENT COMPANY**

5 Sand Creek Rd.
Laramie, Wyoming 82070
(307) 745-4879 Fax (307) 742-4534

Hand Delivered

LKS JKH
BH ✓

February 6, 2003

Mr. Bill Hogg
District I
Land Quality Division
Herschler Building
122 West 25th Street
Cheyenne, WY 82002

Dear Mr. Hogg:

Mountain Cement Company is submitting the 2002-2003 Annual Report for the Weaver Quarry (Permit No. 658). Sizes of stockpiles and disturbed areas were checked this year with a GPS and are thought to be more accurate than in past years.

As always, please feel free to call me at extension #121 if you have any questions or comments.

Sincerely,

William A. Sansing
Environmental Manager
Mountain Cement Company

enclosure



MOUNTAIN CEMENT COMPANY
PERMIT #658-WEAVER LIMESTONE QUARRY

ANNUAL REPORT
AND
MINE AND RECLAMATION PLANS

MARCH 1, 2002 - FEBRUARY 28, 2003

SUBMITTED TO:

WYOMING DEPARTMENT OF ENVIRONMENTAL QUALITY
LAND QUALITY DIVISION
HERSCHLER BUILDING
CHEYENNE, WYOMING

REPORT PREPARED:

FEBRUARY 6, 2003

PREPARED BY:

WILLIAM SANSING
MOUNTAIN CEMENT COMPANY
5 SAND CREEK ROAD
LARAMIE, WY
(307) 745-4879



TABLE OF CONTENTS

ANNUAL REPORT FORM	3
MINE AND RECLAMATION PLAN SUMMARY	8
Introduction	8
Mine Plan	8
Past mining Activities	8
Probable Future Mining Activities	8
Reclamation Plan	9
Past Reclamation Activities	9
Future Reclamation Activities	9
Estimated Reclamation Costs	9

TABLES

TABLE I - Description of Weaver Quarry lands. (Includes acreage projected to be disturbed during the upcoming report period)	11
---	----

TABLE II - Estimated Reclamation Costs for Disturbances through February 28, 2003 and Projected Disturbances for the 2003-2004 Report Period, Weaver Quarry, Permit No. 658.	12
---	----

ATTACHMENT

Report of Analysis (Well Water Sample, August 1, 2002)
Two Annual Report Maps, March 1, 2002 - February 28, 2003



FOR LARGE MINING OPERATIONS

1.	Name of Permittee: Address: Telephone Number: Mining Permit Number: Date of Permit Issuance (and any amendment) Mineral(s) Mined: State and Federal Mineral Lease Numbers:	Mountain Cement Company 5 Sand Creek Road Laramie, Wyoming 82070 [307] 745-4879 658 – Weaver Quarry February 29, 1996 Limestone None
----	---	---

3. **Mining:**

(a) Tabulate acreage disturbed (by pits, roads, facilities, etc.) during the report period and illustrate on map.
23.4 acres disturbed during 2002-2003 report period

(b) Tabulate acreage affected to date by years and illustrate on map.
19.2 acres disturbed during 1997
17.1 acres disturbed during 2000
23.4 acres disturbed during 2002
59.7 total acres disturbed since mine start-up

(c) Tabulate all topsoil stockpile volumes, date of stockpiling and illustrate on map.
2,300 CY-Road (1997)
10,700 CY-Mining Area (1997)
10,150 CY-Mining Area (2000)
9,450 CY –Mining Area (2002)
32,600 CY-total since mine start-up



- (d) Tabulate all out-of-pit spoil volumes, date of placement and illustrate on map.

15,000 CY-overburden (1997)

23,500 CY-overburden (2000)

41,500 CY-overburden (2002)

80,000 CY-total since mine start-up

- (e) Tabulate quantity of commodity mined by years.

124,376 tons of limestone mined in 1997

100,500 tons of limestone mined in 1998

148,520 tons of limestone mined in 1999

361,150 tons of limestone mined in 2000

530,950 tons of limestone mined in 2001

513,823 tons of limestone mined in 2002

1,779,319 tons of limestone mined since start-up

- (f) Describe any new construction during the report period and illustrate on map; include:

1. Shop facilities, erection sites **None**

2. Roads **The entrance road to the Harney Creek crossing was asphalt-paved**

3. Culverts **None**

4. Diversion ditches, collector ditches, interceptor ditches, etc. **None**

5. Sediment ponds, containment ponds **None**

6. Monitoring sites **None**

- (g) Describe any environmental problem areas and a proposed plan for mitigating them-illustrate on a map.

1. Pit stability problems **None**

2. Subsidence **None**

3. Accidental water discharge, dam failure, etc. **None**

4. Slumping or sliding **None**

5. Revegetation problem areas **None**

4. **Reclamation:**

- A. Tabulate the acreage completed during the report period and illustrate on map. Distinguish between: **There was no reclamation performed during this report period.**

1. Backfilled, graded, and contoured. Including date of approval for coal permits.



2. Topsoiled
 3. Seeded
 4. Reseeded
 5. Indicate where special construction or reclamation practices were used such as for sand bodies or alluvial material.
- B. Submit a map showing the reconstructed contours. The map must be the same scale and contour interval as the PMT map in the approved permit. **None completed**
- C. Tabulate acreage reclaimed (seeded with permanent seed mix) to date by years and illustrate on map. **No seeding was performed during this report period.**
- D. Describe reclamation procedures used during the report period: **No reclamation occurred during this report period.**
1. Depth of topsoil applied. Indicate whether from stockpile or directly applied.
 2. Type of seed used for seeding during the report period.
 3. Dates of seeding during the report period.
 4. Seeding procedures used
 5. Rate of seed application
 6. Type and rate of any fertilizer applied
 7. Type and rate of mulch applied
 8. Rate of irrigation water applied
 9. Any deviations to the approved reclamation plan including, in addition to the items above, changes to the contour or location of post mining features
- E. Describe results of previous revegetation efforts; include:
- | | |
|--|-------------|
| 1. Types of seed that have germinated and are growing | None |
| 2. Types of seed that are not growing successfully | None |
| 3. Areas experiencing problems with weeds and weed types | None |
| 4. Significant erosional problems | None |
| 5. Areas of unsuitable overburden on the surface | None |
| 6. Procedures used or proposed to correct these problems | N/A |
- F. Summarize the actual reclamation costs incurred during the report period. Costs should be itemized for each operation (i.e., grading, topsoil replacement, seeding, etc.) and for each type of disturbance (i.e., spoil, haul roads, facilities removal, etc.) on a per-acre basis. **None**



- | | | |
|----|--|--|
| 5. | Describe in detail mining plans for the coming year including revised time schedules and all proposed deviations from previously approved plans. Acreage should be tabulated and illustrated on a map. | See Mine Plan Report and Annual Report Map. |
| 6. | Describe in detail reclamation plans for the coming year including revised time schedules and deviations from previously approved plans. Acreage should be tabulated and illustrated on a map. | See Reclamation Plan Report. |

NOTE:

On items 5 and 6 above, any proposed deviation from the approved mine and reclamation plan must be described in detail. The proposed mining and reclamation plans will be reviewed and the operator will be notified if further information is required. "Significant" deviations will require permit revision application (Form 11) and public notice pursuant to Chapter VII Section 2 of Land Quality Division Noncoal Regulations.

7. Describe in detail all monitoring activities during the report period, summarize the data, describe procedures to correct any noted problems and deviations from previously approved methods, including:

A. Groundwater analyses

Groundwater sampling was performed at 7:20am on 8/1/02. Test results are attached to this report. MCC contracted Watson Well Service to assist in removing the well pump and measuring the water level. The water level appeared to be at 42.9 feet; however, the worker was having difficulty with the depth gauge so the results are dubious in my mind.

- B. Surface water analyses and discharge data
C. Precipitation data

**None
None**



D.	Subsidence monitoring	None
E.	Overburden analyses	None
F.	Topsoil quantities-compare calculated and actual	N/A
G.	Vegetation data	None
H.	Wildlife data	None
I.	A map showing and identifying monitoring locations	None

8. Operator's Reclamation Performance Bond Estimate as required by Wyoming Statute §35-11-417. Reclamation cost estimates should be itemized in detail to reflect the actual estimated costs of reclaiming all lands which have been affected to date and those lands to be affected during the next report period. Costs must reflect procedures as specified in the approved mine and reclamation plan. The estimated cost of dismantling and disposal of all facilities and structures must be included. Salvage value will not be used to offset bonding requirements. Reclamation projected for the coming year will not be used to offset bonding requirements. Pit backfill costs must reflect actual yardage to be moved. Actual yardage to be moved will reflect the removal or placement of additional material to correct any deviations between the PMT map and the map submitted for part 4.(b).

**Please refer
to Table II**

9. Supply any additional information as requested by the Division related to:

A.	Notices of Violation	None
B.	Orders	None
C.	Permit Stipulations	None
D.	Other Special Conditions	None

10. All drill holes used for immediate developmental expansion of the advancing pit(s) shall be tabulated by location and depth and shown on the mining plan map. Pursuant to W.S. §35-11-404(e), all drill holes used for exploration shall be reported to the LQD Abandoned Drill Hole Program Supervisor and the State Engineer.

None



INTRODUCTION

Mountain Cement Company continued to mine at the Weaver Quarry WDEQ/LQD Permit No. 658 during the past report period. The area east of the pit has been scraped in preparation for future mining. The area up to the fence has now been disturbed. There is a possibility that the fence will need to be moved further east on the permitted mining property and mining may extend past the current location of the fence. The proposed mining is depicted in the annual map.

MINE PLAN

The following mine plan describes the actual mining activities for the 2002-2003 report period, and possible future mining operations for the 2003-2004 report period at Mountain Cement Company's Weaver Limestone Quarry, Permit No. 658.

Past Mining Activities: Mining continued in the north west corner of the permit area in the SW $\frac{1}{4}$ of Section 26 during the 2002-2003 report period. A total of approximately 30,300 cubic yards of topsoil and 80,000 cubic yards of overburden are contained in the stockpiles. An additional 2,300 cubic yards of topsoil is stockpiled along the side of the haulroad.

Future Mining Activities: Mountain Cement plans to continue mining the site during the next report period, removing approximately 500,000 tons of limestone. Mining will occur in the same pit, expanding it further to the east. At the end of the next reporting period, mining up to the current fence line should be completed. It is possible that the mining may extend slightly east of the fence line; thus, requiring the fence to be moved further east on the mining property.



RECLAMATION PLAN

The following reclamation plan describes actual past reclamation and expected future efforts.

Past Reclamation Activities:

Reclamation has not yet been initiated at this mine site. 1997-1998 was the first year limestone was quarried at this site.

Future Reclamation Activities:

No reclamation is planned for the next report period. Reclamation will follow the Reclamation Plan, which states that reclamation of each mine sequence section will begin within two years after mining is completed in that section. Reclamation will begin after mining progresses further into Section II.

Mountain Cement Company submitted a dirt balance on January 13, 2003 for this quarry to the Division. A revised Mine and Reclamation Plan will be submitted in the near future. The dirt balance indicated that sufficient dirt will exist for reclamation which will be described in the upcoming revised plan.

ESTIMATED RECLAMATION COSTS

Mountain Cement Company's reclamation performance bond estimate for current the disturbances and expected disturbances during the 2003-2004 report period are itemized in Table II. The total reclamation costs plus an additional twenty percent contingency cost, is calculated to be approximately \$155,210. The current bond is for \$120,000. If the Division agrees with the



calculated cost amounts, an increase in the bond amount may be required. Mountain Cement Company will await the Division's determination.



TABLE I - Description of Weaver Quarry lands. (Includes acreage projected to be disturbed during the upcoming report period)

LAND DESCRIPTION	ACRES
PERMIT AREA	1,372.5
AFFECTED AREA	59.7
PROJECTED DISTURBANCE FOR 2003-2004	20.0
LANDS REQUIRING AREA BOND COST	59.7
LANDS REQUIRING FULL INCREMENTAL BOND COST	79.7 — 59.7
LANDS REQUIRING PARTIAL INCREMENTAL BOND COST (Reseeding)	0
LANDS WITH REQUESTED FULL BOND RELEASE, > 2 YEARS	0
LANDS W/ APPROVED FULL BOND RELEASE	0.0
SUBTOTAL(INCREMENTAL BOND TOTAL)	59.7
NATIVE LANDS	1,312.8
TOTAL OF BONDED, BOND RELEASED AND NATIVE LANDS	1,372.5



TABLE II - Estimated Reclamation Costs for Disturbances through February 28, 2003 and Projected Disturbances for the 2003-2004 Report Period, Weaver Quarry, LQD Permit No. 658.

BOND TYPE	RECLAMATION ACTIVITY	APPENDIX LQD, Guideline #12	AVERAGE ONE-WAY HAUL (ft)	UNIT	UNIT COST (\$/unit)	TOTAL (\$)
Area Bond	Backfill + Recontouring	C <i>637 Scrapper</i>	750	80,000 CY of Overburden	5% Resisting Grade @ \$0.70/CY	56,000
Incremental Bond	Miscellaneous Overburden Redistribution	A-G, E1	N/A			
	Demolition (culverts)	J	N/A	5 UNITS (20 ft sections)	69.70/20 ft. section + 8,500	9,370
	Scarification or Ripping (Roads)	II I	N/A	3.0 AC 2.2 AC	663.93/acre 474.92/acre of asphalt	1,992 1,045
	Topsoil Redistribution	C <i>637 Scrapper</i>	750	32,600 CY of Topsoil	5% Resisting Grade @ \$0.70/CY	22,820
	Final Grading	G	N/A ^{79.2}	59.7 AC	38.45/acre	2,295 <i>3,064</i>
	Seeding only	Q	N/A	0 AC	250.00/acre	0
	Seed, Mulch, Prepare soil + Fencing	Q	N/A ^{79.7}	59.7 AC + 0 ft	600.00/acre 1.70	35,820 <i>7,820</i>

Total Land Quality Bond Amount = \$120,000



SUBTOTAL	\$129,342
20% DEQ CONTINGENCY	\$ 25,868
TOTAL	\$155,210

Bill Sansing
Mountain Cement Company
5 Sand Creek Road
Laramie, Wy, 82070

Date: August 13, 2002
Request Number: 19646
Lab Number: H9061
Sample ID: Weaver Well 8-1-02
7:20 AM

REPORT OF ANALYSIS

Hardness, mg/L	214
Alkalinity	189
pH	7.94
Nitrate, As N, mg/L	0.96
Sulfate, mg/L	17.3
Specific Conductivity, μ mhos/cm @ 25°C	389
Total Dissolved Solids, mg/L	265
Total Petroleum Hydrocarbons, mg/L	4.1



MLE:tab

Monte L. Ellis
Monte L. Ellis
Laboratory Manager




WYOMING ANALYTICAL LABORATORIES, INC.

1660 Harrison St.
Laramie, WY 82070

wallaramie@aol.com

(307) 742-7995
Fax: (307) 721-8956



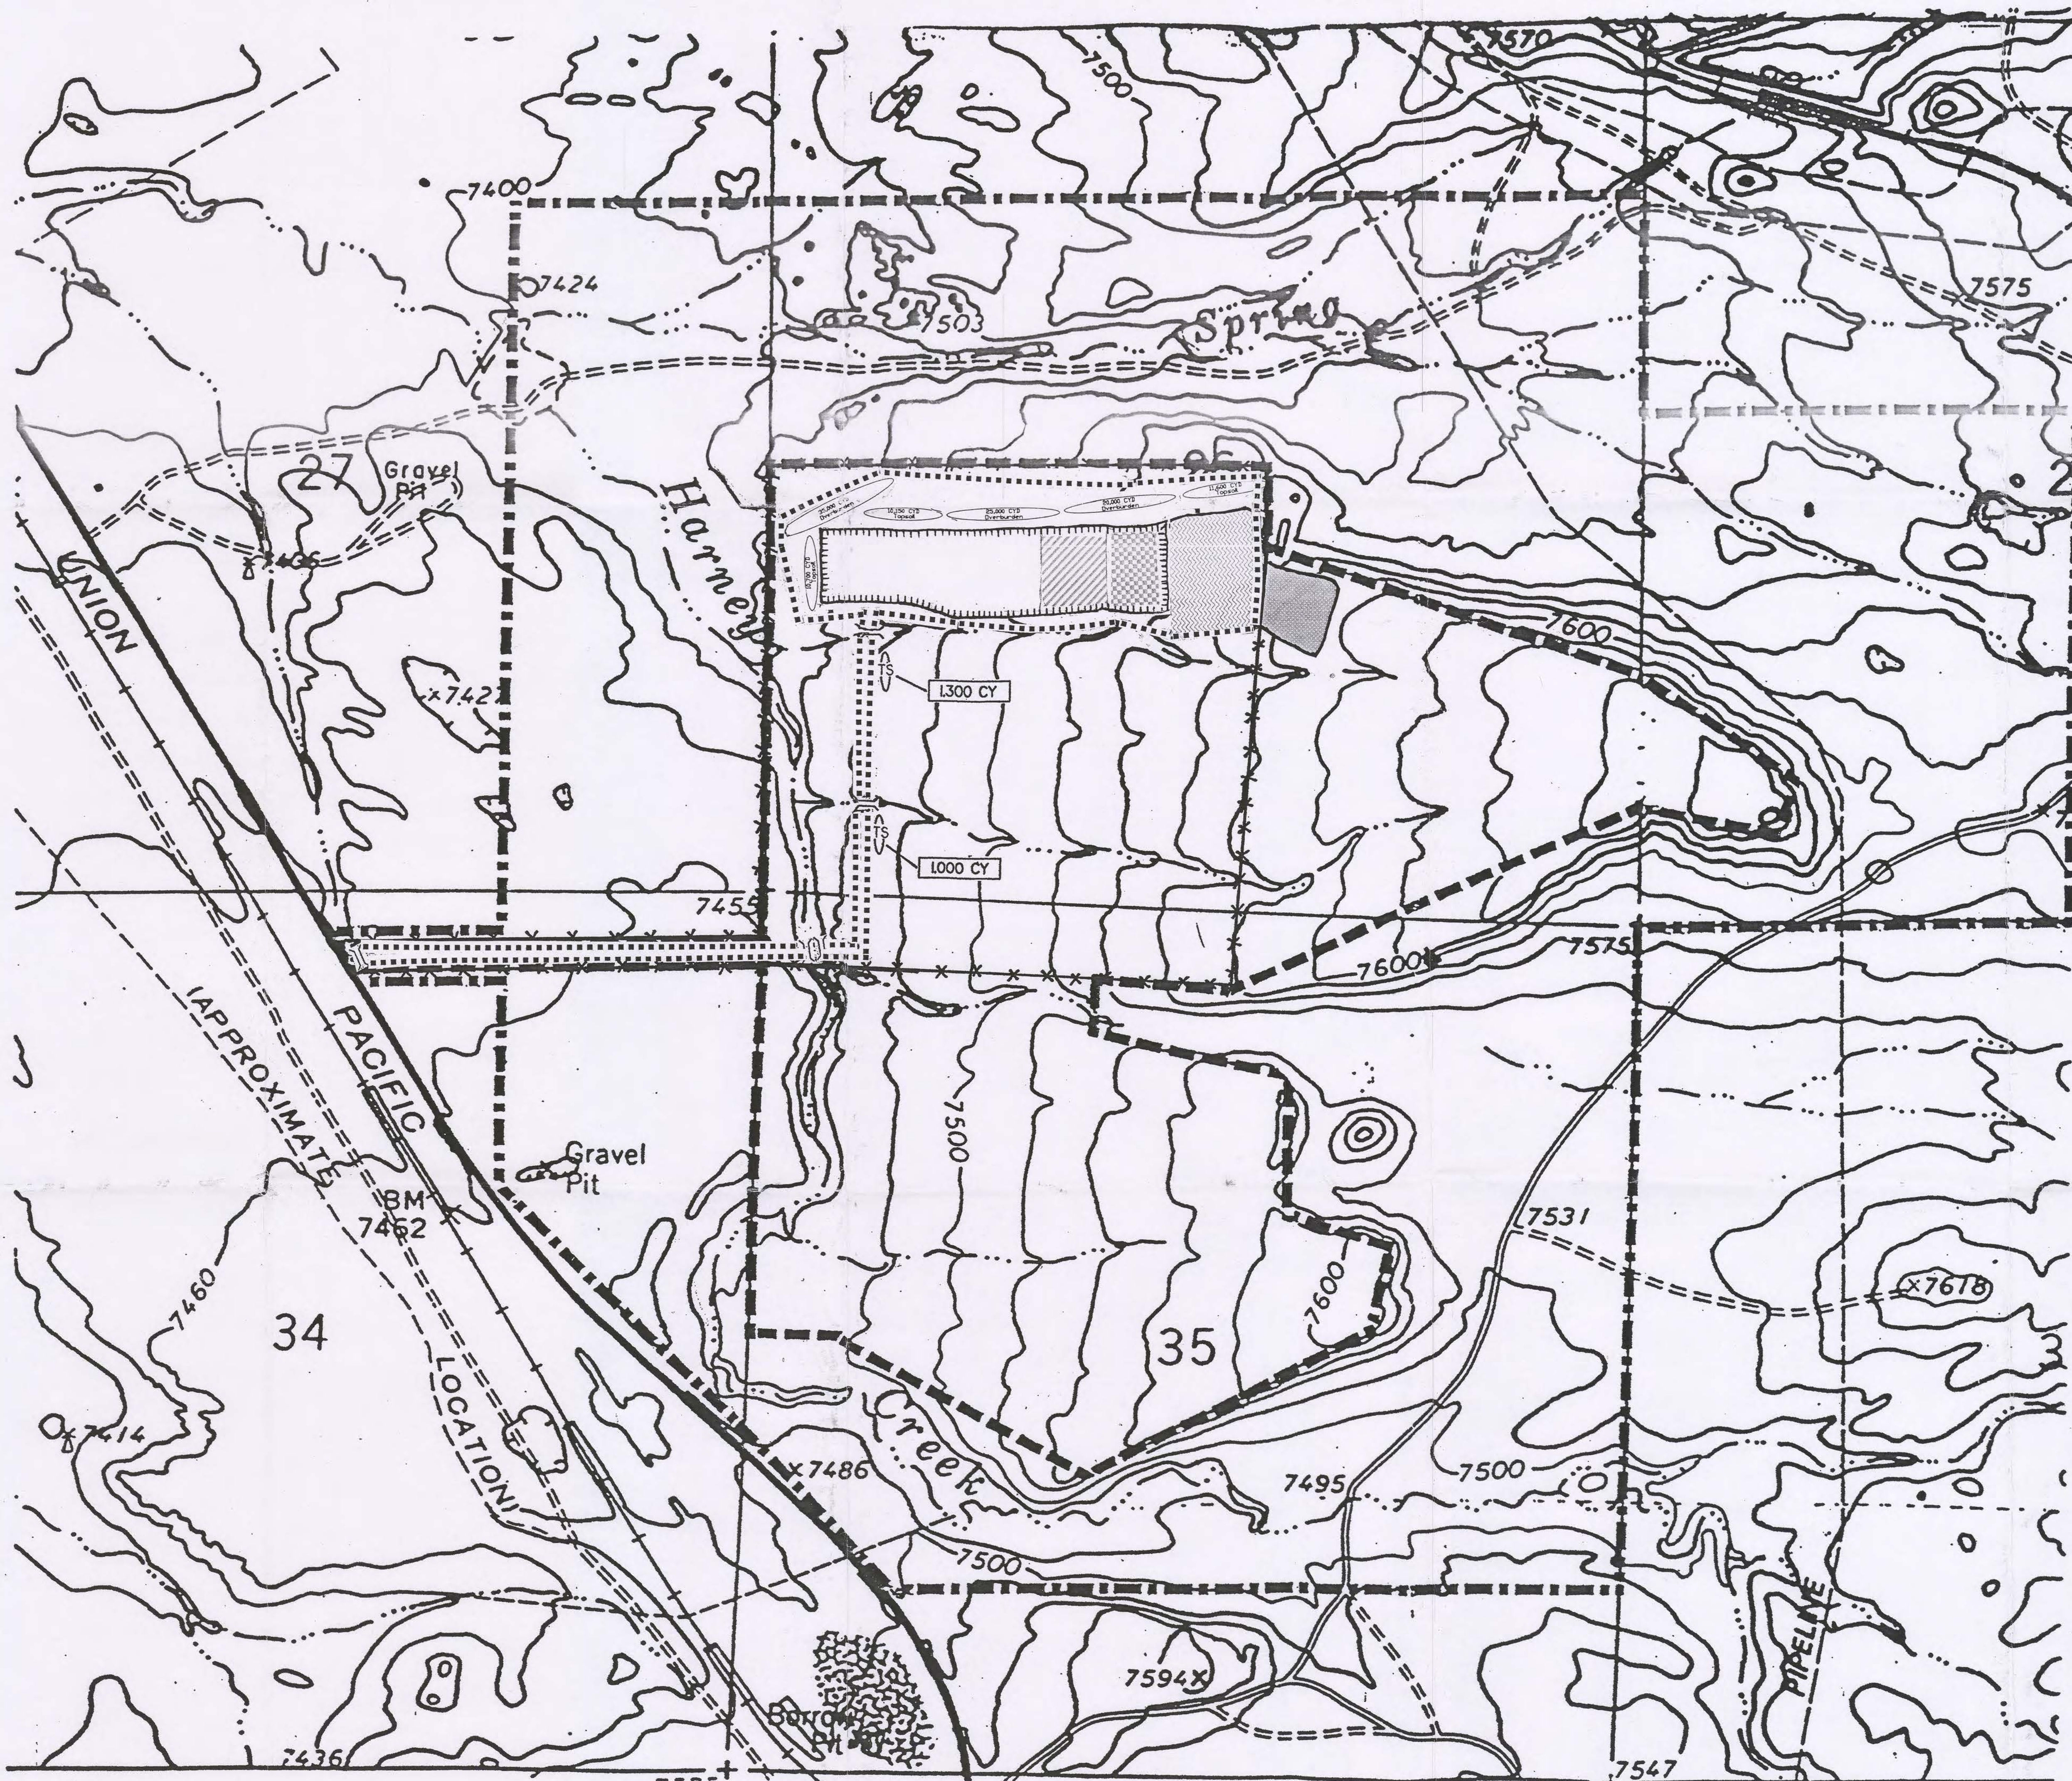

Annual Report Map
WEAVER LIMESTONE QUARRY
Permit No. 658
March 1, 2002 to February 28, 2003

Mountain Cement Company
5 Sand Creek Road
Laramie, Wyoming
(307)745-4879

Township 14N, Range 73W, Sections 26 & 35

SCALE 1" = 500'
CONTOUR INTERVAL 20'

Revised 2/6/03 WS & MB



LEGEND

TS	TOPSOIL STOCKPILE
OB	OVERBURDEN STOCKPILE
---	PERMIT BOUNDARY
----	DISTURBED AREA BOUNDARY
///	AREA MINED BETWEEN 3/1/00 AND 2/28/01
xxx	AREA MINED BETWEEN 3/1/01 AND 2/28/02
...	AREA DISTURBED (SCRAPPED) BETWEEN 3/1/02 AND 2/28/03
■	PROJECTED AREA TO BE MINED BETWEEN 3/1/03 AND 2/28/04
	MINED AREA; PIT WALLS AS OF 2/28/03
==	CULVERT
*****	FENCE LINE



The State
of Wyoming



Department of Environmental Quality

Jim Geringer, Governor

Herschler Building • 122 West 25th Street • Cheyenne, Wyoming 82002

ADMIN/OUTREACH	ABANDONED MINES	AIR QUALITY	INDUSTRIAL SITING	LAND QUALITY	SOLID & HAZ. WASTE	WATER QUALITY
(307) 777-7758 FAX 777-3610	(307) 777-6145 FAX 777-6462	(307) 777-7391 FAX 777-5616	(307) 777-7368 FAX 777-6937	(307) 777-7756 FAX 777-5864	(307) 777-7752 FAX 777-5973	(307) 777-7781 FAX 777-5973

December 17, 2002

Mr. William Sansing
Mountain Cement (Weaver Pit)
5 Sand Creek Road
Laramie, WY 82070

RE: Permit No. 658

Dear Mr. Sansing:

Enclosed is an Annual Report Form for your use in reporting all mining and reclamation activities in the referenced permit area since the last report. The new report will be due on or up to thirty days before February 28, 2003, as required by W.S. §35-11-411. Upon receipt and review of the report, you will be contacted by a District staff member to arrange the annual inspection.

Please contact me if you have any questions.

Sincerely,

Joyce Holmes
District I
Land Quality Division

/jh
Enclosure